
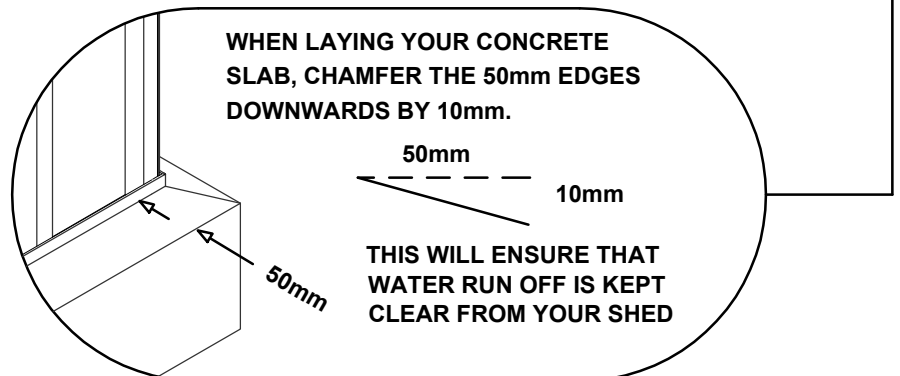


FOR CONSTRUCTION IN
NON-CYCLONIC AREAS
WIND RATING: W33N (N2)

FRONT: 3.00m
SIDE: 2.92m
WALL HEIGHT: 2.035m
GABLE HEIGHT: 2.300m

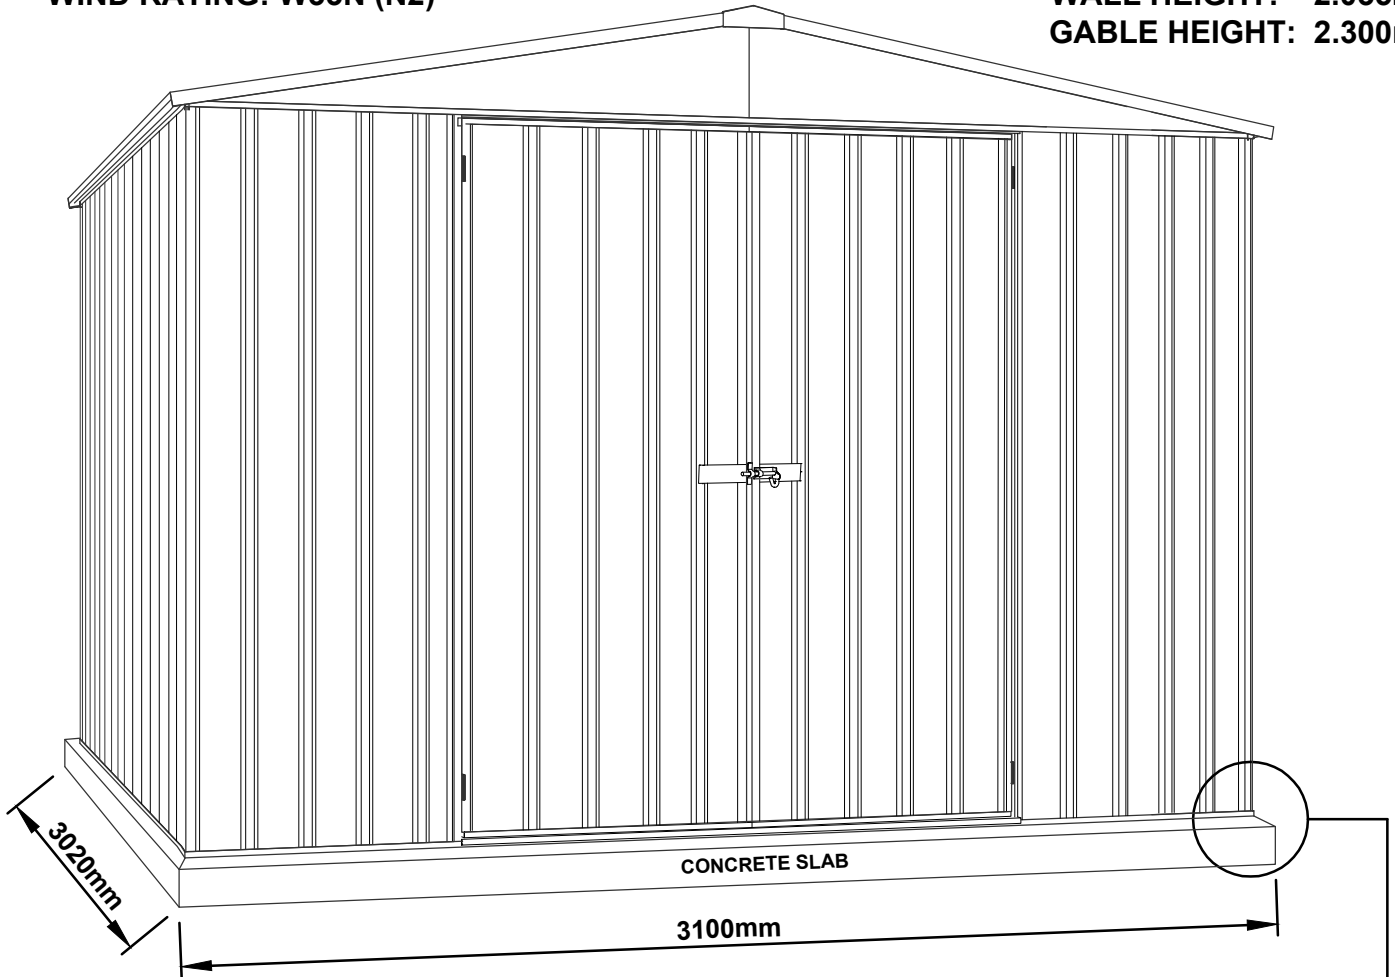

We thank you for choosing an Australian Made Shed. For further assistance please visit our detailed instructional video library at <http://www.absco.com.au/videos.php>

At ABS CO Industries we are always looking to be number ONE, so please let us know what you think of our instructions. Feedback makes us better.
feedback@absco.com.au.

GENERAL INSTRUCTIONS

- Before commencing any assembly, read through these instructions in detail to gain a thorough understanding of assembly methods and associated details.
- Unpack the carton and carefully identify and check off all the parts against the parts described and illustrated on pages three to five.

SITE PREPARATION

- The site for the shed must be level.
- It is recommended that the shed be set on a concrete slab and anchored down appropriately (refer page 15 for details).
- Anchor sets are not supplied as standard items with this product.

TOOLS REQUIRED



3mm
4mm























OPTIONAL

A NOTE ON SAFETY










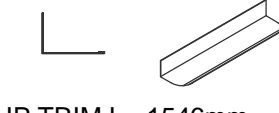








- Some parts may have sharp edges. It is advisable to wear gloves when handling these items and safety glasses if drilling holes. Sensible shoes are highly recommended.
- Do not erect your shed in windy conditions, ensure that the shed is securely anchored to a solid foundation immediately after construction is completed.
- It is highly recommended to erect the shed with two or more people.




COMPONENTS PACKING LIST - CHECK OFF ALL COMPONENTS


QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
2	 STEEL SHEET 2034mm X 773mm	H30		2	GABLE R/H L=1475mm 	16R	
6	 STEEL SHEET 2034mm X 773mm	H31		4	BRACE L: 393mm 	13A	
2	 STEEL SHEET 1546mm X 773mm	44L		1	 CHANNEL L = 2993mm	77A	
2	 STEEL SHEET 1546mm X 773mm	44R		1	 CHANNEL L = 2993mm	55C	
4	 STEEL SHEET 1546mm X 773mm	45A		1	 CHANNEL L = 2993mm	77B	
2	 STEEL SHEET 2034mm X 711mm	H34		1	 CHANNEL L = 2993mm	81B	
4	 STEEL SHEET 2034mm X 731mm	HRC		2	 CHANNEL L = 2993mm	81A	
1	 STEEL SHEET 1974mm X 773mm	F		2	 CHANNEL L = 2919mm	59A	
1	 STEEL SHEET 1974mm X 773mm	E		2	 CHANNEL L = 2919mm	81G	
2	GABLE L/H L=1475mm 	16L		2	 CHANNEL L = 1568mm	78A	

COMPONENTS PACKING LIST - (CONT.) CHECK OFF ALL COMPONENTS

QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
1	 CHANNEL L = 1568mm	79A		2	 JAMB L= 2034mm	HJ1	
2	 CHANNEL WITH HINGES L = 1974mm	HC1		1	 JAMB L= 1568mm	90A	
1	 CHANNEL L = 1974mm	HC2		4	 JAMB L= 1120mm	91A	
4	 CHANNEL L = 773mm	58C		1	 JAMB L= 1974mm	HJ3	
1	 RIDGE BEAM L = 2993mm	97A		4	 LIP TRIM L= 1546mm	87B	
CONTENTS OF FITTINGS PACKET							
220	 SELF TAPPING SCREWS			3	 DOOR PADBOLT	22A	
8	 4mm NUT & BOLT SET SECURE TWO PADBOLTS TO DOOR SHEET			2	 DOOR PADBOLT HASP		
12	 4mm CSK SCREW & NUT SECURE HINGES TO DOOR			18	 3mm POP RIVETS SECURE HINGES TO DOOR (ALTERNATIVE FIXING METHOD)		
1	ASSEMBLY INSTRUCTIONS			2	 DOOR STRAP L: 165mm	12A	
2	 CAP GABLE L: 170mm	14A					

VIEW OF ROOF COMPONENTS

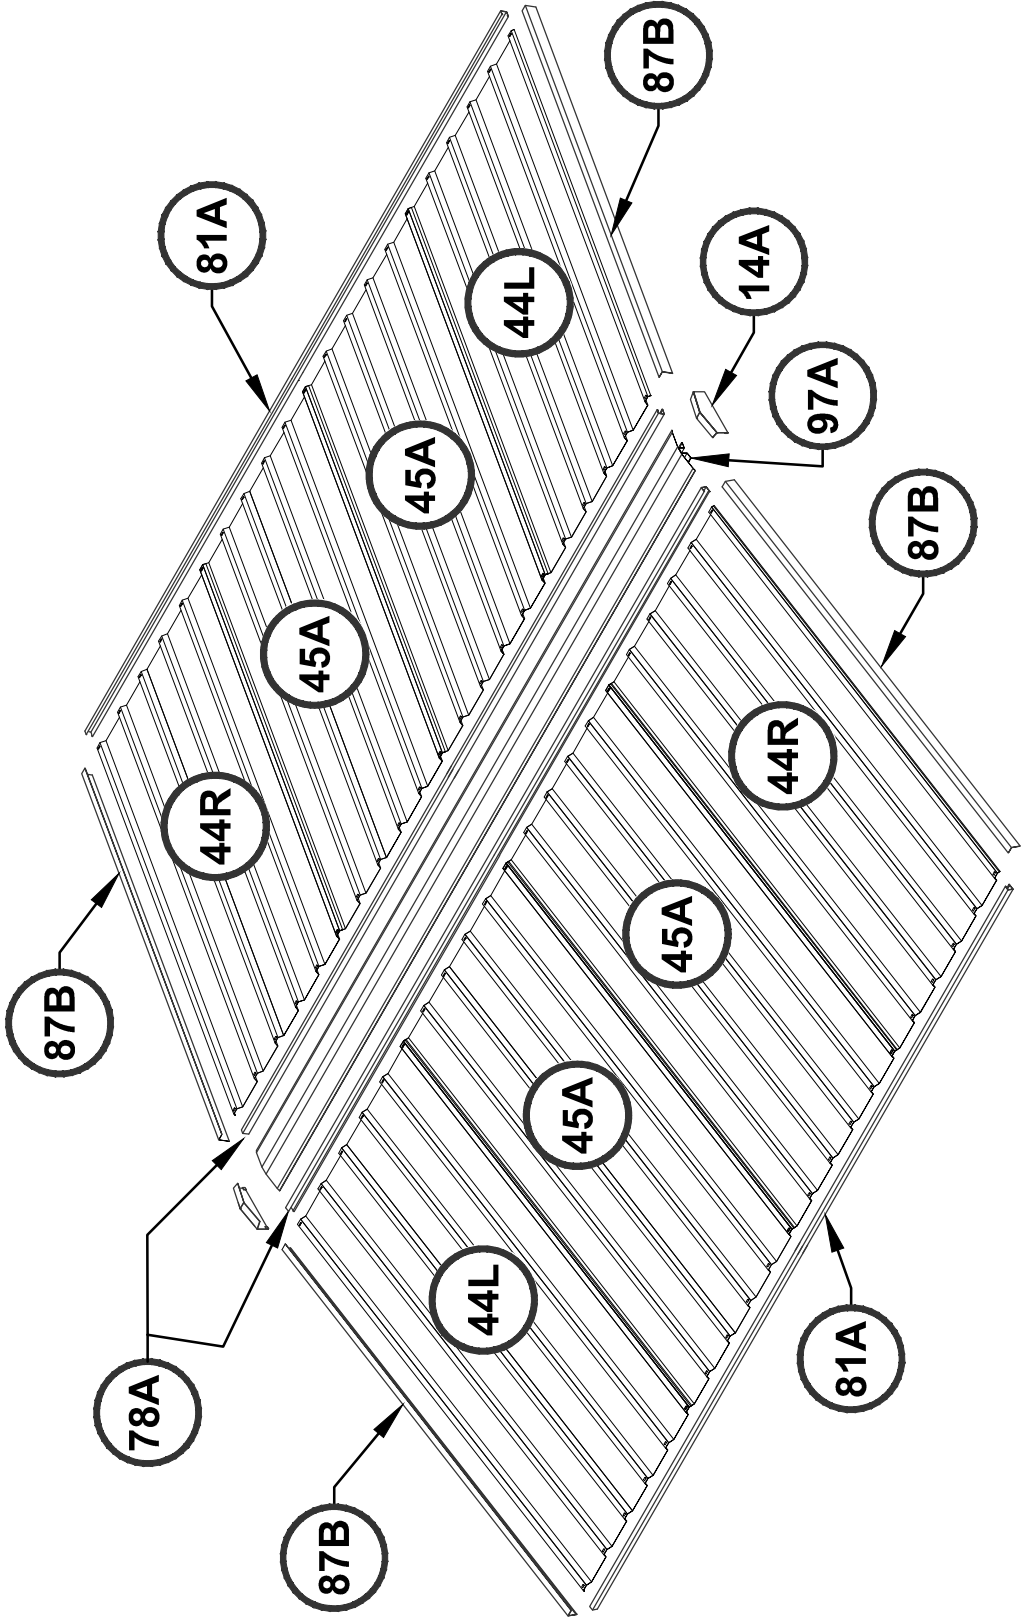


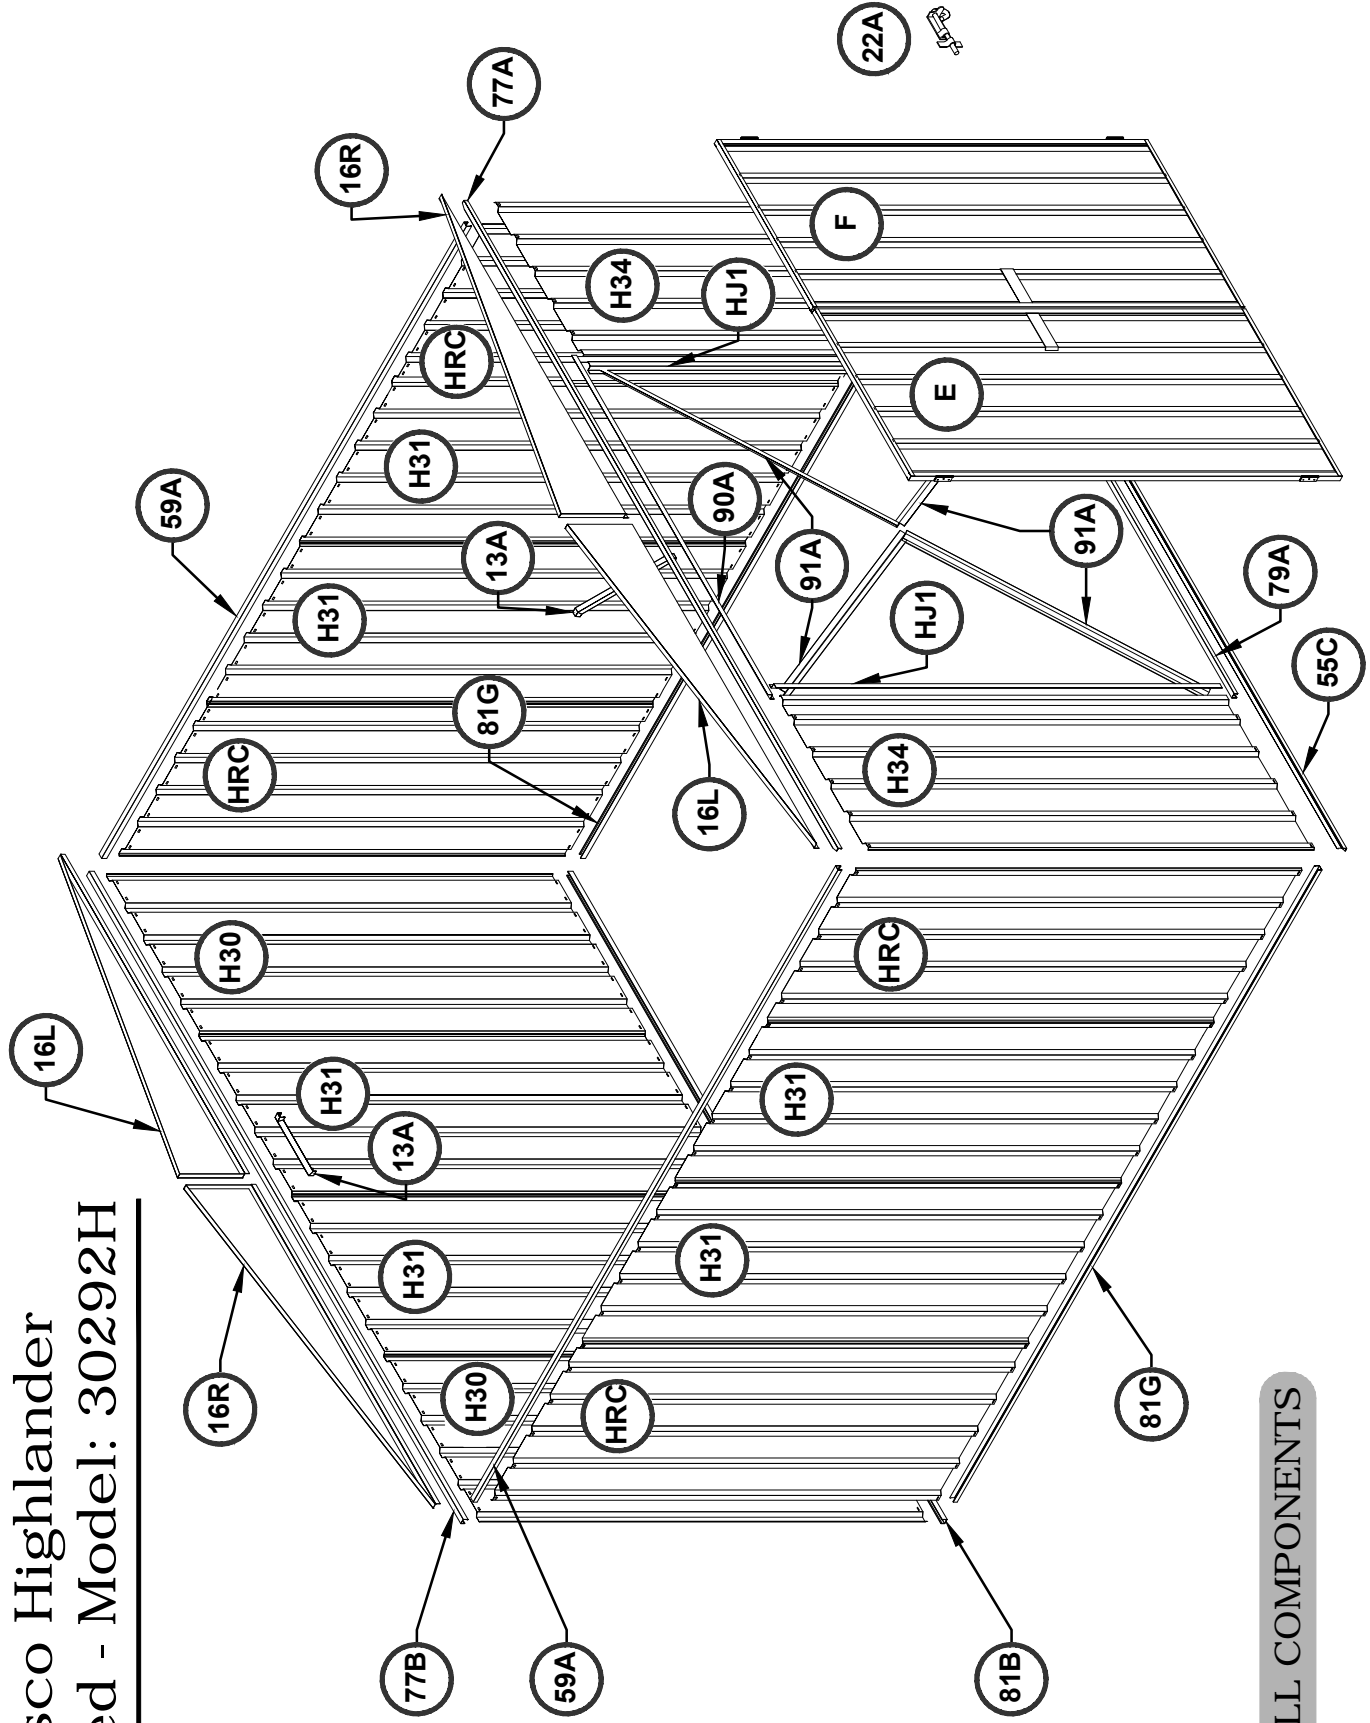








VIEW OF WALL COMPONENTS

ABSCO ASSEMBLY INTRODUCTION

The snap-tite assembly system locks all perimeter channels to all roof and wall sheets without the need for tools and fasteners.

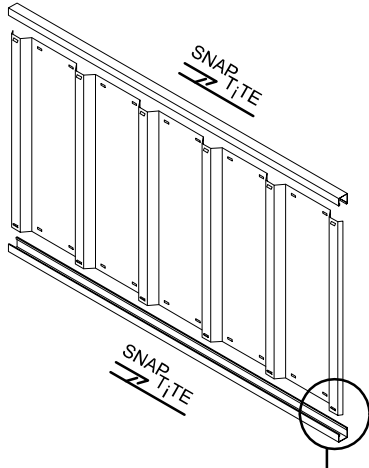

To pre-assemble the four wall panels and two roof panels, the perimeter channels are secured to the top and bottom of each panel using the snap-tite system, as detailed on the following pages wherever you see the symbol.

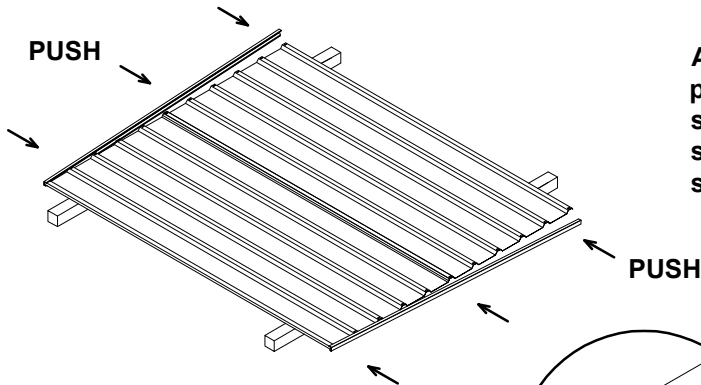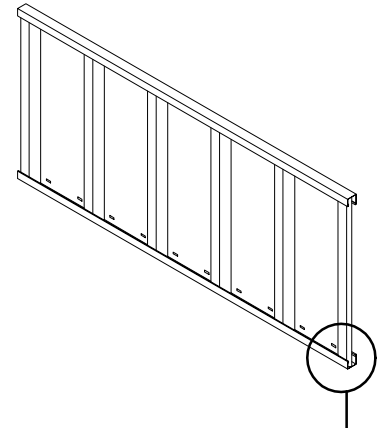

After joining sheets together, position channel over one end of the sheets, gently tapping it over the sheets, working along the sheets to the other end.

Position sheets on timbers, trestles or partly over edge of concrete slab.

FASTENING SYMBOLS



Join components together with one screw at this location only, as some channel sections have extra holes that are not required for this model of garden shed



3mm POP RIVETS




4mm NUT & BOLT SET




Do not join components together at this location yet, as the screw may obstruct further assembly of other components

DOOR PANEL ASSEMBLY

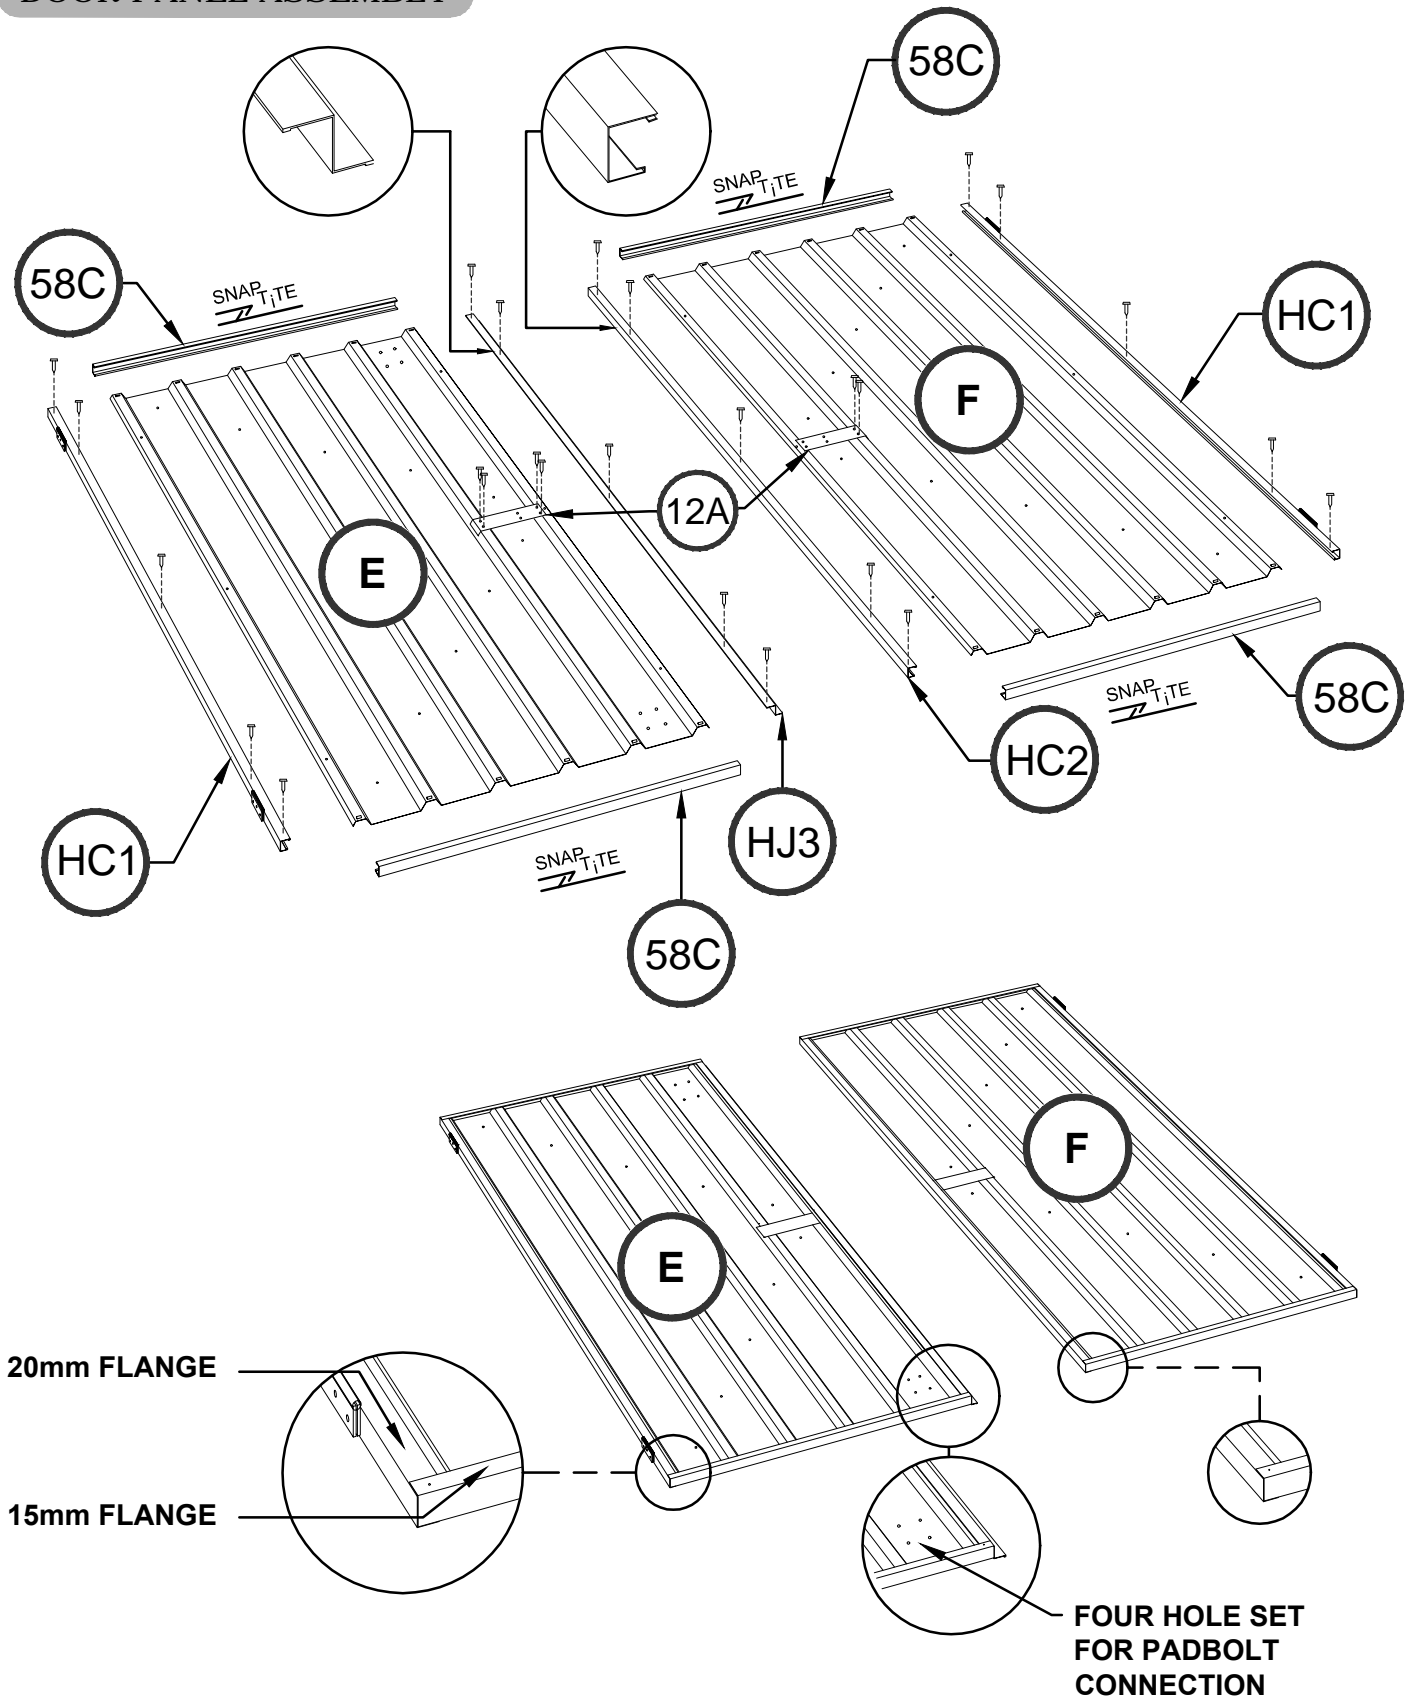


REAR PANEL ASSEMBLY

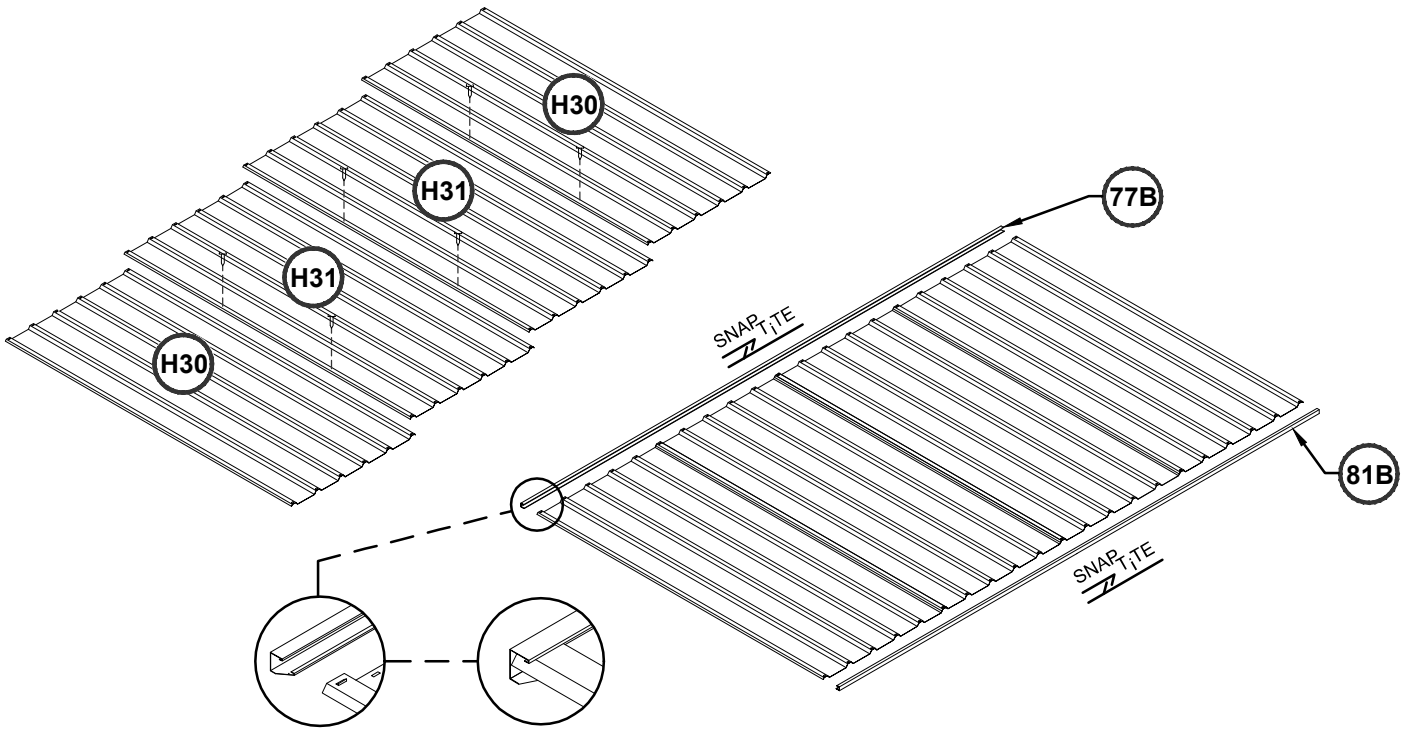


SIDE PANEL ASSEMBLY

(2 Required)

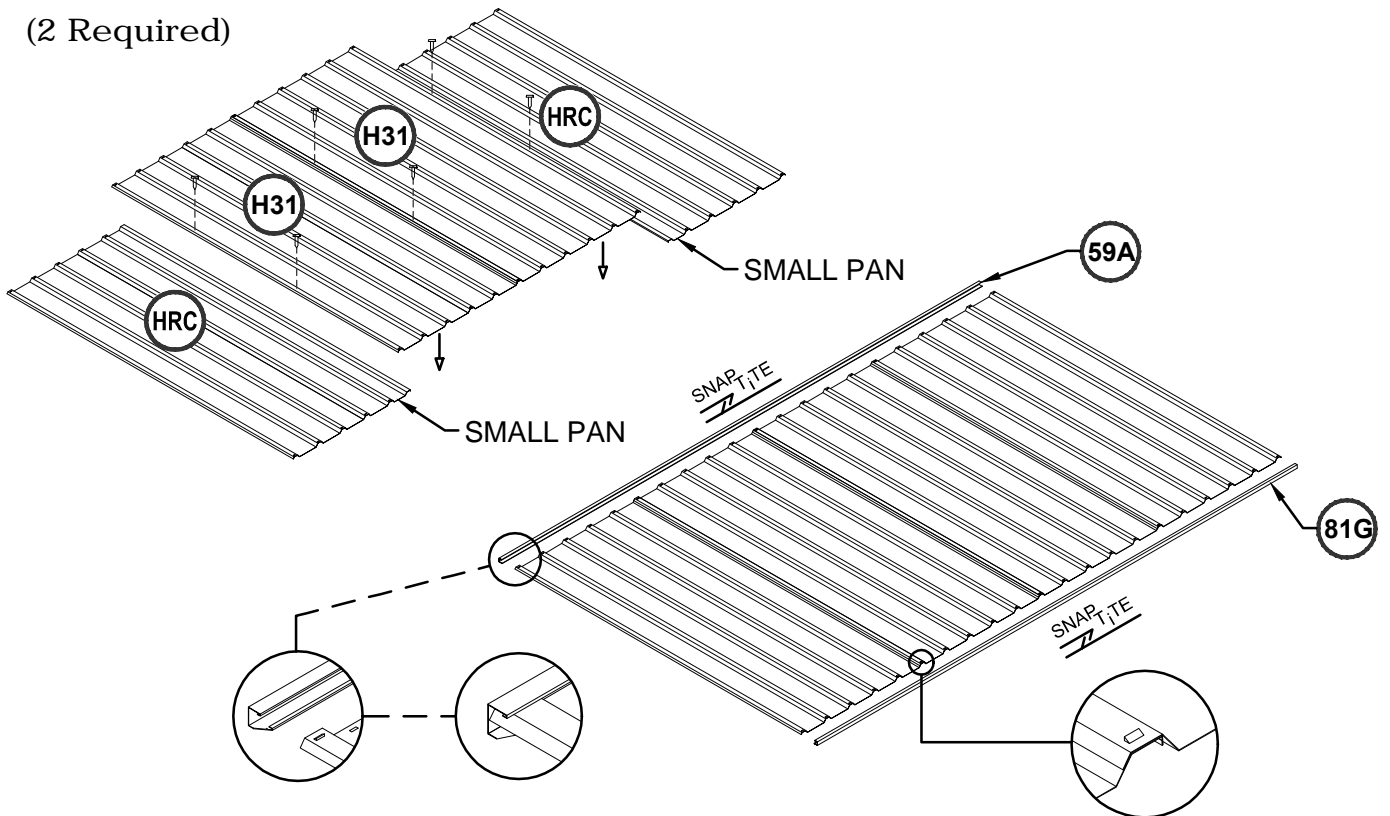


ROOF PANEL ASSEMBLY


(2 Required)

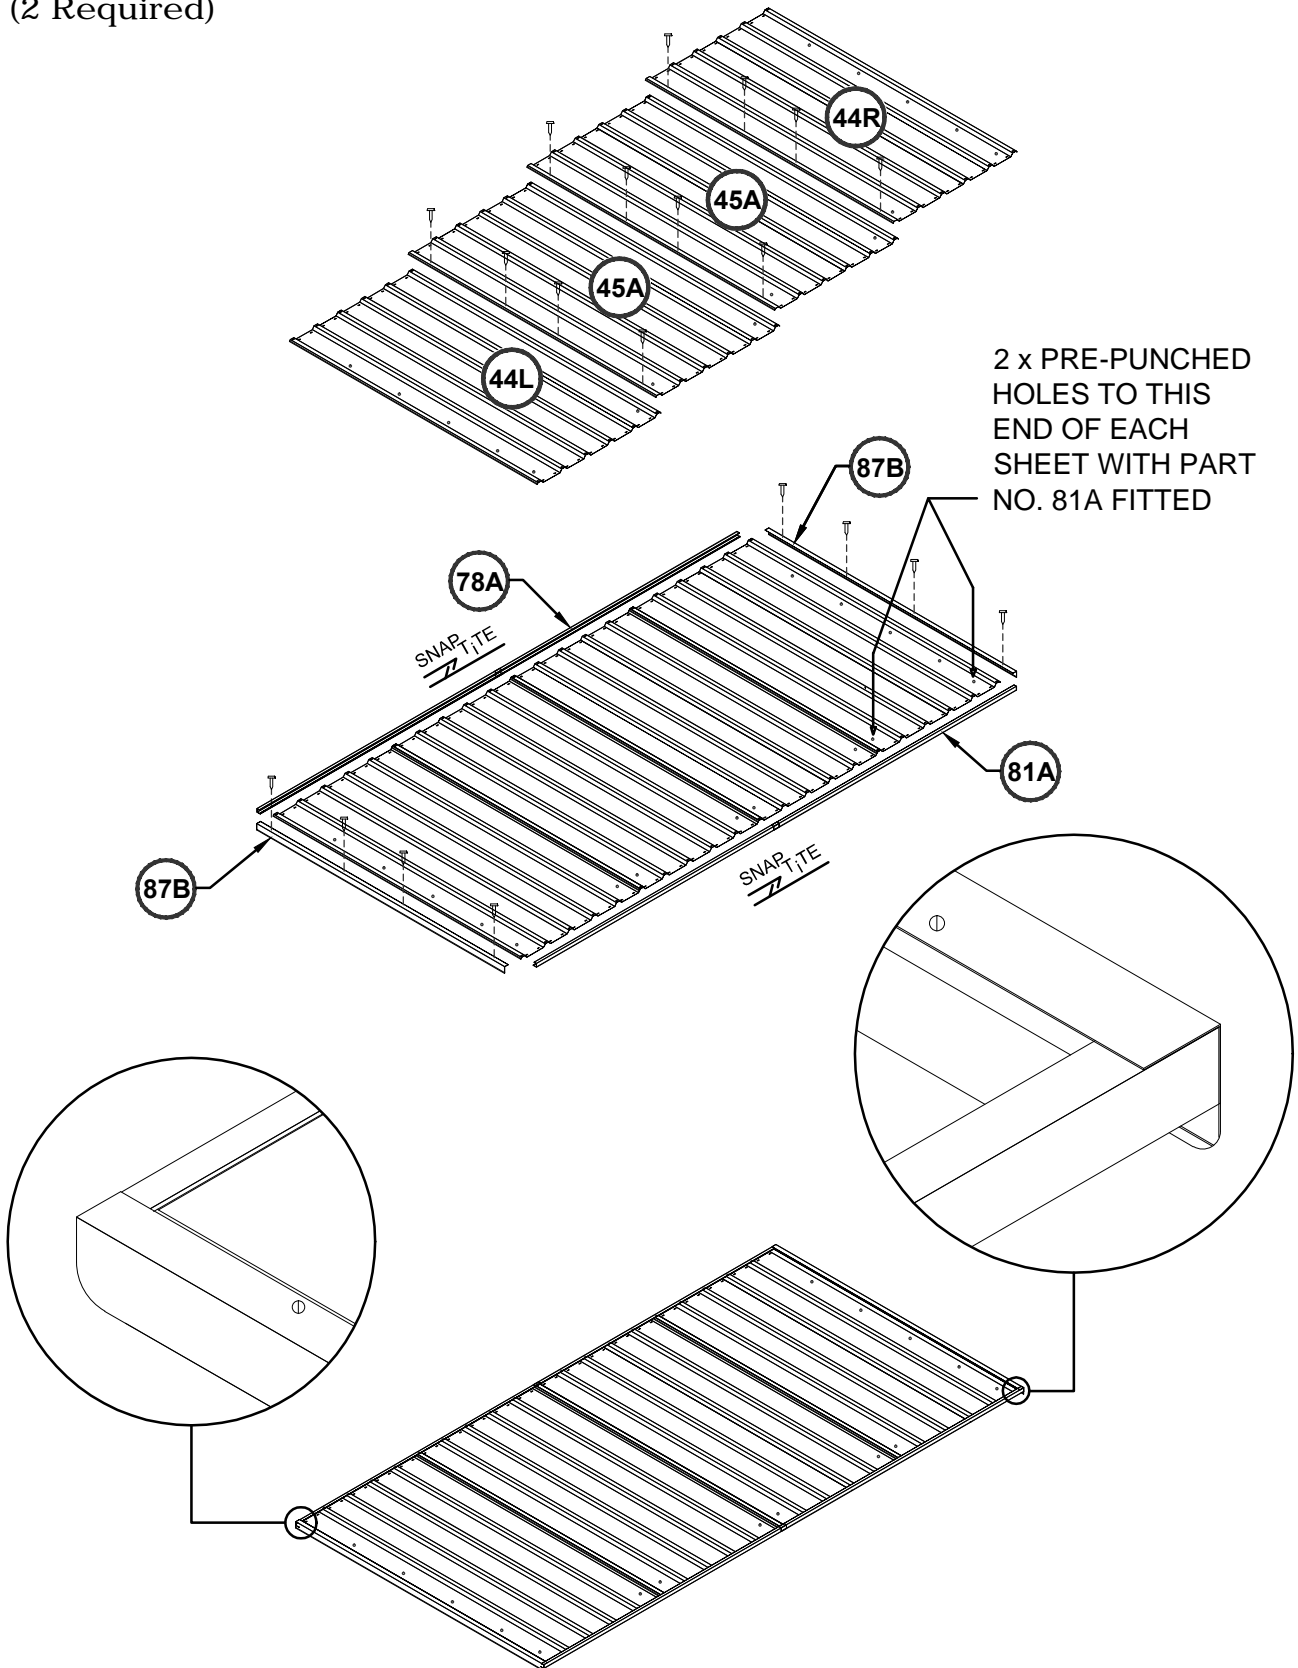

FRONT PANEL ASSEMBLY

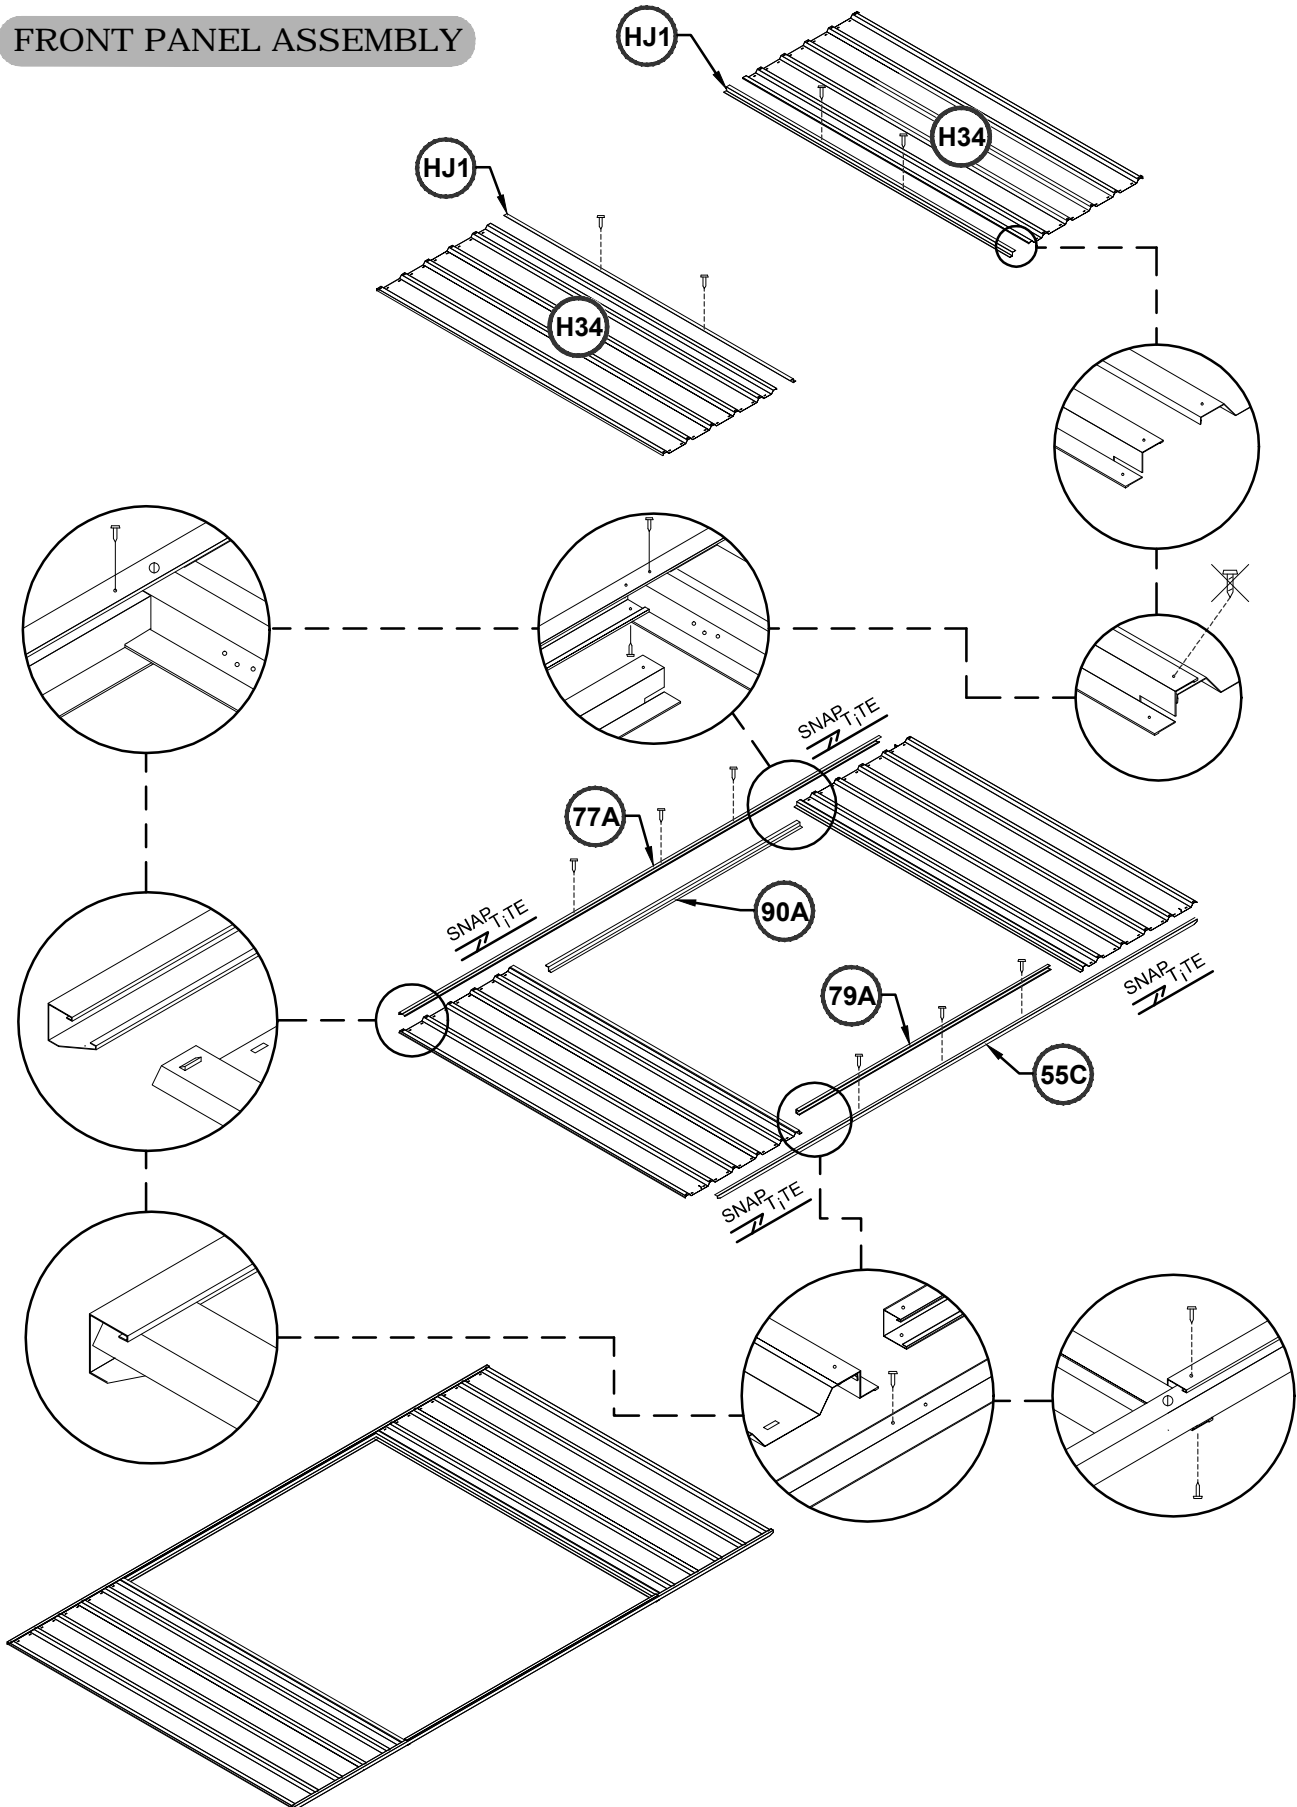

DOOR PANEL ASSEMBLY

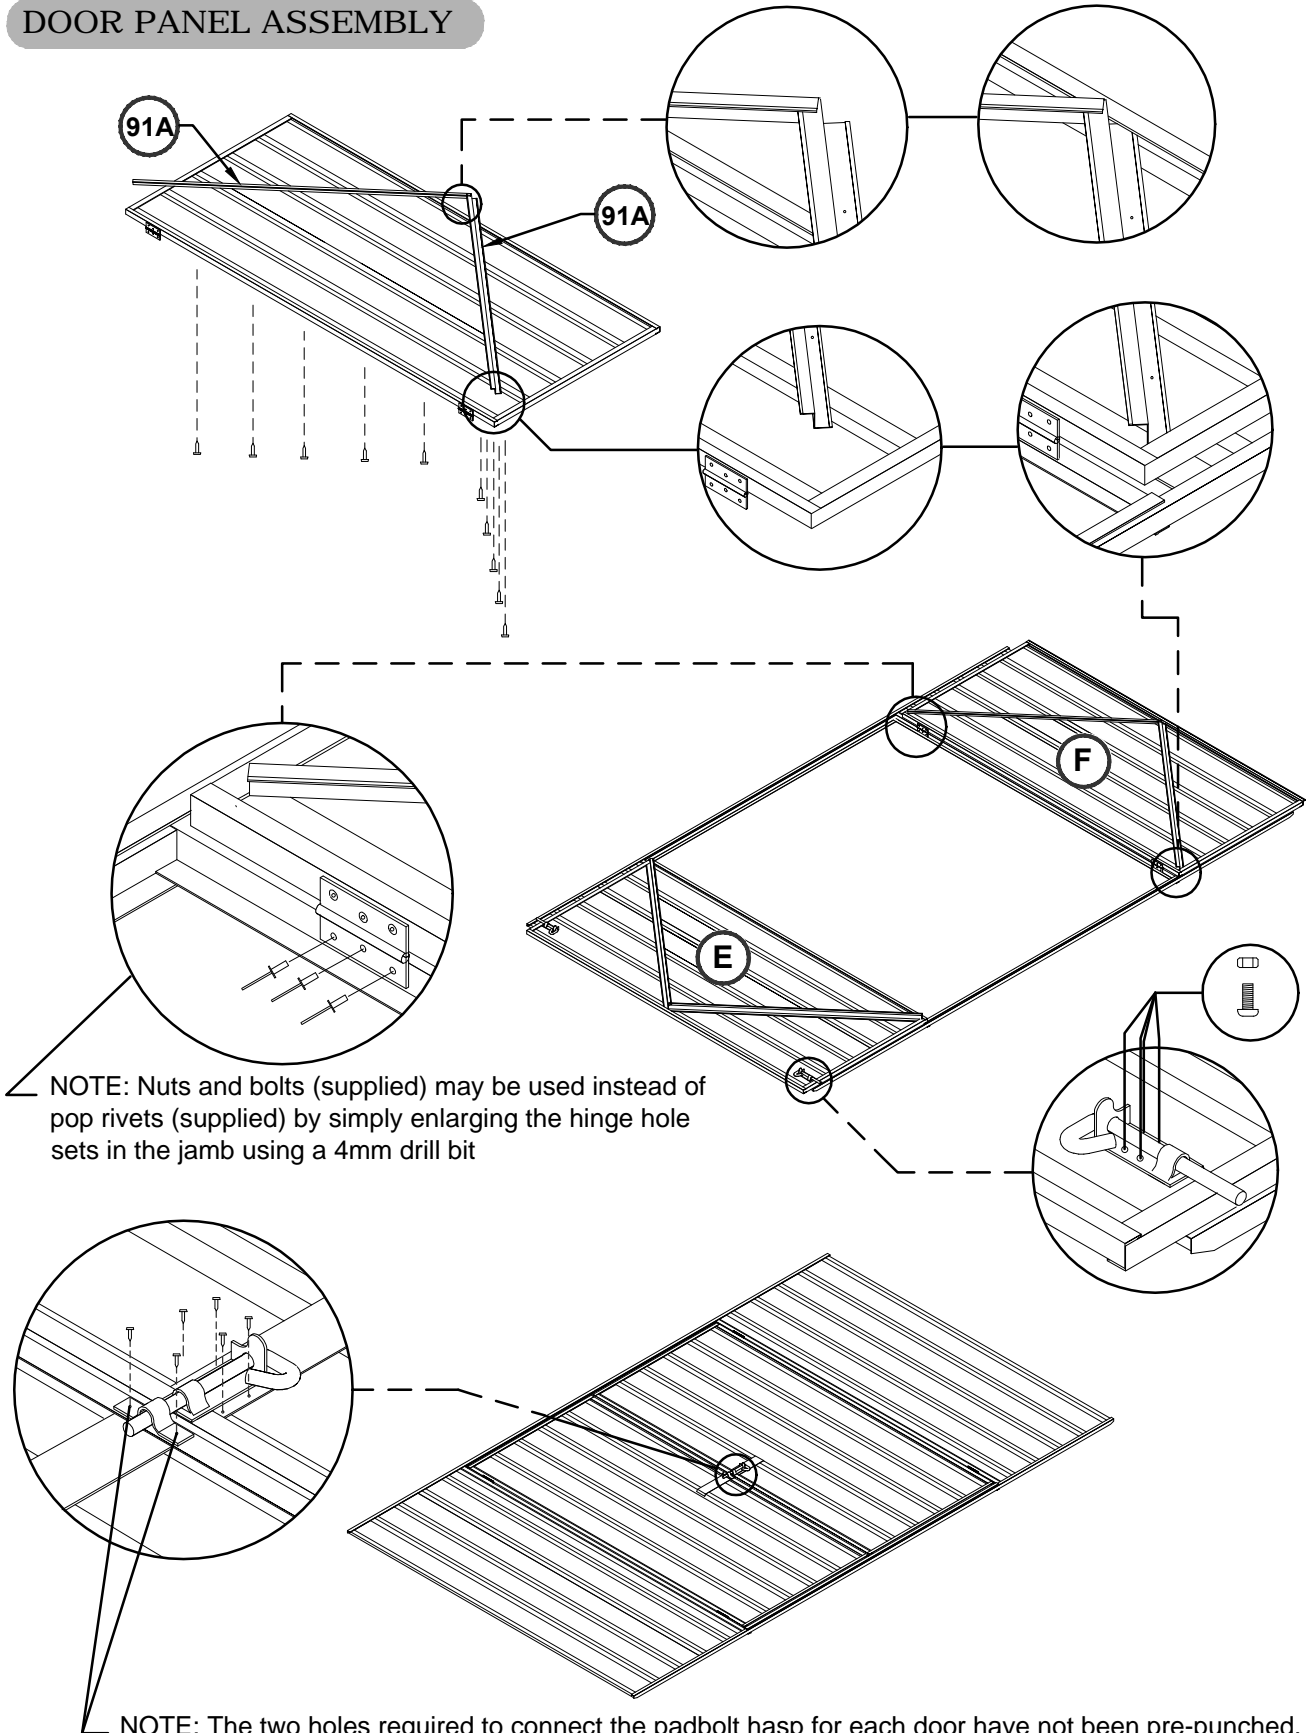


NOTE: Nuts and bolts (supplied) may be used instead of pop rivets (supplied) by simply enlarging the hinge hole sets in the jamb using a 4mm drill bit

NOTE: The two holes required to connect the padbolt hasp for each door have not been pre-punched, to allow for proper alignment. position each hasp centrally over the padbolt shaft, and drill 3mm holes and secure with screws


PANEL CONSTRUCTION

NOTE: Take care to ensure that both front and rear wall panels are not positioned upside down. The top channel of each panel is pre-punched for attaching roof sheets, the bottom channels are not.

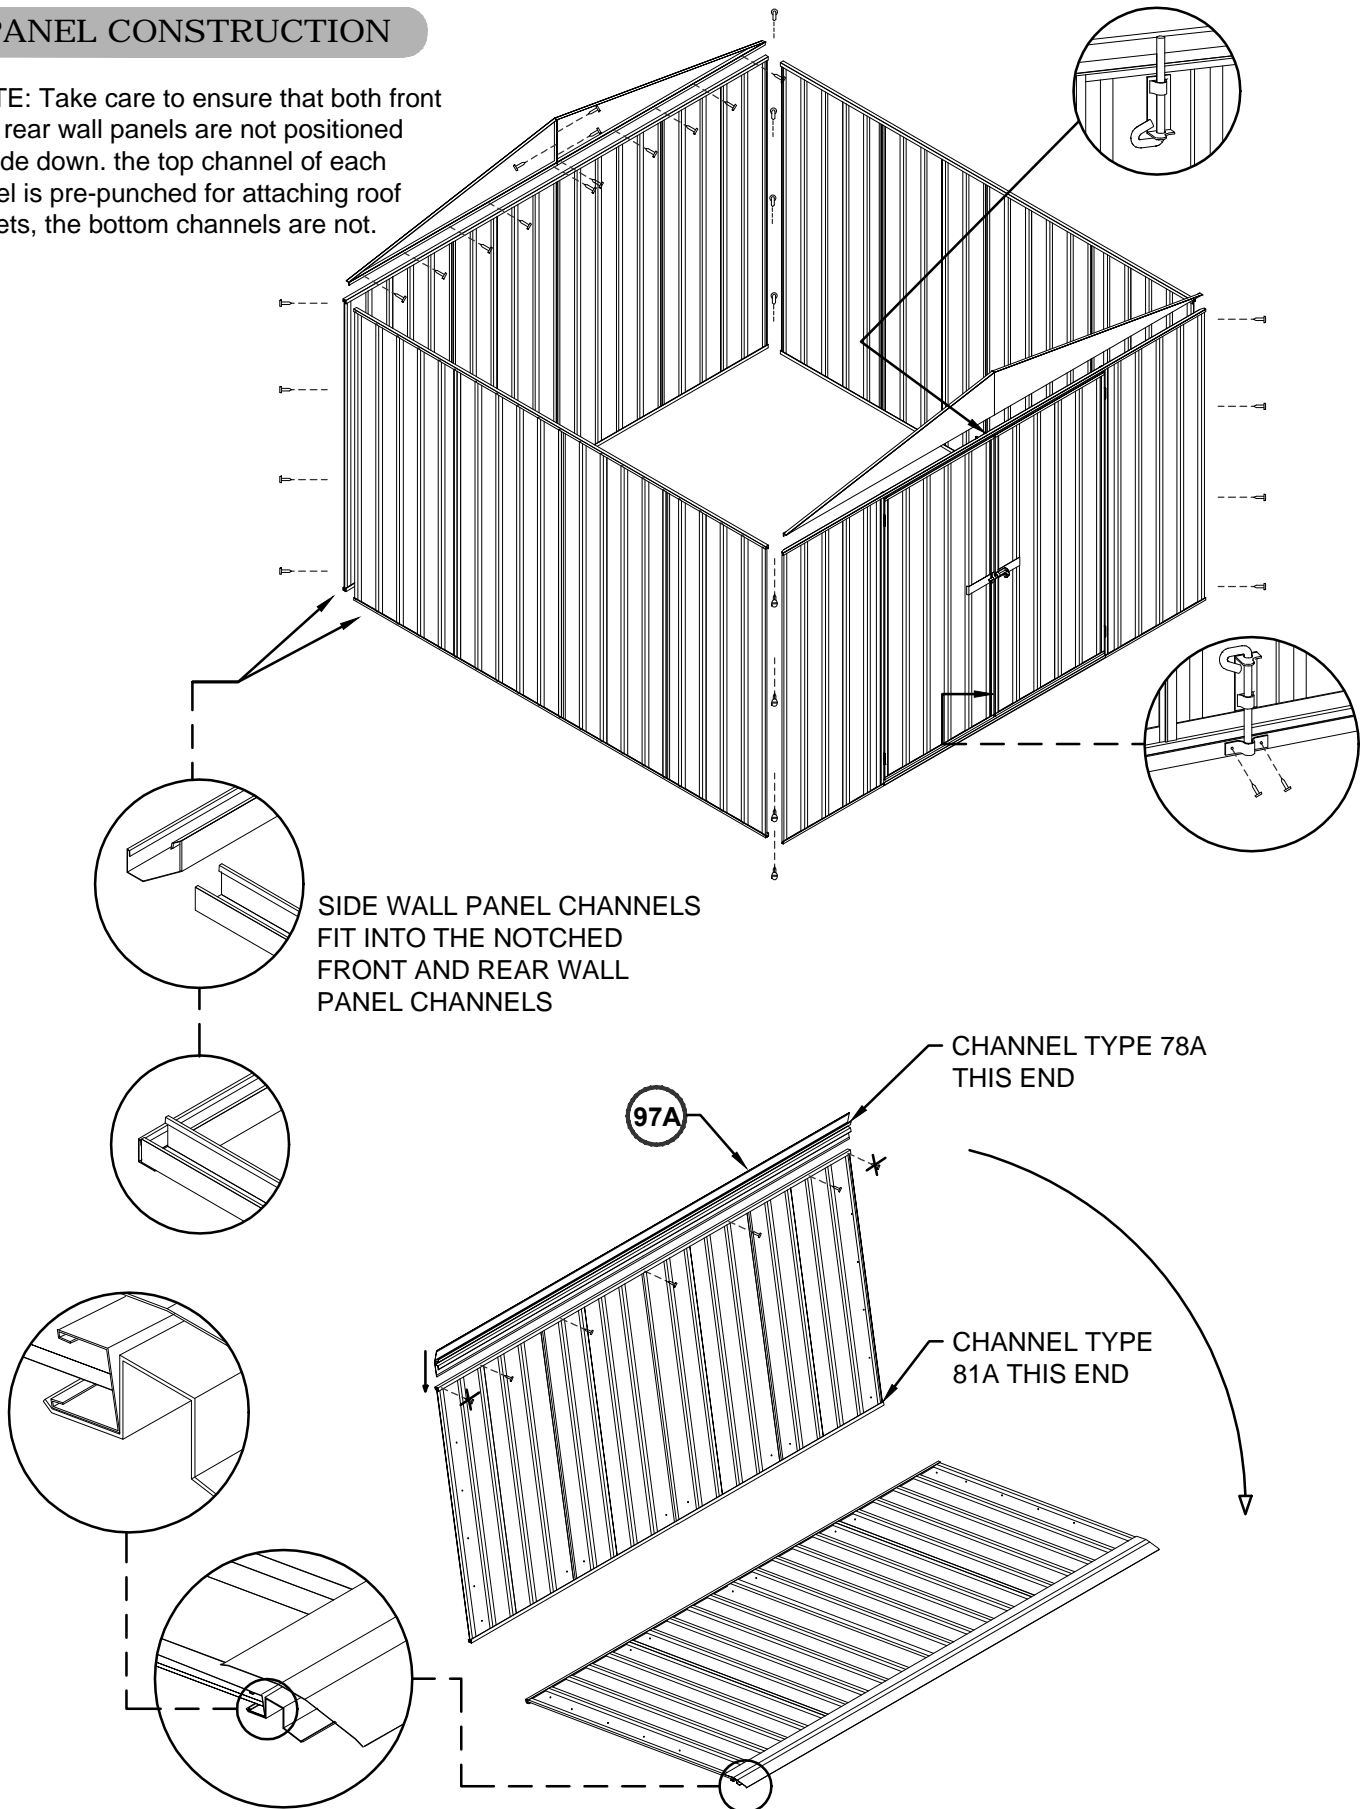


ROOF CONSTRUCTION



OUTSIDE VIEW

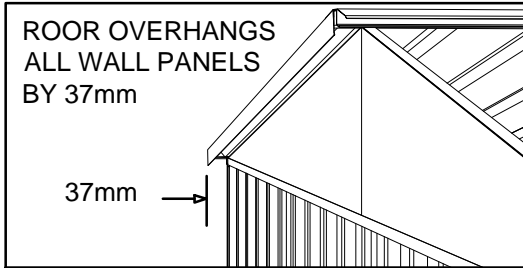

INSIDE VIEW

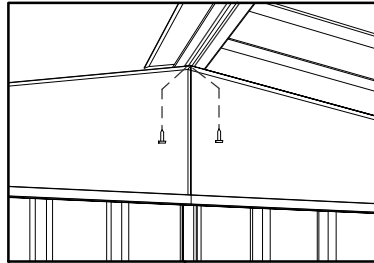



SECURE RIDGE BEAM TO
GABLE SECTIONS WITH
TWO SCREWS AT EACH
END. SECURE EACH ROOF
PANEL WITH ONE SCREW
IN EACH CORNER ONLY
AT THIS STAGE

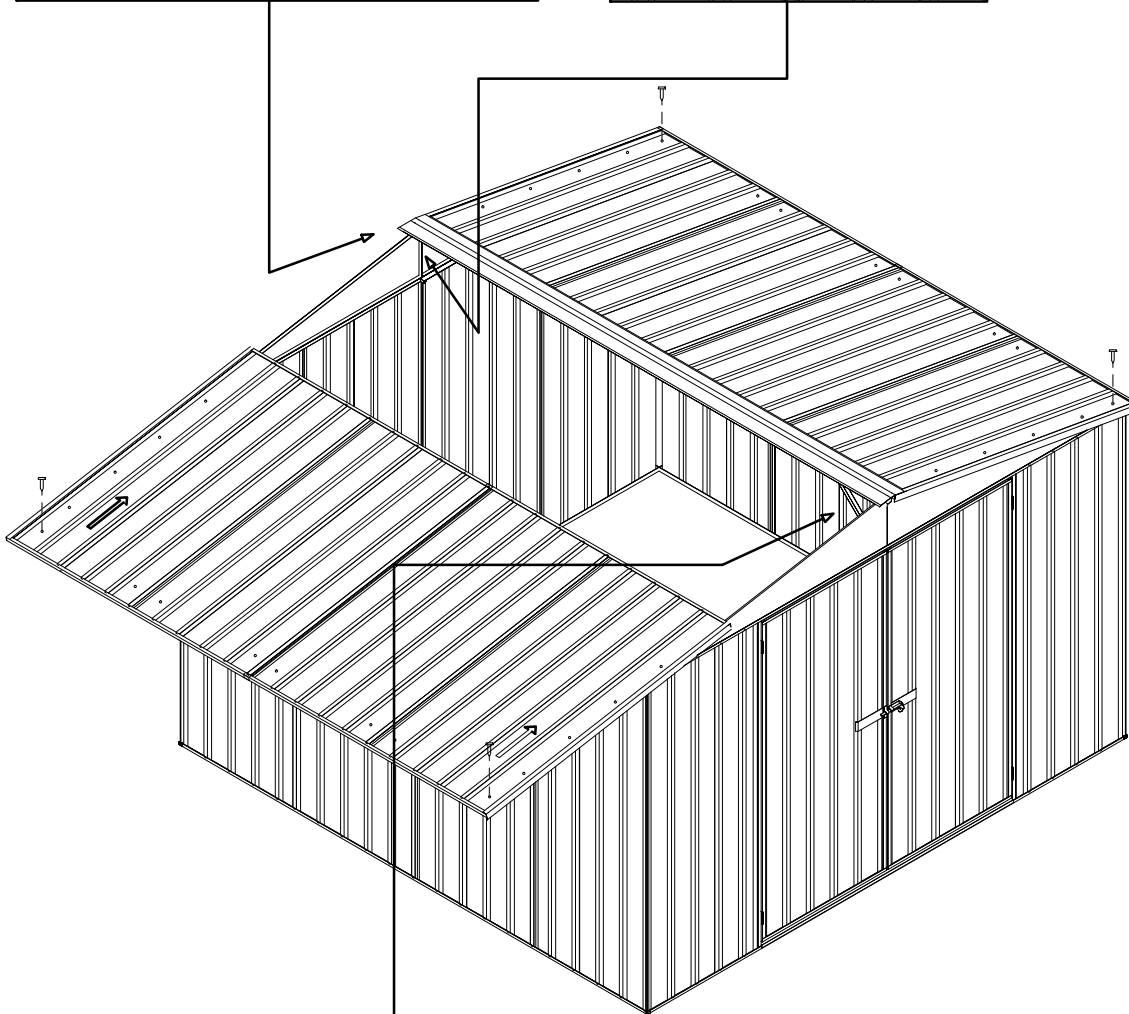


INSIDE VIEW

AFTER THE ROOF PANELS
HAVE BEEN SECURED, FIT
TWO GABLE BRACES (13A)
FROM THE TOP WALL
CHANNEL TO THE UNDERSIDE
OF THE RIDGE BEAM AT 45
DEGREES AS SHOWN TO
BOTH GABLE WALLS.


FINAL CONSTRUCTION

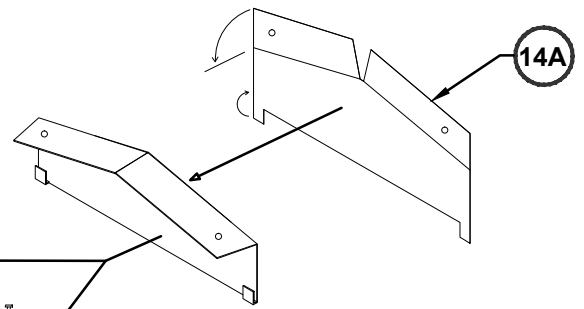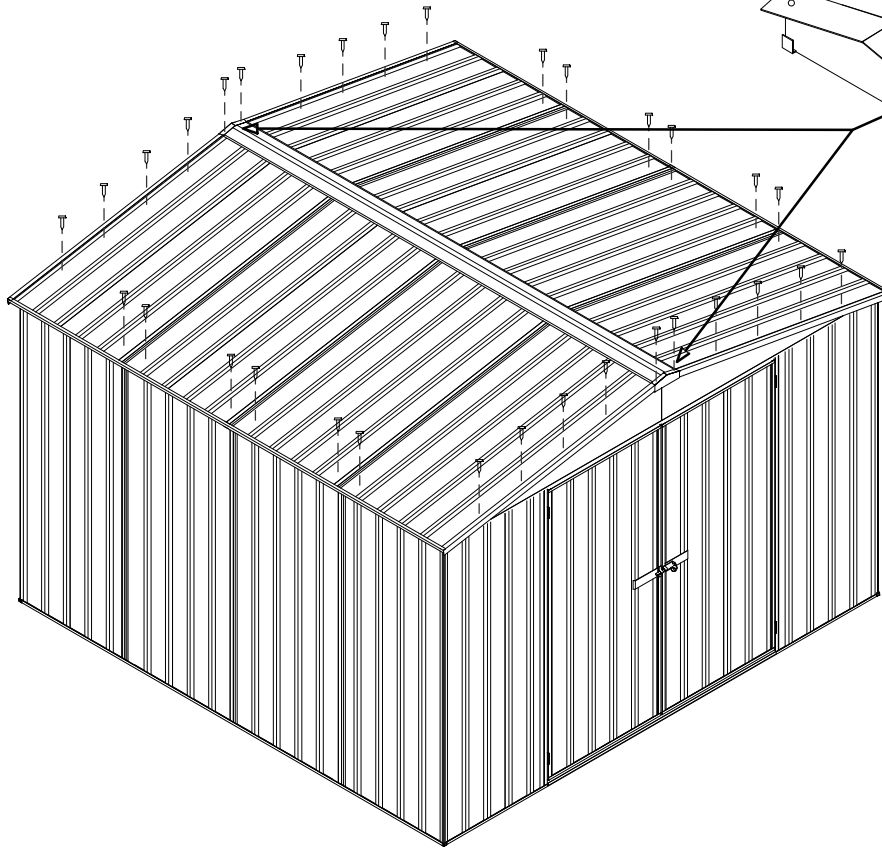


BEND THE TOP AND BOTTOM FLANGES AS SHOWN, THEN HOOK THE BOTTOM FLANGES UNDER THE TOP CHANNEL AND SCREW THE TOP FLANGES FOR BOTH AS SHOWN GABLE CAPS

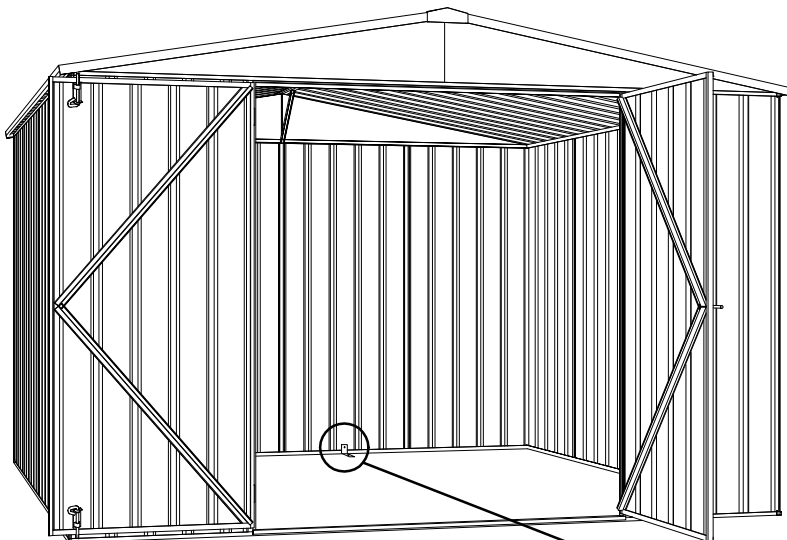

ANCHORING OF SHED



- EACH ANCHOR CONSISTS OF ONE NUT, BOLT, DYNABOLT AND STEEL ANGLE
- DRILL A 10mm HOLE INTO THE WALL SHEET
- DRILL A 10mm HOLE INTO THE CONCRETE

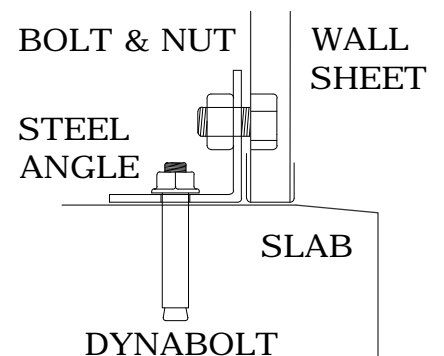



PRODUCT WARRANTY

Congratulations on your purchase of an ABSCO Product.

ABSCO SHEDS are made using high quality Bluescope™ Australian made Zinalume™ or Colorbond Steel™.

We are pleased to advise we warrant that this steel will not rust, crack, flake peel or blister for **20 years** from date of purchase.

This warranty does not apply to surface deterioration of panels caused by 'Swarf' (Tiny particles of steel debris left from cutting, grinding or drilling operations) that has not been removed after building construction, or as a result of contact with damp soil, chemicals, fertilisers or other corrosive substances.

This warranty covers any shed used for normal domestic use and installed in accordance with the installation instructions. The warranty does NOT cover Damage caused by storms, wind, rain snow or poor foundations.

This warranty does NOT cover ABSCO products installed in severe coastal, industrial or other highly corrosive environments. The warranty does not cover fasteners (screws, nuts, bolts, rivets, hasps or bolts).

The warranty is limited to replacement and delivery of components and does not include any labour or installation costs.

The warranty applies to the exclusion of all other representations, guarantees or warranties express or implied, our goods come with guarantees that cannot be excluded under the Australian consumer law and is not transferable

For further information go to <http://www.consumerlaw.gov.au>.

Please retain a proof of purchase (sales docket or invoice) or register your warranty within 30 days of purchase here: www.absco.com.au/register_warranty.php

In the unlikely event a warranty claim is made it must be supported by photographic evidence together with proof of purchase documentation (or on-line registration of purchase) and forwarded to ABSCO INDUSTRIES, PO BOX 119 ACACIA RIDGE QLD AUSTRALIA 4110

Issued January 2011



ABSCO STEEL BUILDINGS- STORAGE GUIDELINES

ABSCO steel buildings include garden sheds, storage units, aviaries, garages and carports. ABSCO steel buildings are designed to be weatherproof for normal weather conditions. In the event of extreme weather conditions such as heavy rain, combined with high wind gusts, the ridge capping, sheeting joins, screw fixings etc., may exhibit minor deformations which may allow some water entry. These areas should be checked regularly to ensure that maximum strength and protection is maintained.

Other weather conditions such as extreme heat and extreme cold, moist or dry air can influence the effects of concrete floor moisture and/or condensation on the underside of the roof sheets.

ABSCO SHEDS and storage units are primarily used for storage of garden equipment such as lawnmowers, wheelbarrows, garden tools etc. Storage items that might be adversely affected by any of the above conditions may require additional protection such as being sealed or covered by plastic sheets and/or stacked above the concrete floor on timber slats.

Waterproof sealants may be used to offer further protection where required around joins and screw fixings, as can rubber door seals and other products which are available from most hardware outlets.

Placement of waterproof sealants (silicone) between the base of the shed and concrete slab is not recommended, as this process can have a reverse effect, preventing excess water from escaping, resulting with water accumulating and being trapped inside the shed.

Absco accepts no responsibility for water entry, floor moisture, condensation or the condition of the Contents inside your Absco steel building arising from any of the pre-mentioned weather conditions.