


LITOELASTIC



2 PART EPOXY-POLYURETHANE ADHESIVE

To bond most surfacing materials onto most substrates.
High-performance reactive adhesive, two-part epoxy-polyurethane for the adhesion of ceramic tiles, mosaics, natural and reconstituted stone, glass tile and others.



Fields of application

- Suitable for indoor and outdoor applications on floor and wall even in severe usage conditions.
- Multi-purpose adhesive suitable for bonding most surfacing materials even on non-traditional substrates such as wood, metal, fibreglass, PVC, linoleum
- Product featuring high elasticity and excellent water resistance.
- Suitable for simultaneous waterproofing and laying ceramic tiles or mosaics in shower or wet interior environments.

LITOKOL®

HI-PERFORMANCE BUILDING PRODUCTS

Made In Italy



the
Tile Doctor

EXCLUSIVE DISTRIBUTOR FOR USA
Tile Doctor
www.TileDoctor.com
877-TileDoc (845-3362)

Intended use

Suitable for bonding all types of porcelain - ceramic tiles, thin porcelain slabs with and without reinforcement, mosaics, glass tile and glass mosaic, most kinds of natural stones (including unstable types such as green marble, slate and Serena sandstone), resin agglomerates, Engineered stones, thin and flexible stone plates with polyester or fiberglass backing, indoors and outdoors on flooring and walls on traditional supports or elastic and vibrating ones such as wood panels, metal surfaces and lightened panels.

Suitable for applications subject to severe operating conditions such as swimming pools, floors subject to heavy traffic, tiling exposed to high temperature fluctuation.



For the bonding of:

Porcelain and Ceramic Tiles and Mosaics

Glass Mosaic and Glass Tiles

Reinforced Prefabricated Slab,


Natural Stones

Resin Agglomerates

Large Porcelain / Ceramic tiles and Thin Slabs, including large formats

Resin agglomerates Slabs and Engineered Stones

Unstable Natural Stones types due to moisture warpage or subject to staining

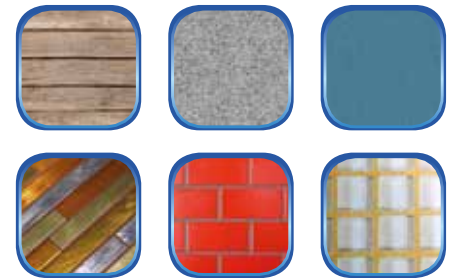

Substrates and field of application

On wood kitchen tops and back splash

On metallic surfaces for the production of prefabricated bathrooms

On top of existing ceramic tiles or marble chip tiles

On heated flooring

On outdoor façades / exterior cladding

On extruded polystyrene panels used in saunas

In hammam and wellness centers

At floor-level ducts and shower drains

In most types of swimming pools

In swimming pools waterproofed surfaces with Elastocem, Coverflex or Aquamaster

On fiberglass baths and tubs

Suitable supports

Cement screeds; Litocem-based screeds; sulphate-based screeds (anhydrite); smoothing made with Litoliv S40 Eco, Litoliv Extra 15, Litoliv Express, Litoplan Rapid, Litoplan Smart; in-situ or precast concrete; supports waterproofed with Elastocem, Coverflex or Aquamaster; cement plasters; lime/cement plasters; gypsum/anhydrite-based plaster; wood or metal panels; fibreglass; PVC; linoleum; parquets; lightened panels.

