


Before you order our kit or begin construction, obtain a building permit. If additional documents are required contact Richard@barnkits.com.

## 12' x 8' ASPEN ELEVATION

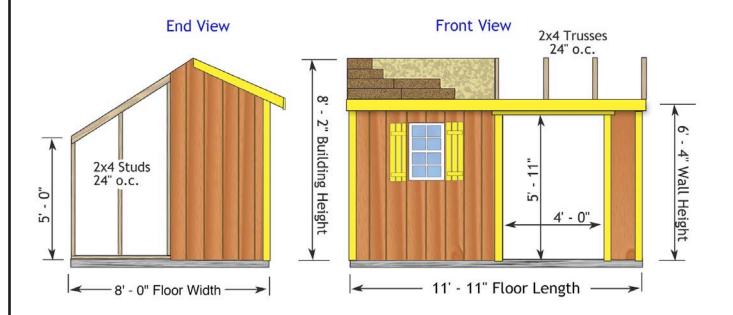

**Foundation:** By owner

**Wall Framing:** Constructed from 2x4 precut wall studs spaced 24" on center between top and bottom plates.

**Siding:** Louisianna-Pacific '*Smart Panel*' primed 8" o.c. groove with 50 year warranty, 5 year labor replacement

**Roof System:** 2x4 trusses spaced 24" on center, 7/16" OSB roof sheathing. *Shingles by owner*.

**Exterior Trim:** White pine trim for corners, door, gable trim and front and back fascia.

**Hardware:** Nails for all framing, metal hurricane hangers for trusses.

