

A whole home power solution during an outage. Safely connect a generator to your home in the case of an emergency without the worry of deadly back feeding of the utility lines. The EZ- Connect can support whole home generators so you won't miss a beat while the power is down.

### Operating Range:

Utility: Up to 200 amps

Generator: 20 amps up to 200 amps at 240 volts

### Switch Certification:

UL Listed disconnect switch

### Enclosure Plug Options:

14-50 straight blade or hardwire

### Generator Plug Options:

L14-20, L14-30, 14-50 straight blade, or hardwire

### Enclosure:

GE Lexan 5V Fire Rating

NEMA 4X Rating

Size: 3.5"x5.0"x2.25"

### Models:

EZC-22: 30 amp generator plug

EZC-23: 50 amp generator plug


EZC-25: Hardwired option

### Options:

75kA surge protection

Cords to connect into a portable generator

Breaker to become service entrance rated

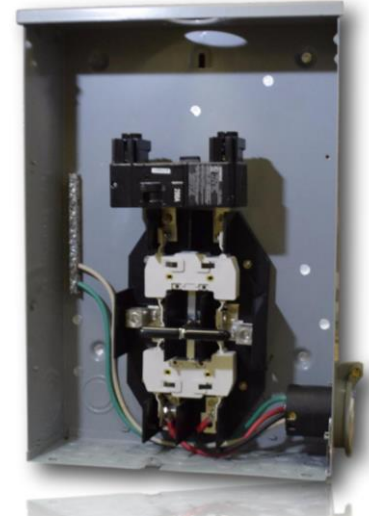

### Standard Features

- NEMA 3R enclosure
- UL Listed
- Double throw
- 240 VAC
- Up to 200 amps

### Additional Products

- Dock Safe-Safety indicator
- Dock Out-Safety switch
- GenerLink-Transfer switch
- NE Meter-Sub meter
- Surge Safe-Surge protection



Lawrenceville, GA 30044

Phone: 800-886-3837 Fax: 888-886-3837

[www.globalpowerproducts.com](http://www.globalpowerproducts.com)