

# Choosing the right size door is a breeze.

Andersen® storm doors conveniently attach to the exterior trim of an existing entry door. Find the door size you need by following these easy steps.

**1 Height**  
Measure for height (H) from the sill to the underside of the exterior trim at the top of the door.

H \_\_\_\_\_  
Record your door height.


**2 Width**  
Measure the width at the top (W1), center (W2) and bottom (W3) of the door opening. Use the shortest measurement when ordering if they vary.

W1 \_\_\_\_\_ W2 \_\_\_\_\_ W3 \_\_\_\_\_  
Record your door width.

For double doors, order 2 doors and a double door kit.

**3 Select Door Size**  
Use the sizing charts below to select a door size. Be sure to verify space requirements for the door you select.

Record the door size you need.

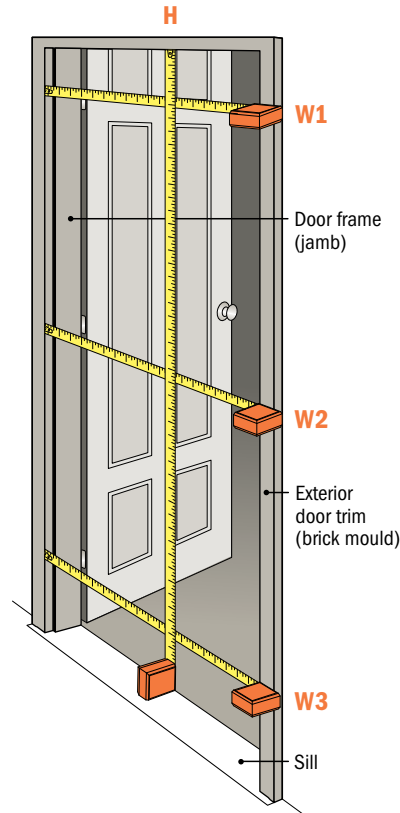

## Storm Door Size Charts

### Verify Rough Opening Requirements

Select a storm door and then verify the minimum space requirements on your existing door frame to make sure that your new storm door will fit.

#### DIMENSION A


- Minimum of 3/4" (1.91cm) for all storm doors; except the 75 Series, Forever® Series and the 4000 Series Fullview with Laminated Safety Glass Storm Door which require 1" (2.54cm).

#### DIMENSION B

- Minimum of 1" (2.54cm) required
- For openings with exterior door trim measurement (B) less than 1" but greater than 3/4", order optional narrow mount kit for proper installation.

#### DIMENSION C

- Minimum of 2 1/2" (6.35cm) required

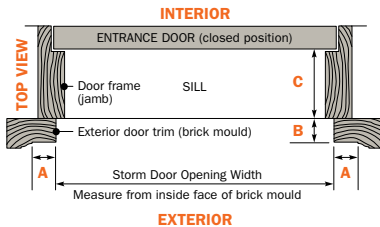

### Andersen® and EMCO® Doors

DOOR SIZE	ROUGH OPENING WIDTH RANGE	ROUGH OPENING HEIGHT RANGE
30"	29 7/8" to 30 3/8"	80" to 80 7/8" for all door sizes*
32"	31 7/8" to 32 3/8"	
33"	32 7/8" to 33 3/8"	
34"	33 7/8" to 34 3/8"	
36"	35 7/8" to 36 3/8"	

\*For opening widths outside these ranges, custom doors provide the best fit and installation. Alternatively, for openings up to 1" wider than those listed in the size chart above, an optional z-bar extender kit is available for purchase. 84" and 96" heights available on the Andersen 3000 Series Fullview with Clear Glass door, 36" White; 96" also available in Almond.

### Need a custom size?

DOOR SIZE	ROUGH OPENING WIDTH RANGE	ROUGH OPENING HEIGHT RANGE
Andersen	27 3/4" to 38 3/8"	72" to 84 7/8"
Andersen XL	27 3/4" to 42"	72" to 96"
EMCO	27 3/4" to 38 3/8"	75" to 84 7/8"
EMCO XL	38 1/2" to 42"	79" to 91"

To qualify for Andersen Custom XL sizing, only one of the following conditions must be met:

- Width of opening must exceed 38 3/8" or
- Height of opening must exceed 84 7/8"

Andersen Custom XL must be specified RH or LH. Ask an associate for details. For openings up to 1" wider than those listed, order optional Z-Bar Extender kit. Kits are also available for double-door installation for all models and colors.

### EMCO® Forever® Storm Doors

DOOR SIZE	ROUGH OPENING WIDTH RANGE	ROUGH OPENING HEIGHT RANGE
30"	30" to 30 3/8"	80" to 80 7/8" for all door sizes**
32"	32" to 32 3/8"	
36"	36" to 36 3/8"	

For more information visit [AndersenStormDoorsAtHomeDepot.com](http://AndersenStormDoorsAtHomeDepot.com)

"Andersen" is a registered trademark of Andersen Corporation. EMCO Enterprises, Inc. is a wholly owned subsidiary of Andersen Corporation. EMCO manufactures the storm doors in this brochure and supports the limited warranties. All other marks where denoted are trademarks of Andersen Corporation. "The Home Depot" and The Home Depot logos are trademarks of Homer TLC, Inc.