universal tubs

your doorway to independent bathing

Thank you for choosing Universal Tubs the nationwide manufacturer of walk-in tubs, bathtubs and bathroom fixtures exclusively made for the Home Depot.



























For toll-free information or to speak to a knowledgeable representative simply call **1-877-360-4454** or visit us online at **www.UniversalTubs.com** or email us at **info@UniversalTubs.com**.

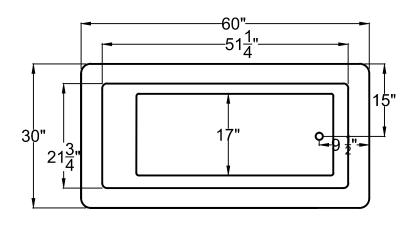

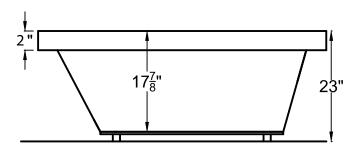

3060VN

30" x 60" x 23"

Installation: Drop-in cannot be under mounted

GENERAL SPECIFICATIONS:

Material Acrylic

Plumbed Weight: 160lbs / 73 kg Soaker Weight: 130 lbs / 59 kg Average Fill: 50 gal to above jet level

ELECTRICAL SPECIFICATIONS:

Required Electrical Air Bath or Whirlpool Whirlpool with Inline Heater Whirlpool and Air Service 110 Volt 1-15 amp GFCI 1-20amp GFCI 1-20 amp GFCI

Soaker

PACKAGES AND OPTIONS

Hydrotherapy Package	Package Contents	Part #
Soaker	Soaking bath - no jets, textured bottom	3060VNS
Whirlpool	Adjustable pointed-massage jets, 1-hp pump, textured bottom	3060VNH
Air Bath	Air jets, Air blower, Textured bottom	3060VNA
Whirlpool and Air	Adjustable pointed-massage jets, 1-hp pump, Air jets, Air blower, textured bottom	3060VND

OPTIONS

Colors Available - White Biscuit Quick Ship - reduces lead time - call for availability Inline Heater with Pump - Whirlpool or Whirlpool and Air Lift & Turn Drain Kit -Chrome, Brushed Nickel, White Color Match Jets.

IMPORTANT INFORMATION

- Before ordering or installing, please consider future access to equipment.
- Add bedding compound to fully level and support bottom of tub. notice.
- Tubs equipped with an air bath or a pre-leveled foam base are designed to rest on the floor without bedding compound, provided the floor is level.
- Please measure tub on-site before building tub decking.
- \bullet Jet, pump & blower locations are predetermined and cannot be changed.
- · Suction and control locations may vary.
- Specifications and configurations are subject to change without notice
- Measurements are +1/2" and are subject to change without notice.
- Measurements herein supersede all others published prior to publication date shown below.