

Choose this generator for light duty back-up during power outage or for power tools and DIY projects.

FUEL OPTION: *Powered By* **GASOLINE OR LPG FUEL**

DUAL FUEL



Flexible design lets you choose between **gasoline** or **liquid propane fuel**. The 120V RV outlet allows you to hook up to RV or trailer when camping or traveling.



9 HRS
@ 50% LOAD (GAS)
12 HRS
@ 50% LOAD (LP)
20 LB TANK

RUN TIME

1.2
GALLON
CAPACITY

FUEL TANK

94cc
OHV
4 STROKE
AIR COOLED

ENGINE

PROPANE FUEL HOSE WITH REGULATOR

INCLUDED


LIFETIME TECH SUPPORT
1 YEAR LIMITED WARRANTY
2 YEAR LIMITED EMISSION WARRANTY

WARRANTY

3.5
HORSE
POWER

HORSEPOWER

CONTROL PANEL FEATURES :

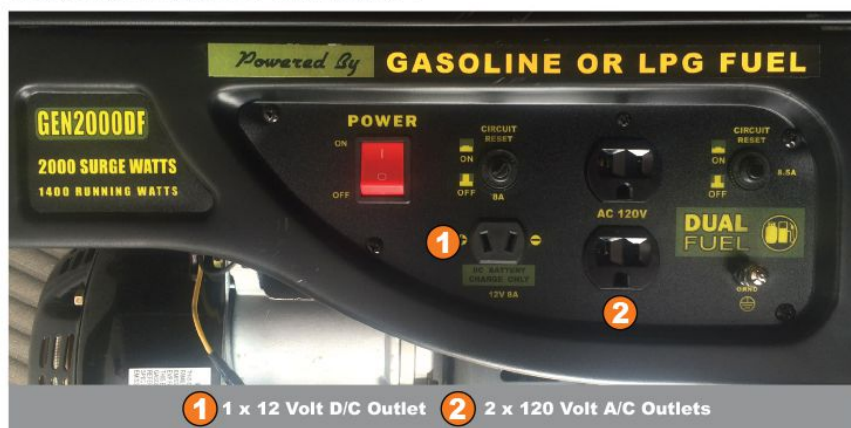

1 1 x 12 Volt D/C Outlet **2** 2 x 120 Volt A/C Outlets

This generator provides 1400 Running Watts (with 2000 Surge Watts)

Consider These Benefits When Using Propane Compared To Gasoline

Low Maintenance

Propane generators have no carburetors, no gummed up fuel systems or stale gas.

Environmentally Friendly

Propane burns cleaner than natural gas.

Infinite Fuel Shelf Life

Propane will not degrade, so you can keep several propane tanks on hand and store them for an unlimited amount of time.

Safety

Gasoline spills contaminate and leave stains and odors; propane will dissipate into the air.

Gas can and propane tank not included.



Wattage Consumption Guide

- Using the item chart provided, select the items you wish to power at the same time. Then insert the corresponding numbers into the Running (Rated) Watts and Surge (Starting) Watts columns below.
- Add up the Running (Rated) Watts of the items you wish to power and enter this number in the Total Running (Rated) Watts space.
- Select the one individual item with the highest number of additional Surge (Starting) Watts. Take this one number, and add it to your Total Running (Rated) Watts, then enter it in the Total Surge (Starting) Watts space.

| Tool or Appliance | Running (Rated) Watts | Surge (Starting) Watts |
|--------------------------|-----------------------|------------------------|
| 1. Refrigerator/Freezer | 700 | 2200 |
| 2. 1/2 HP Furnace Fan | 800 | 2350 |
| 3. Television | 500 | 0 |
| 4. Lights (8 x 75 watts) | 575 | 0 |
| 5. Microwave | 625 | 0 |

Highest Additional Surge Watts

Total Running (Rated) Watts = 3200 **2350**
 Total Running (Rated) Watts = + 3200
 Total Surge (Starting) Watts = **5550**

| YOUR POWER NEEDS | Running (Rated) Watts | Surge (Starting) Watts |
|-------------------|-----------------------|------------------------|
| Tool or Appliance | | |
| 1. | | |
| 2. | | |
| 3. | | |
| 4. | | |
| 5. | | |

Total Running (Rated) Watts =
 Total Running (Rated) Watts = +
 Total Surge (Starting) Watts =

With this example you need a generator that produces at least 3200 total running watts and 5550 total starting watts.

The information above is estimates only. For best results, check your tool or appliance for exact wattage requirements. The wattages listed are based on wattage requirements. For exact wattages, check the data plate or owner's manual on the item you wish to power.

* SURGE WATTS / RUNNING WATTS MAY BE REDUCED BY 10% WHEN USING PROPANE FUEL VS USING GASOLINE.