


Gazebo GZ3DXL Aluminium Composite Roof Panels

Assembly Instructions

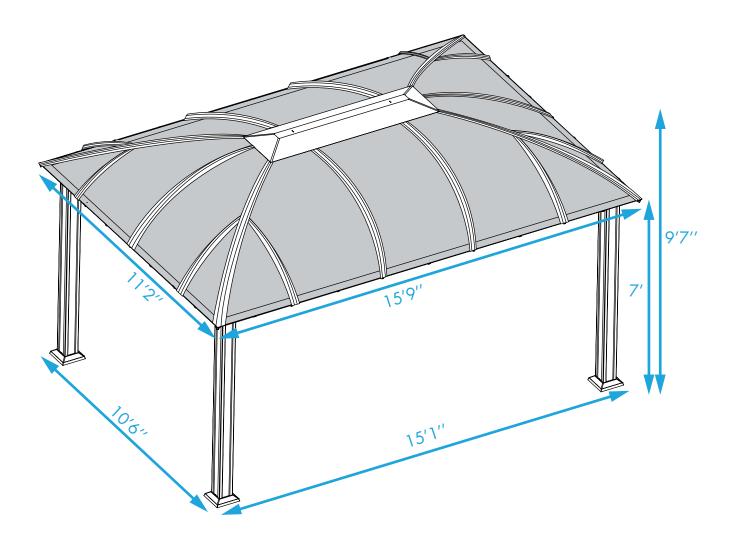

Paragon Group USA

Customer Service: (877) 782 4482 Email: cs-outdoors@paragongroupusa.com

Introduction



Thank you for purchasing the Gazebo GZ3DXL.

When properly assembled and maintained, this gazebo will provide many years of enjoyment!

These instructions include helpful hints and important information needed to safely assemble and properly maintain the gazebo. Please read these instructions completely before you begin.

Our patented gazebo has been designed for easy assembly. All steps can be completed by a team of <u>four people</u>. The assembly should take about two hours.

Before Starting Assembly:

CAREFULLY READ ALL THE INSTRUCTIONS BEFORE YOU BEGIN AND FOLLOW THE STEPS IN THE ORDER THEY ARE PRESENTED.

1. Make sure you have all the necessary parts:

Compare the contents of all cartons to the List of Parts. If any parts are missing or damaged, or you have any questions, please contact Customer service: (877)782 4482before beginning assembly.

2. Lay the parts out in separate staging areas:

The List of Parts has the corresponding step number referenced to each part. We recommend that while you go through the list, make staging areas for each step and place the parts necessary for each step in these areas. This will save you time and effort during assembly.

3. Select a Location:

When selecting a location for your gazebo, a flat level area is essential and if possible with proper water drainage and easy access to power and water, if neccessary.

Choose a sunny, level position away from overhanging trees and power lines and protected from the wind as much as possible. Locate underground pipes or cables before preparing the site or anchoring the gazebo.

Note: You may assemble the gazebo on a hard level surface and move it to its final location when finished. Make sure that there are no obstacles between the assembly area and the final position.

4. Prepare a Foundation:

After choosing a location, proper preparation of the site is recommended. The site must be level. If the site is not level, create a base slightly larger than the outside dimensions of the gazebo using a perimeter of two by fours filled with either soil, sod or gravel.

Make sure the base is square by measuring the diagonals from both directions and making sure they are equal. The gazebo is secured with pegs into holes cast with concrete.

If you decide to have a concrete base, it is best to contact a reliable contractor to make sure it is flat and level. Make sure you have checked with your local authorities regarding any required building permits.

- 5. Make sure you have the proper tools:
 - Tape Measure
- 2 Small Step Ladders
- Work GlovesSafety goggles

Spirit Level

- Wooden MalletScissors and knife
- Phillips Screwdriver
 - Liquid soap or WD40 LubricantHex Key (included)

NOTE: A cordless drill with Phillips head bit is highly recommended but not essential.

Safety Advice

- The gazebo must be positioned and fixed on a flat level surface.
- Dispose of all plastic bags safely. Keep them out of the reach of children.
- Keep children and pets away from the assembly area until the work is completed.
- Always wear shoes, gloves and safety goggles when working.
- Take special care not to touch overhead power lines with the aluminium profiles.
- Do not attempt to assemble the gazebo in windy or wet conditions.
- Do not position your gazebo in an area exposed to excessive wind.
- If using power tools or a ladder, always follow the manufacturers safety instructions.
- Hot items such as recently used grills, blowtorches etc. must not be stored in the gazebo.
- Make sure the gazebo complies with local building codes.


ATTENTION: DO NOT ATTEMPT TO ASSEMBLE THE GAZEBO ALONE!

Table of Contents

Introduction	2
Table of Contents	3
List of Parts	4
Step 1 Assembling the Corner Profiles	6
Step 2 Assembling the Rails	8
Step 3 Attaching the Rails to the Corner Profiles	10
Step 4 Securing the Gazebo to the ground	12
Step 5 Installing the Lower Roof gable Profiles	13
Step 6 Installing the Lower Horizontal Roof Profiles	16
Step 7 Installing the Roof Panels and	
Linner Roof Profiles	17

General Order of Assembly

- Step 1: Assembling the Corner profiles
- Step 2: Assembling the Rails
- Step 3: Attaching the Rails to the Corner Profiles
- Step 4: Securing the gazebo to the ground
- Step 5: Installing the Lower Roof Gable Profiles
- Step 6: Installing the Lower Horizontal Roof Profiles
- Step 7: Installing the Roof Panels and Upper Roof Profiles
- Step 8: Installing the Plastic Caps

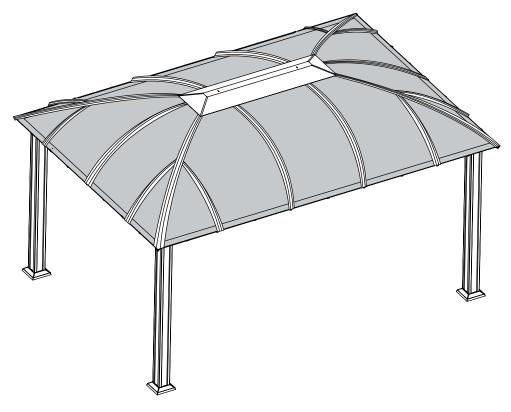



List of Parts



The gazebo is shipped in six cartons. These cartons are heavy. Be careful when lifting them. Wear proper safety gear including work shoes, gloves and goggles. The parts are identified by removable stickers. Place all the parts for each step in staging areas, checking that you have all parts as you go. If any parts are missing or damaged, contact customer service before beginning assembly:

Customer Service:(877) 782 4482 Email:cs-outdoors@paragongroupusa.com

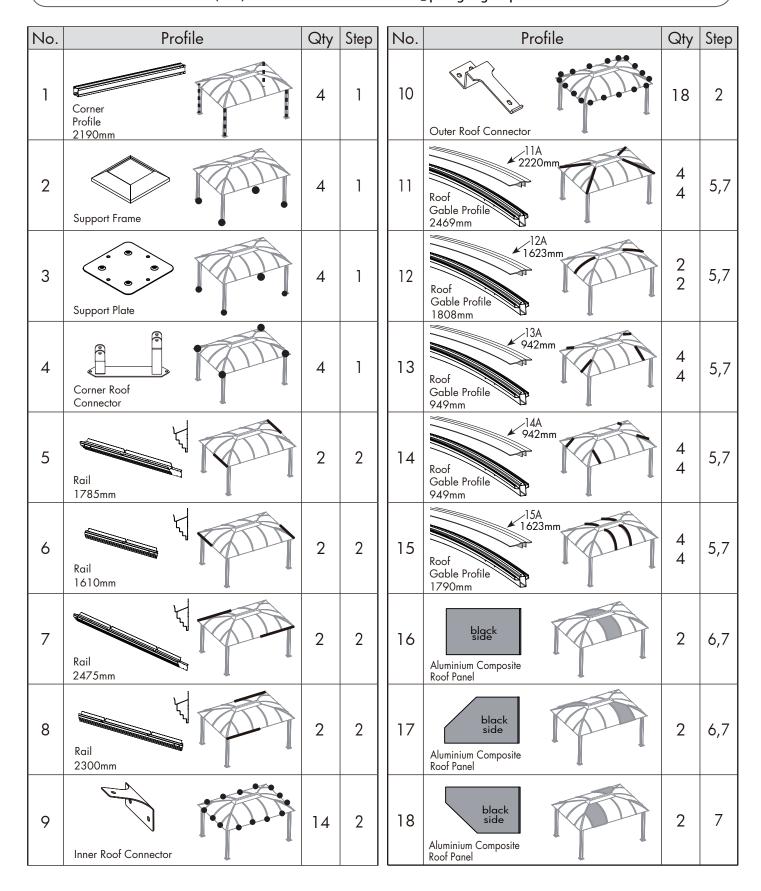

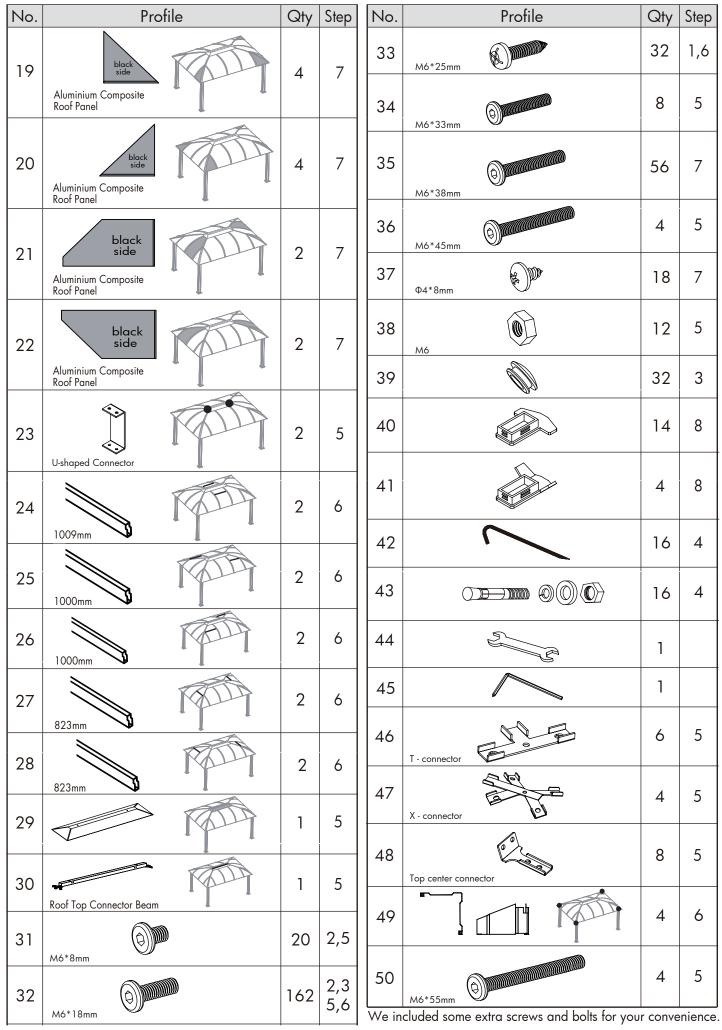


STEP 1 Assembling the Corner Profiles

Make sure the pieces are in the correct positions before assembling. Carefully follow the order of assembly to ensure an easy installation. Wear proper safety gear including work shoes, gloves and goggles.


Place all the parts on a level surface.

1.A



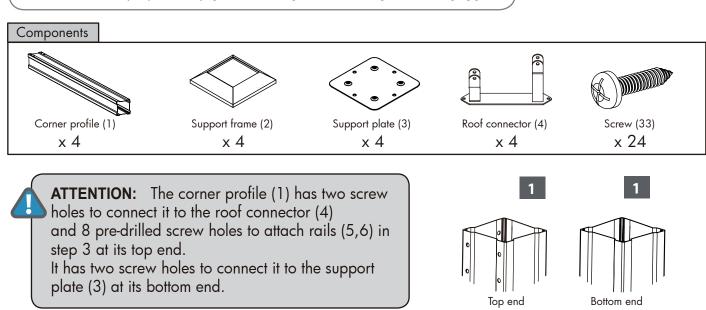

Place corner profiles (1) parallel to each other on the ground. Attach one roof connector (4) to each top end as shown and fasten with screws (33).

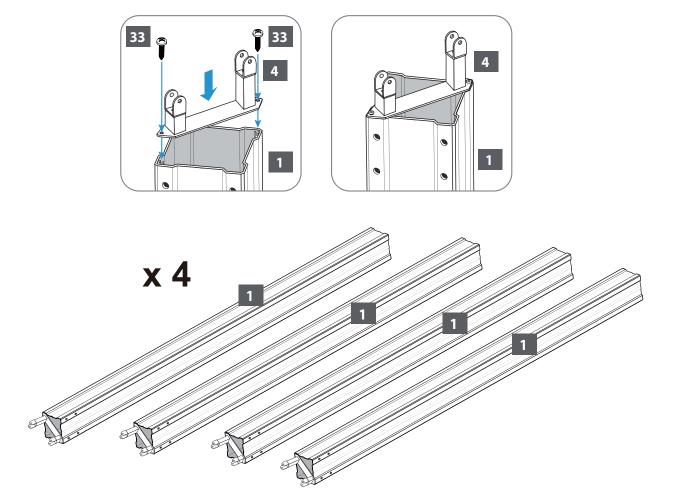





ATTENTION: Note: Do not need to assemble support frame (2) if you purchased the screen netting (GZ3DS or GZ3DXLS).

1.B

Slide support frames (2) over lower end of corner profiles (1). Attach support plates (3) to corner profiles as shown, using screws (33) for each plate.

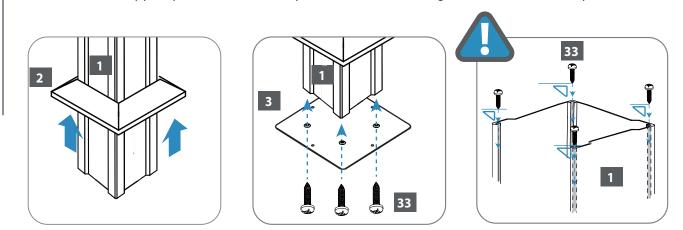


Leave support frames (2) about 10" over lower end of corner profiles (1) until step 4 (Securing the gazebo to the ground)

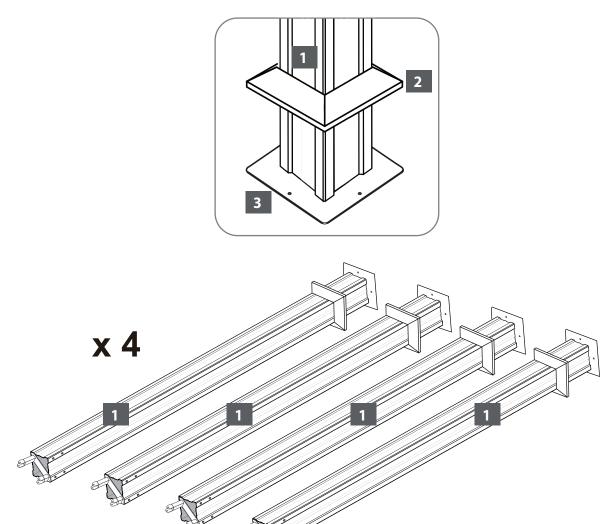


STEP 2 Assembling the Rails

NOTE: The Rails (5) have a preassembled connecting parts to be inserted into Rails (6).



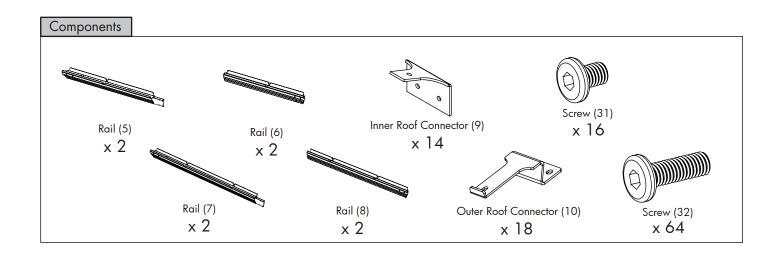



2.A Insert connecting part of rail (5) into blunt end of rail (6) as shown. Attach with four screws (31). Repeat to create four sets of rails.



2.B


Insert connecting part of rail(7) into blunt end of rail(8) as shown. Attach with four screws(31).




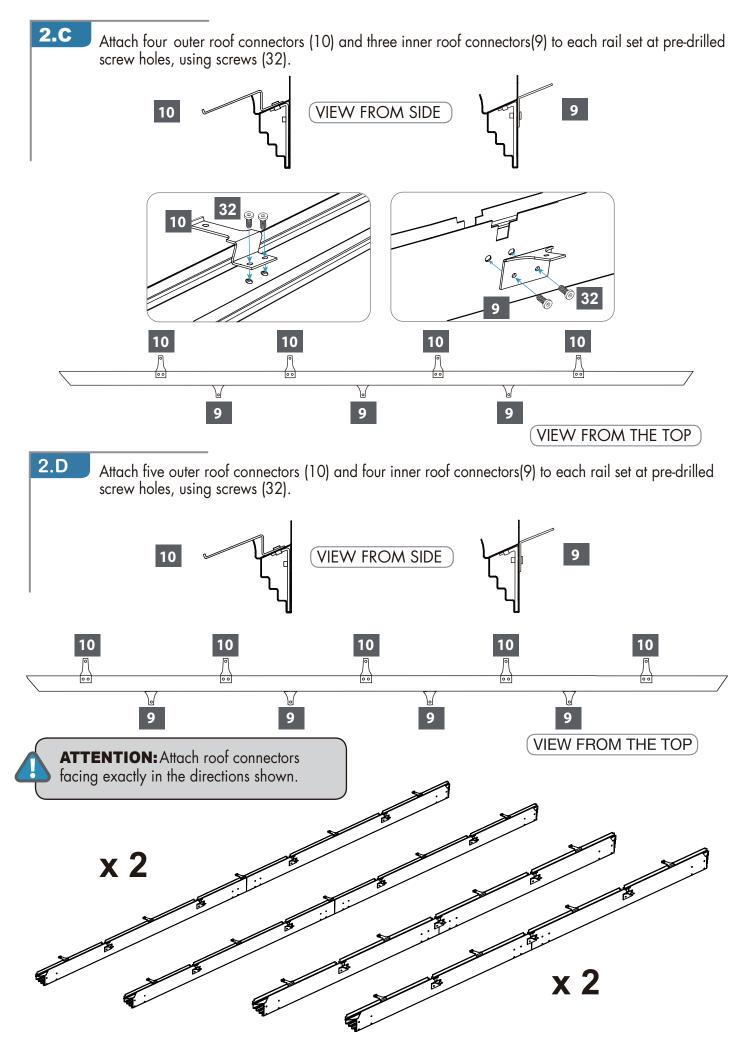



STEP 3 Attaching the Rails to the Corner Profiles
















Repeat step 3.A and 3.B to create two sets.

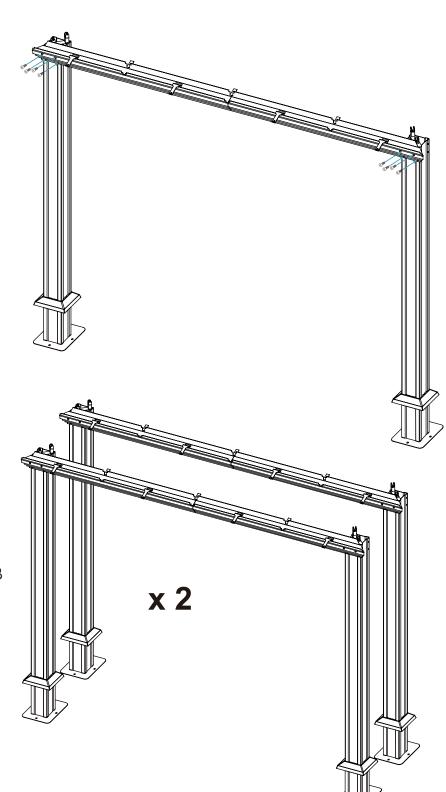

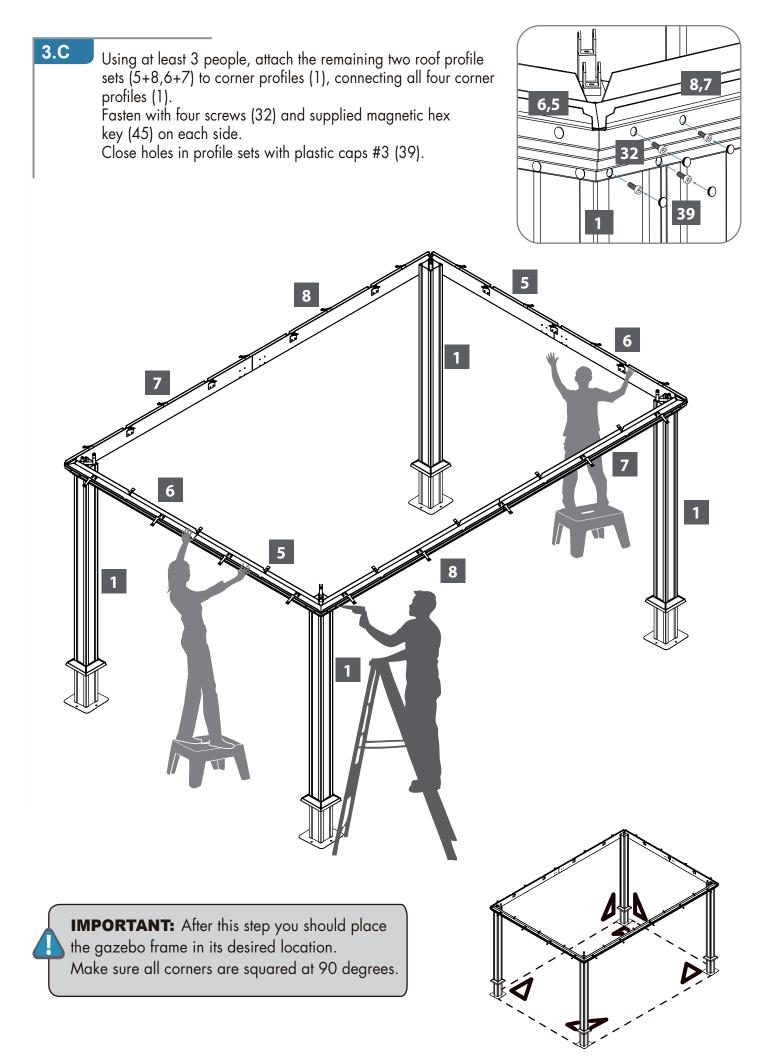


STEP 4 Securing the Gazebo to the Ground


Fasten the gazebo frame to the ground, using four spikes (42) for each



Lower support frames (2) to cover support plates (3).

support plate.






Optional Securing the Gazebo to a Concrete Floor or Wood Deck


Concrete Floor:


4.A


- 1. Using a concrete drill, drill holes into the concrete floor, corresponding to the holes in support plates (3).
- 2. Insert concrete bolts (43) into the holes and hammer into place, using a mallet.
- 3. Fasten concrete bolts with washers and nuts.



Components








Wood Bolts, washers x 16

NOT SUPPLIED to be purchased by user

Wood Deck:


- 1. Using an electric wood drill, drill holes into the wood floor, corresponding to the holes in support plates (2).
- 2. Insert wood screws with washers (not supplied) into the holes and fasten, using an electric screw driver.

PEA GRAVEL





STEP 5 Installing the Lower Roof Gable Profiles

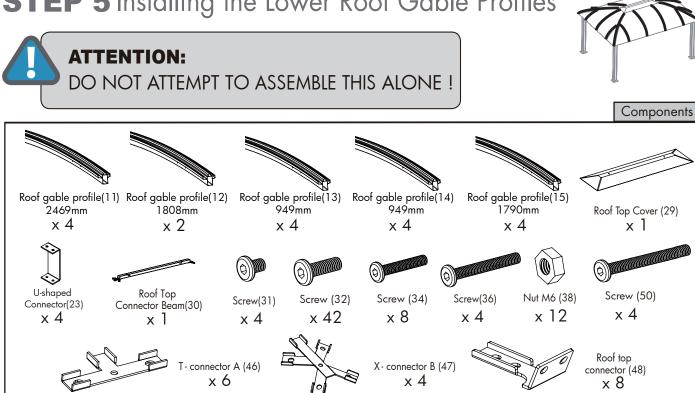


Using at least three people, install the roof gables (11,12) in the following order:


ATTENTION:

Roof Profiles, roof panel sand gables must be aligned properly during assembly to minimize any possibility of leaking.

VIEW FROM BELOW (from inside gazebo)

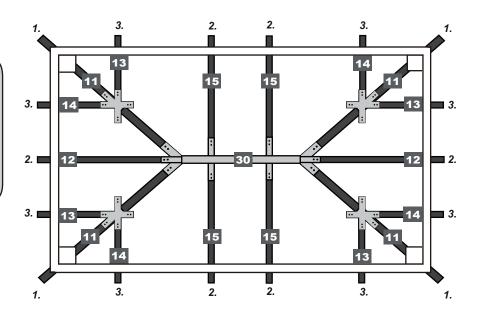


IMPORTANT: Make sure that the roof gable profiles (11,12) are installed exactly as shown so that the pre-drilled screw holes will align properly with screw holes on the roof panels.



Using screws (36) and nuts (38), connect roof gable profiles (9) to roof connectors (4) on top of corner profiles (1).

Using screws (32), connect roof gable profile (11) to roof top connector beam (30) as shown.

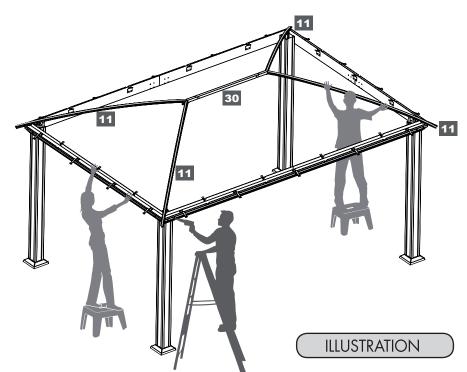

5.B Install roof gable profiles (15).

VIEWS FROM BELOW

5.A

11

36

0

1


30


VIEW FROM BELOW


38

6

Using screws (50) nuts (38) connect top center connector (48) to top connector beam(30). Using screws (32)connect profiles (15) to inner roof connector (9) on long roof profiles sets (7,8) and the other end to roof top center connector(48).

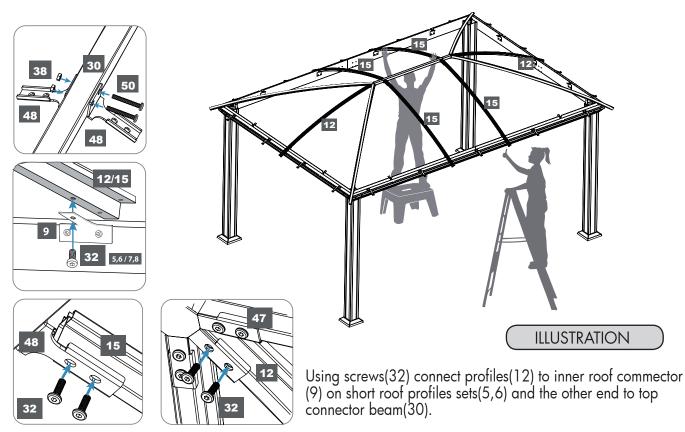


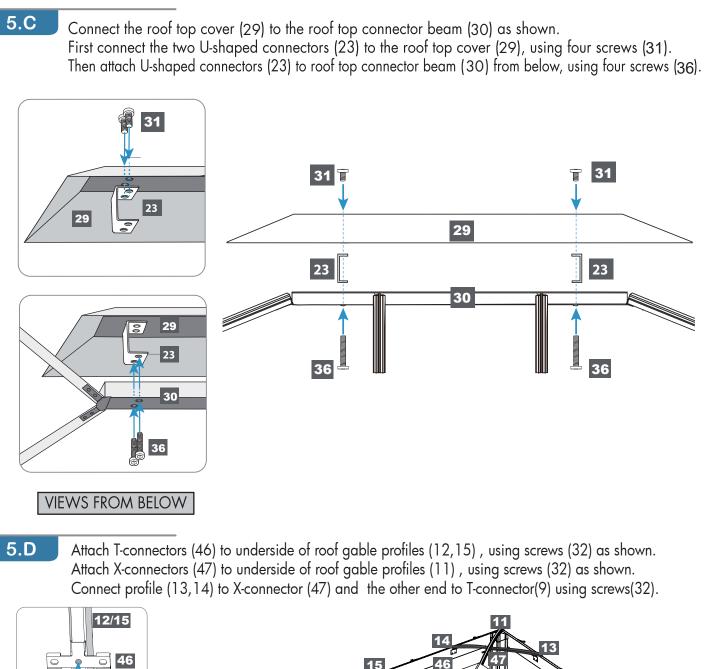

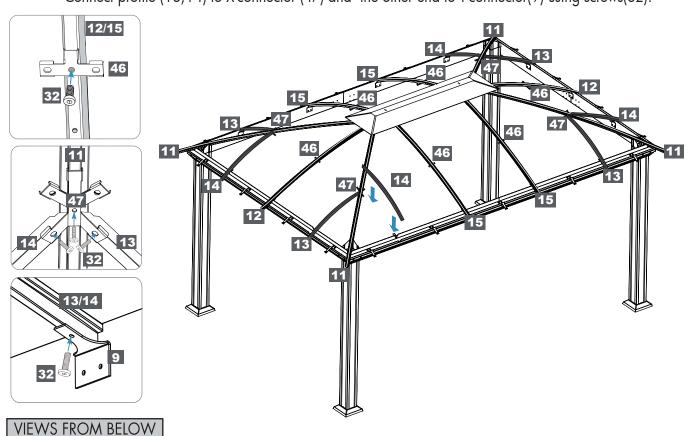


STEP 6 Installing the Horizontal Roof Profiles




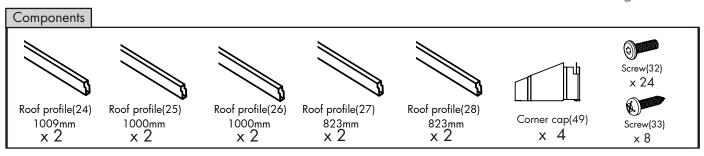


6.A


Attach roof gable profiles (24,25,26,27,28) toT-connectors A (46) and X-connectors B (47).










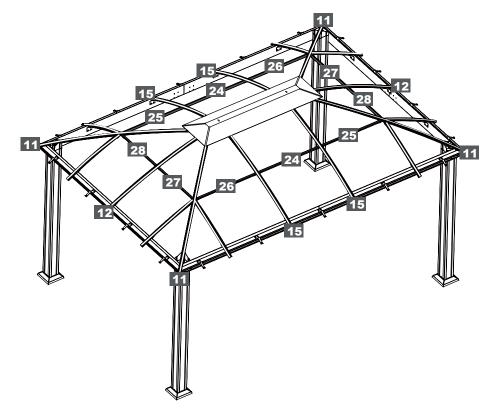


Fasten corner cap(49) to the top of the corner profile(1) from inside, and using screws(33).


STEP 7 Installing the Roof Panels and Upper Roof Profiles

IMPORTANT: Gently cut on the edge of the panels on both side with knife and remove protective plastic of roof panels. Place with black surface toward the sun facing out when installing.

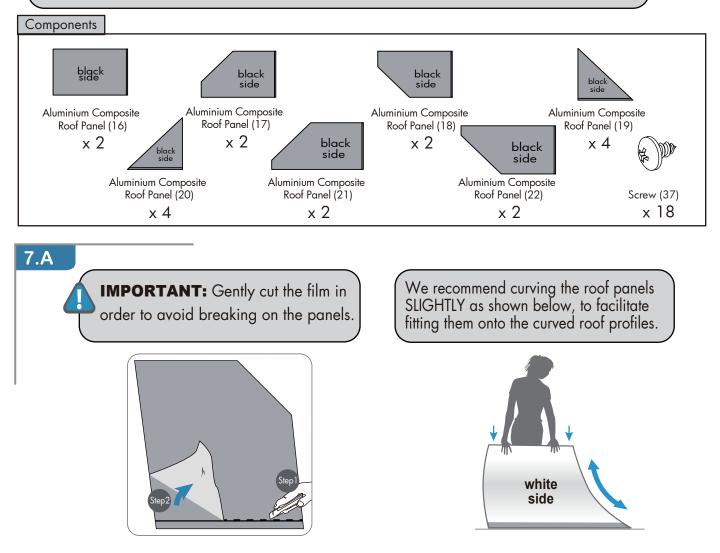


Fit roof panel (17) on top of roof profiles(13,15) as shown and fasten with one screw (37) from below to outer roof connector (10).




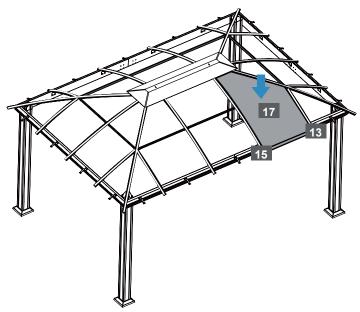


7.B

Fit roof panel (16) on top of roof profiles (15) as shown and fasten with one screw (37) to outer roof connector (10).

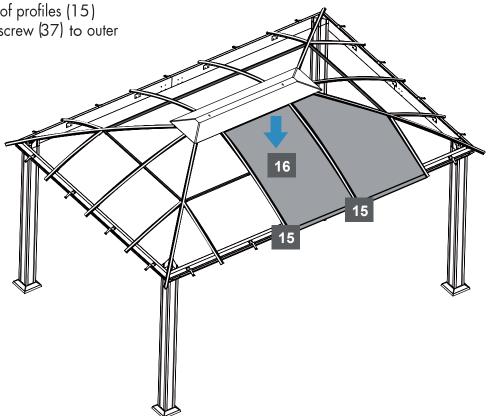

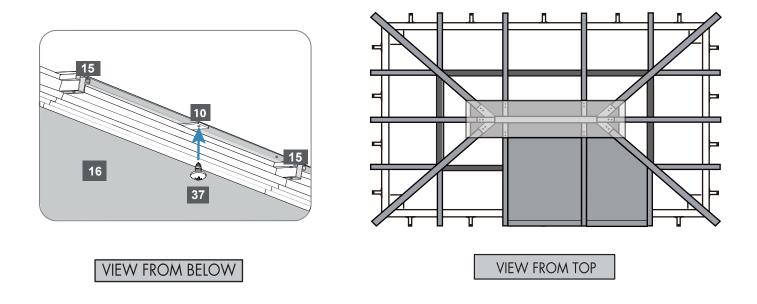


IMPORTANT: Make sure that the roof panels are installed exactly in the order shown, otherwise it will be difficult to place the top roof gable profiles.

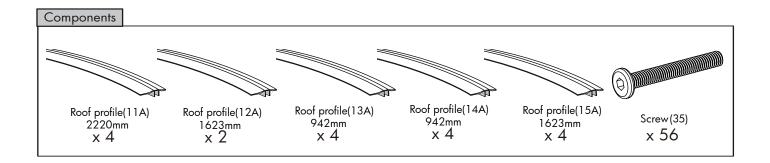


7.C

Place roof profile (15A) on top of roof profile (15) as shown and fasten with screws (35) from below (inside gazebo).

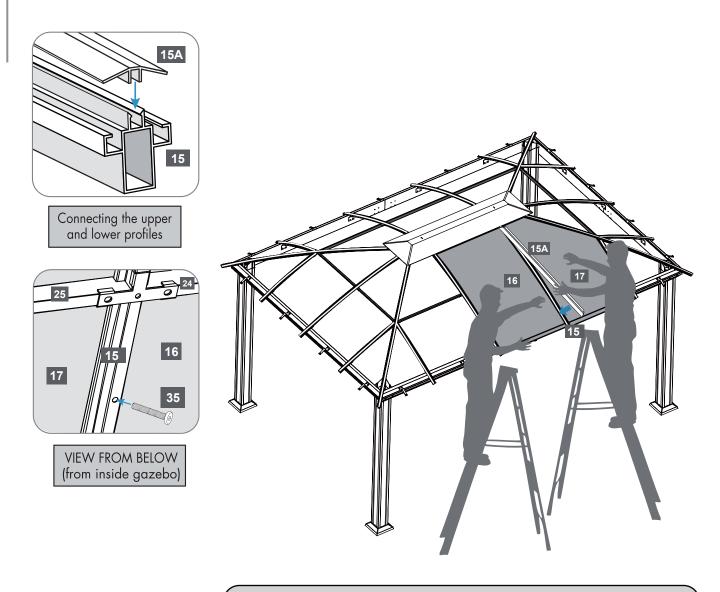


ATTENTION: Roof Profiles, roof panels and gables must be aligned properly during assembly to minimize any possibility of leaking.

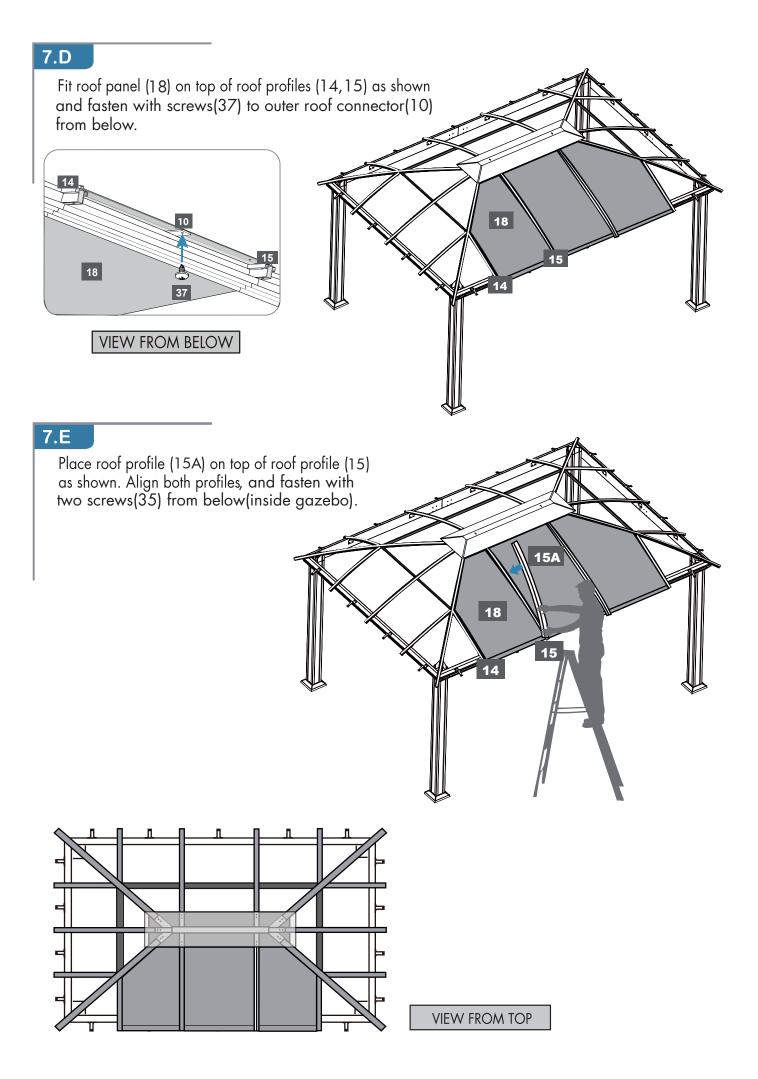



7.F

Fit roof panel(19,20,21,22) on top of roof profiles(11,12,13,14) as shown and fasten with one screw (37) to outer roof connector(10).


Place roof profiles(11A) on top on roof profiles(11) and fasten with screws(35) from below.





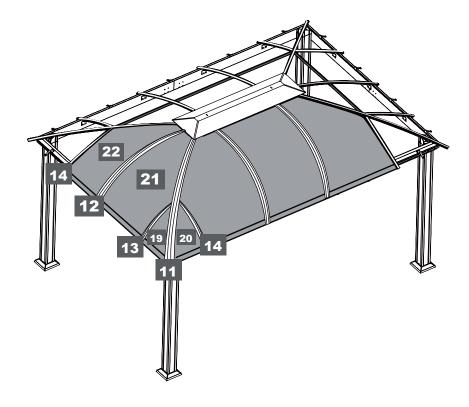

7.G

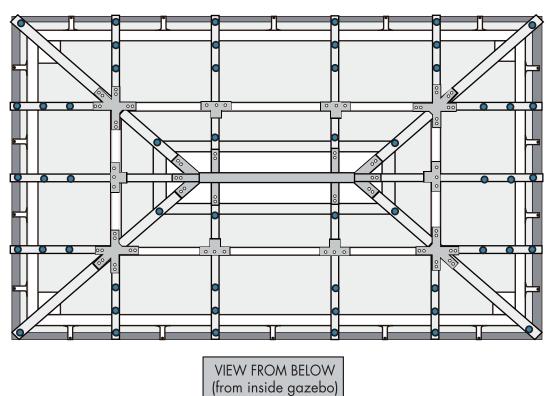


• Positions of screws (35) from below roof

Continue in a clock-wise direction as shown. 15A 14A 13A 15A 11A 11A 17 18 20 16 19 20 19 14A **13A** 21 22 12A 12A 21 22 13A 19 17 18 16 20 11A 15A 14A 15A][

VIEW FROM TOP


7.1

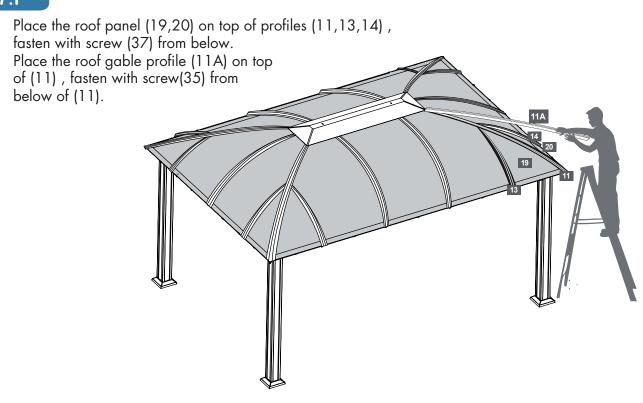


7.H


7.J


Place the roof gable profile(13A) on top of(13), fasten with screw(35) from below of (13).

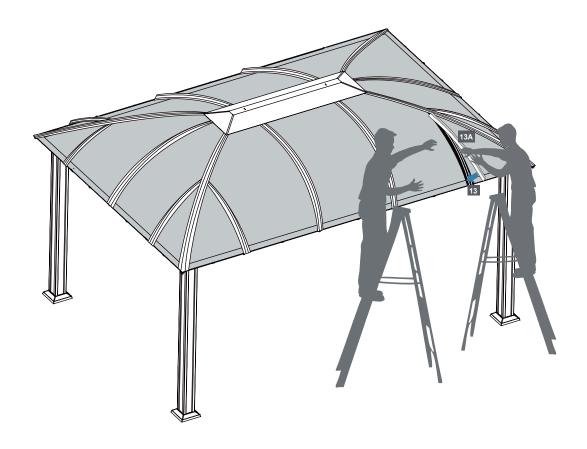


STEP 8 Installing the Plastic Caps







Close off roof profiles (12/13/14/15) with plastic caps #1(40) and roof profiles (11) with plastic caps #2 (41).



ENJOY YOUR
COMPLETED GAZEBO !

Gazebo GZ3DXL Aluminium Composite Roof Panels

Assembly Instructions

WARRANTY:

Warranty covers damage due to manufacturing defects only. Warranty does not cover weather inflicted damage (Force Majeure) and/or damages caused by not following assembly instructions and adhering to warnings in manual.

ATTENTION: Roof profiles, roof panels and gables must be aligned properly during assembly to minimize any possibility of leaking.



Paragon Group USA

Customer Service: (877) 782 4482 Email:cs-outdoors@paragongroupusa.com