



HyperKit-XW2S50K - 80220405X



MAGNETIC RETROFIT KIT LED LIGHTS

HYPERIKON®


SPECIFICATIONS

Model Name	SKU	Wattage	Lumens	Efficacy	Kelvin
HyperKit-20W2S50K	802204050	20W	2,500 Lm	125 Lm/W	5000K
HyperKit-36W2S50K	802204051	36W	4,500 Lm	125 Lm/W	5000K

The Hyperikon Magnetic LED Retrofit Kit makes the LED conversion process as simple as can be, requiring no modifications to the existing structure! This kit can be installed in any recessed troffer or drop ceiling fixture.

MODEL DESIGN

802204050	802204051
Length 2ft (0.61m)	Length 4ft (1.22m)

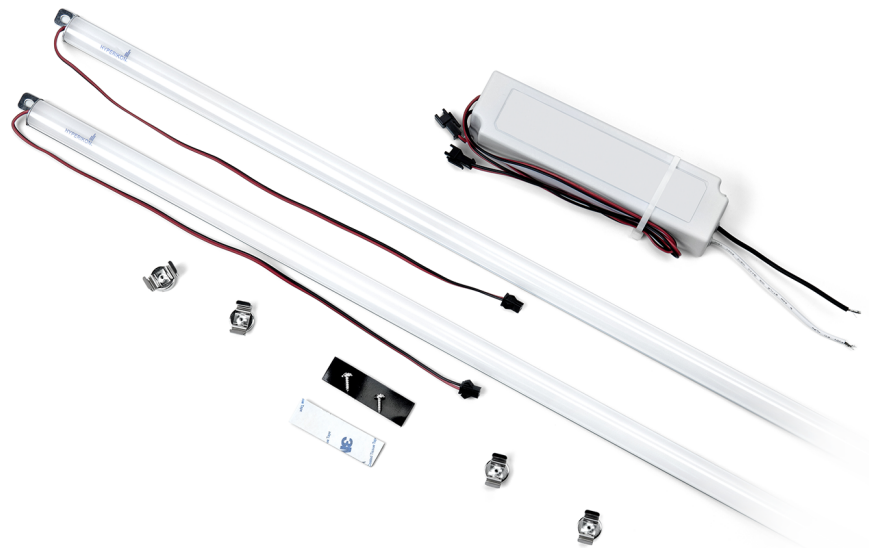

Voltage
100-277V



Base
E26



Beam Angle
150°



CRI
84+



Dimmer Not
Recommended



Temperature
-22 °F to 130 °F

- Suitable for damp locations outside as well as inside.
- 50,000+ hours of lifespan, more than 47.5 years based on 3Hrs/day average.

INCLUDED

- Included in box: LED driver (1pc), LED strips (2pcs), Magnetic "U" bracket (4pcs), Self tapping screws (2pcs), and Soft magnetic strip (2pcs).

WARNINGS AND CAUTIONS

- Turn power off before inspection, installation or removal. Risk of electric shock - do not use where directly exposed to water or weather.
This device is not intended for use with emergency exit fixtures or emergency exit lights.

HYPERIKON®

(888) 846-4973
 info@hyperikon.com
 707 Broadway Suite 800
 San Diego, CA 92101
 www.hyperikon.com

