

# Follow This Step-By-Step Guide To Using Your Generator

**1** Remove Generator From Package

**2** Add Oil

Oil Type: SAE10W-30 Oil (Must add BEFORE first use)  
Oil Capacity: 22.0 fluid oz  
Because this generator includes Low Oil Shut Off, the generator will not start with low oil. Start out with 22.0 oz, then fill until almost overflowing.)

**3** Add Fuel

Unleaded gasoline only octane rating of 87 or higher  
Maximum Capacity: 4.5 Gallon fuel tank

**4** Start The Generator

- Use the generator OUTDOORS in a WELL VENTILATED AREA.
- DO NOT CONNECT electrical devices until AFTER the generator is started.
- Turn Power Switch to ON
- Turn FUEL SWITCH to ON (Figure A)
- Pull out the CHOKE LEVER fully to Start (Figure B)
- Start the generator manually with the Recoil (Pull) Start.
- Once the engine has started, GRADUALLY push the choke lever halfway to warm up until the engine levels off. Then push in completely to run.
- Wait approximately 5 minutes BEFORE adding appliances or tools.



Fuel Switch (Figure A)



Choke (Figure B)

## GEN4000IOF

3,850 Surge / 3,500 Running Watts


**UNLEADED GASOLINE FUEL**

### GENERATOR SPECIFICATIONS:

- 2 - 120V A/C Outlets
- 1 - 120V RV Outlet
- 2 x USB Ports
- Recoil Start
- Parallel Port Output Capability (Parallel Cable Available Separately)
- Sine Wave Output For Sensitive Electronics
- 6.5 HP OHV Engine
- Displacement: 223cc
- Phase: Single
- AC Voltage: 120V @ 60Hz
- Decibel Rating <65 db @ 24 Feet
- Complies with EPA emissions
- Engine Run Time: 10 Hours @ 50% Load
- Fuel Tank Capacity: 4.5 Gallon
- High Altitude Use: This generator is not recommended for high altitude use above 3,000 feet.
- If you are using a generator at 3,000 feet above sea level, the generator may not function properly because of air flow getting through the carburetor.
- Warranty: 2 YEAR Limited Emissions
- Warranty: 1 YEAR Limited

**OIL IS NOT INCLUDED WITH THIS GENERATOR. IT IS SOLD SEPARATELY.**

Read and understand instruction manual before using generator.

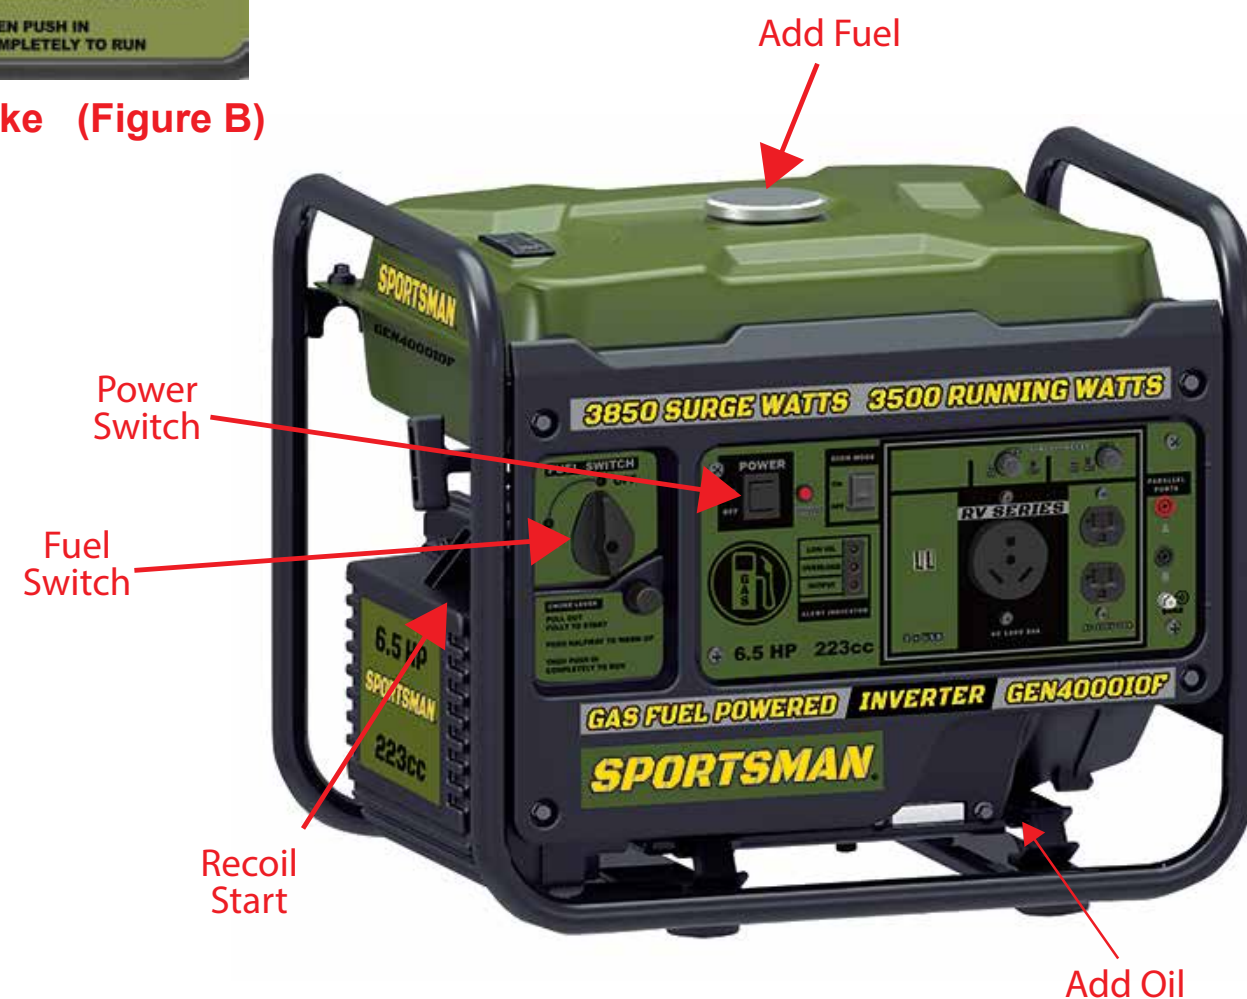

## WARNING

**IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!**

Always follow Warning labels placed on the generator, and read and follow all Warning labels included inside the Product Manual.

WARNING: NEVER use a generator inside a home or a garage, EVEN IF the doors and windows are open.

ONLY USE OUTSIDE and far way from windows, doors and vents leading into an enclosed area.

Using a generator indoors can kill you in minutes. The generator produces an exhaust that contains carbon monoxide. This is a poison you cannot see or smell.


Do not attach a chain or rope to secure the generator to a post as this can be difficult to remove in the event of an emergency.

## GEN4000IOF

3,850 Surge / 3,500 Running Watts

**UNLEADED GASOLINE FUEL**

### CONTROL PANEL FEATURES

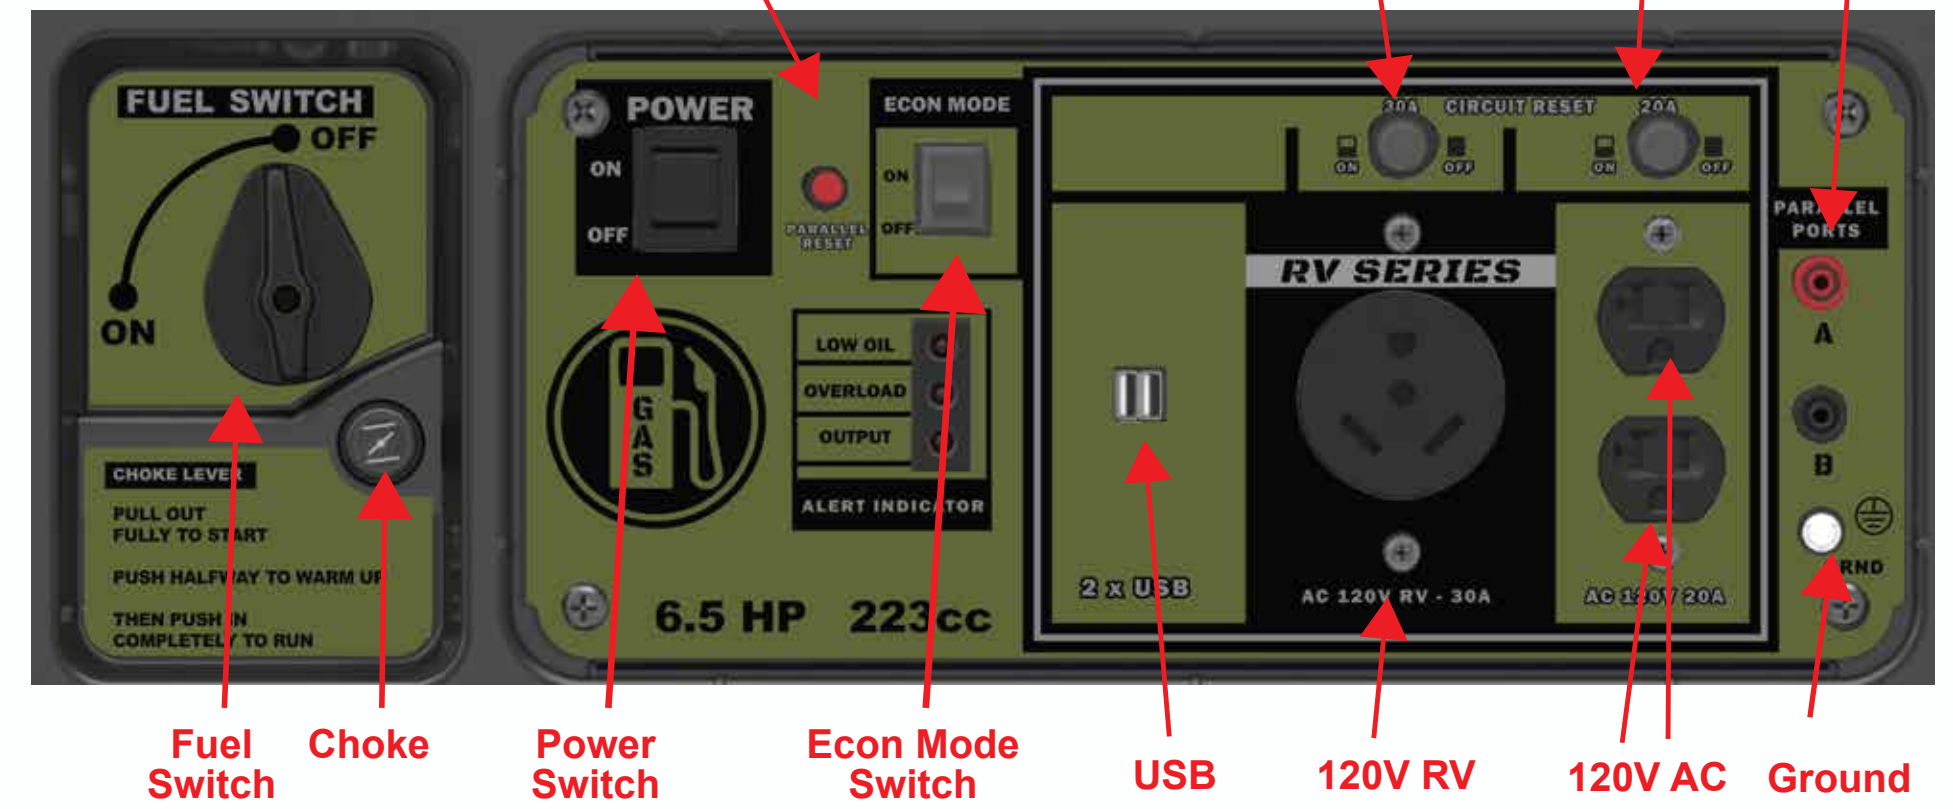

DO NOT CONNECT electrical devices until AFTER the generator is started.

## WARNING

**IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!**

Always follow Warning labels placed on the generator, and read and follow all Warning labels included inside the Product Manual.

WARNING: NEVER use a generator inside a home or a garage, EVEN IF the doors and windows are open.

ONLY USE OUTSIDE and far away from windows, doors and vents leading into an enclosed area.

Using a generator indoors can kill you in minutes. The generator produces an exhaust that contains carbon monoxide. This is a poison you cannot see or smell.

Do not attach a chain or rope to secure the generator to a post as this can be difficult to remove in the event of an emergency.

## NOTES

Outlets available on this generator, from left to right:

- 1 x 120 Volt RV Outlet
- 2 x 120 Volt A/C Outlets

**TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436**

Need Help? Call Us First!

Monday-Friday 8:00-4:00 Central Time

Visit our website for Troubleshooting & Frequently Asked Questions

**SPORTSMAN**

[www.sportsmanseriesbrand.com/generators](http://www.sportsmanseriesbrand.com/generators)

**TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436**

Need Help? Call Us First!

Monday-Friday 8:00-4:00 Central Time

Visit our website for Troubleshooting & Frequently Asked Questions

**SPORTSMAN**

[www.sportsmanseriesbrand.com/generators](http://www.sportsmanseriesbrand.com/generators)