




Item#1003560841,1003560854,1003560862
1003560868,1003560857,1003560856
1003572204,1003560855,1003560867
1003560864,1003611161

USE AND CARE GUIDE

Husky Heavy Duty Welded Steel Garage Storage Series

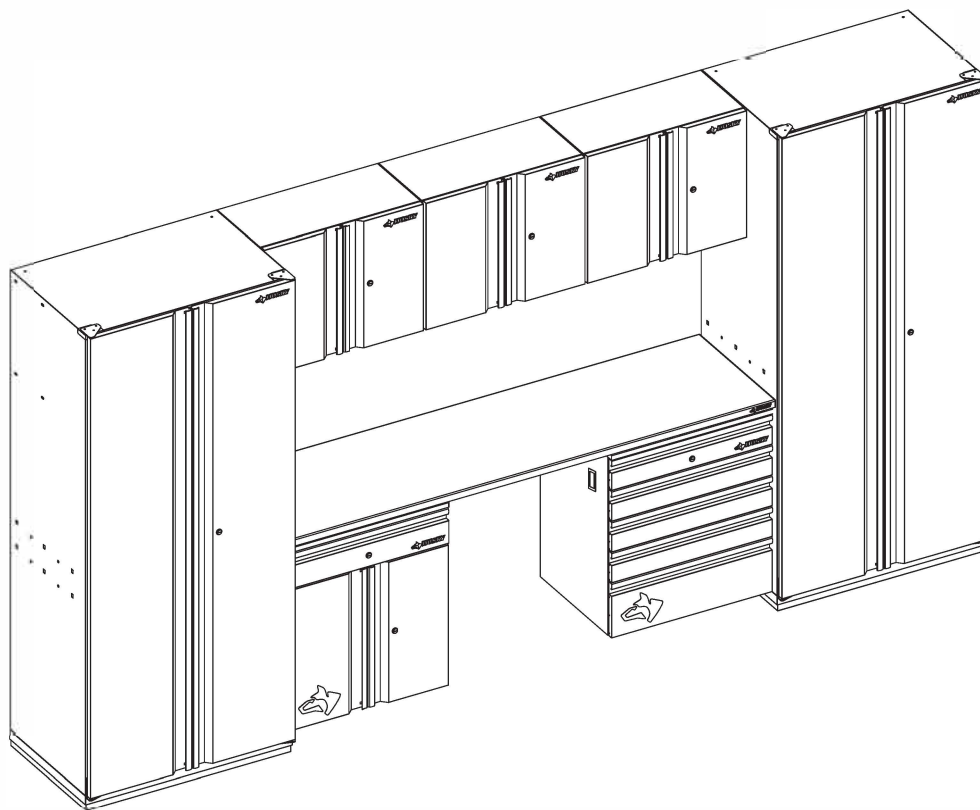

THANK YOU

We appreciate the trust and confidence you have placed in Husky through the purchase of this Husky Welded Cabinet. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Husky!

Table of Contents

Table of Contents.....	2	Installing the Closet Rod.....	16
Safety Information.....	2	Installing the Rubber Grommets.....	16
Warranty.....	4	Installing the Shelf.....	17
Pre-installation.....	5	Adjust the Leveling Feet.....	18
Before you Begin.....	5	Attaching Cabinet onto Studded Wall.....	19
Tools Required.....	5	Installing the Wall Cabinet.....	20
Weight Capacity.....	6	Hanging the Wall Cabinet.....	20
Hardware Included.....	7	Fastening the Cabinet.....	22
3pcs-5 Drawer Cabinet Package Contents.....	7	Installing the LED Light.....	23
3pcs-Split Cabinet Package Contents.....	8	Connecting the LED Lights.....	23
4pcs-5 Drawer Cabinet Package Contents.....	8	Connecting to the Power Supply.....	23
4pcs-Split Cabinet Package Contents.....	9	Turning the Fixture on/off	23
2 Door Cabinet Package Contents.....	9	Installing the LED Light onto the Cabinet.....	24
5 Drawer Cabinet Package Contents.....	10	Installing the Work Surface.....	25
Work Surface Package Contents.....	10	Installing the Workbench	26
Workbench Package Contents.....	11	Operation	27
LED Kit Package Contents.....	11	Using the Tall Cabinet Catch Plate	27
Caster Kit Package Contents.....	12	Adjusting the Pull Out Drawer in Tall Cabinet.....	28
Assembling the Base Cabinet.....	12	Adjusting the Door Hinge.....	30
Installing the Adjustable Feet.....	12	Removing the Drawer.....	31
Installing the Casters	13	Installing the Drawer	31
Installing the Shelf	14	Registration for Power Strip	32
Installing the Anti-tip Bracket	15	Troubleshooting.....	32
Assembling the Tall Cabinet.....	16	Care and Cleaning	32

Safety Information

To reduce the risk of serious injury, read and follow the safety instructions below before assembling and using this product.



CAUTION: This product is not designed for commercial nor industrial usage.



CAUTION: This product is intended for indoor use only.



CAUTION: Use at least two people to move, assemble or install this product. Failure to do so can result in personal injury or product damage.



CAUTION: Close and lock the doors before moving this product.



CAUTION: DO NOT alter this product in any manner. This may cause product damage or personal injury.



CAUTION: DO NOT leave children unattended near to product. Cabinet may tip over if improperly opened.



CAUTION: Check all nuts and bolts periodically for tightness. When required, tighten them.



CAUTION: Any assembly or maintenance of the product must be carried out by adults only.



CAUTION: Keep the product on level surface. The product could become unstable and it may tip over if stored or moved on an uneven surface, which may cause personal injury, death or product damage.



CAUTION: Any assembly or maintenance of the product must be carried out by adults only.



CAUTION: DO NOT stand on the product and do not use it as scaffold.




CAUTION: It is always recommended to secure this product to the wall with the anti-tip hardware provided.


Safety Information

For LED Kit

When installing or using the under cabinet LED lighting system, basic safety precautions should always be taken including the following:


- ☐ Read all instructions before installing this lighting
- ☐ Save these instructions for future reference.
- ☐ Route and secure the cords so that they will not be pinched or damaged. Do not attempt to install the fixtures while plugged in.
- ☐ The fixture contains non-replaceable LEDs.


 **CAUTION:** This portable luminaire does not have a polarized plug as a feature to reduce the risk of damaging the LED light fixture.


 **CAUTION:** Never use with an extension cord unless the plug can be fully inserted. Do not alter the plug.

 **CAUTION:** DO NOT install this product in a damp or wet location.

 **CAUTION:** DO NOT install this product in an outdoor location.


 **CAUTION:** DO NOT use chemical solvents or harsh abrasives to clean the fixture.

 **CAUTION:** The connection cable does not allow to be lengthened or shortened. Make sure the plug of the connection cable is fully inserted into the light fixtures before turn of the light.


 **CAUTION:** This 23.6 in. LED Linkable Undercabinet Light set is used only for the Husky Welded Garage Cabinet Series as the placement method required to use with ferrous metal cabinet.

NOTICE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for, installing and operating the fixture. If you have any questions, please contact our Customer Service Team at 1-888-43-HUSKY or visit www.HUSKYTOOLS.com.

For Power Strip


 **WARNING:** Modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


 **CAUTION:** DO NOT connect the power strip to an ungrounded outlet.


 **CAUTION:** This power strip is designed for indoor use only.


 **CAUTION:** DO NOT install where excessive moisture is present.


 **CAUTION:** DO NOT plug extension cords into the power strip.

 **CAUTION:** DO NOT drill into any part of the housing or open the housing for any reason. There are no user-serviceable parts inside.

 **CAUTION:** DO NOT attempt to repair, disassemble or modify this device under any circumstances. Doing so may damage the device or cause electric shock and possible injury.

 **CAUTION:** Use of this equipment in life support applications where failure of this equipment can reasonably be expected to cause the failure of the life support equipment or to significantly affect its safety or effectiveness is not recommended. Do not use this equipment in the presence of a flammable anesthetic mixture with air, oxygen or nitrous oxide.

 **CAUTION:** This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

 **CAUTION:** This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television receptions, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
Reorient or relocate the receiving antenna.
Increase the separation between the equipment and receiver.
Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technical for help.

Warranty

Lifetime Warranty for the Cabinets.

1-Year Limited Warranty for Solid Wood Top, LED Light and Power Strip.

This full warranty gives you specific rights, and you may also have other rights, which vary state to state.

The manufacturer is not responsible in any way for any damages, losses or inconveniences caused by equipment failure or by user negligence, abuse, or use non-compliant with the user manual or any additional safety, use, or warnings included in the product packaging and manual.

This warranty does not apply to the following:

Incidental/inconsequential damages and failures due to misuse, abuse, accident, alteration, or normal wear and tear.

Improper or inadequate maintenance.

Damage in return transit.

Unsupervised use by children under 18 years of age.

Contact the customer service team at 1-888-43-HUSKY or visit www.huskytools.com.

Pre-installation

BEFORE YOU BEGIN


- ☐ Begin by placing the package on a flat surface.
- ☐ Remove all cardboard, foam packaging material and clear plastic bags.
- ☐ Dispose or recycle all packaging materials.
- ☐ Verify all the contents in the box and gather tools required.

1 Unpack the package

- ☐ Unlock all the screws on the back panel of the tall cabinet.




NOTE: Screw numbers may be different based on different contents inside the Tall Cabinet.

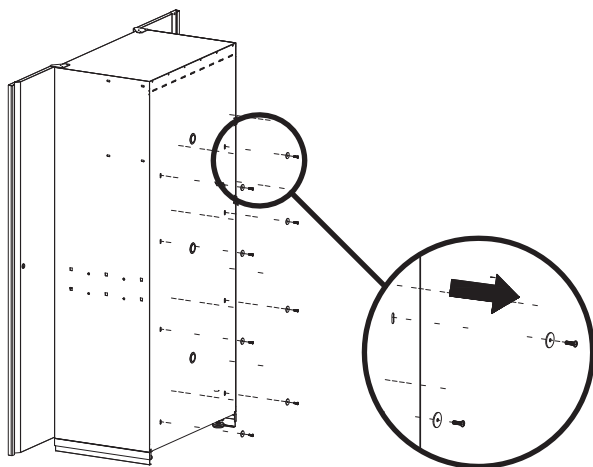


2 Remove the contents


- ☐ Remove all the contents inside the tall cabinet following the sequence shown.

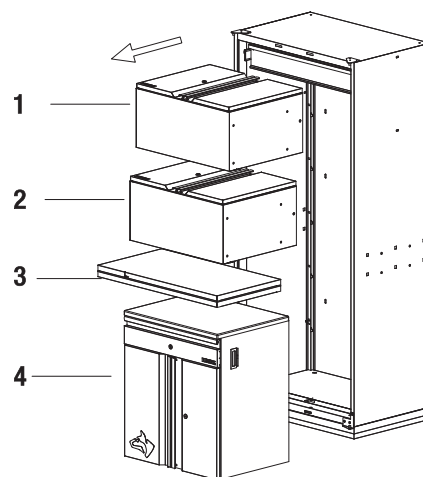

TOOLS REQUIRED




1 x Adjustable Wrench



1 x 12 Magnetic Leveler



1 x Stud Finder



1 x Knife




1 x 7/16 in.
Socket Driver
Wrench




1 x 3/8 in.
Socket Driver
Wrench



1 x 7/8 in. Socket



1 x Pencil



1 x #2 Phillips Bit




1 x #2 Phillips
Screwdriver



5 mm Hexagon
Wrench



1 x Cordless
Power Drill




1 x Hammer Drill




1 x Masonry Bit

Pre-installation (Continued)


WEIGHT CAPACITY




Split Cabinet
Max 1000lbs.

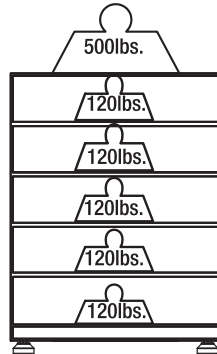


5 Drawer
Cabinet Max
1100lbs.




Wall Cabinet
Max 200lbs.

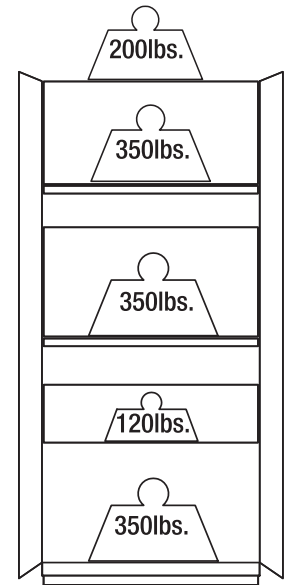


Tall Cabinet
Max 1370lbs.

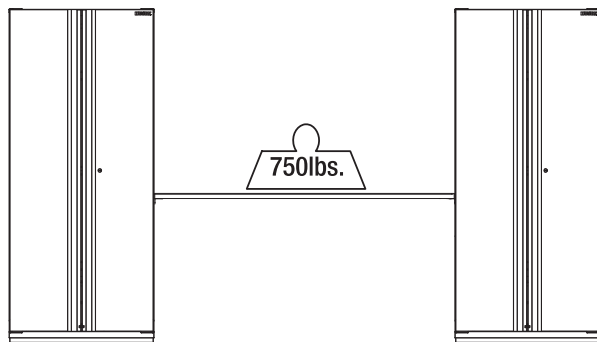

Work Surface
Max 750lbs.



2 Door Cabinet
Max 900lbs.

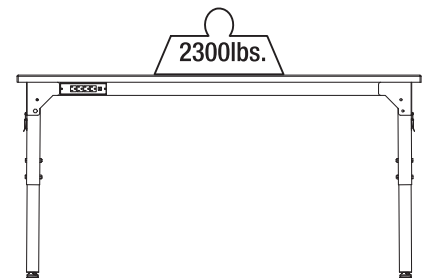

Work Bench
Max 2300lbs.

Pre-installation (Continued)

HARDWARE INCLUDED



NOTE: Hardware not shown to actual size.



AA




BB



CC



DD



EE



FF



GG




HH



II



JJ




KK

Part	Description	Quantity
AA	Shelf Clips	8
BB	Hex Bolt (1/4 in. x 5/8 in.)	20
CC	Washer (1/4 in.)	54
DD	Nut (1/4 in.)	20
EE	Anti-tip Bracket	2
FF	Plastic Anchor	2


Part	Description	Quantity
GG	Drywall Screw (5/32 in. x 2.3 in.)	2
HH	Wall Screw (1/4 in. x 2.5 in.)	14
II	Leveling Foot	4
JJ	Rubber Grommet	3
KK	5 mm Hex Wrench	1

PACKAGE CONTENTS

3PCS-5 Drawer Cabinet Package Contents

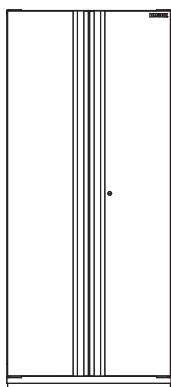


A




B



C




D



E




F



G



H



I




J

Part	Description	Quantity
A	Tall Cabinet	1
B	Wall Cabinet	1
C	Key	3
D	Hardware Pack	1
E	Wall Cabinet Bracket	1

Part	Description	Quantity
F	Shelf	2
G	5 Drawer Cabinet	1
H	Husky badge	1
I	Closet Rod	1
J	Adjustable Drawer	1

Pre-installation (Continued)


3PCS-Split Cabinet Package Contents

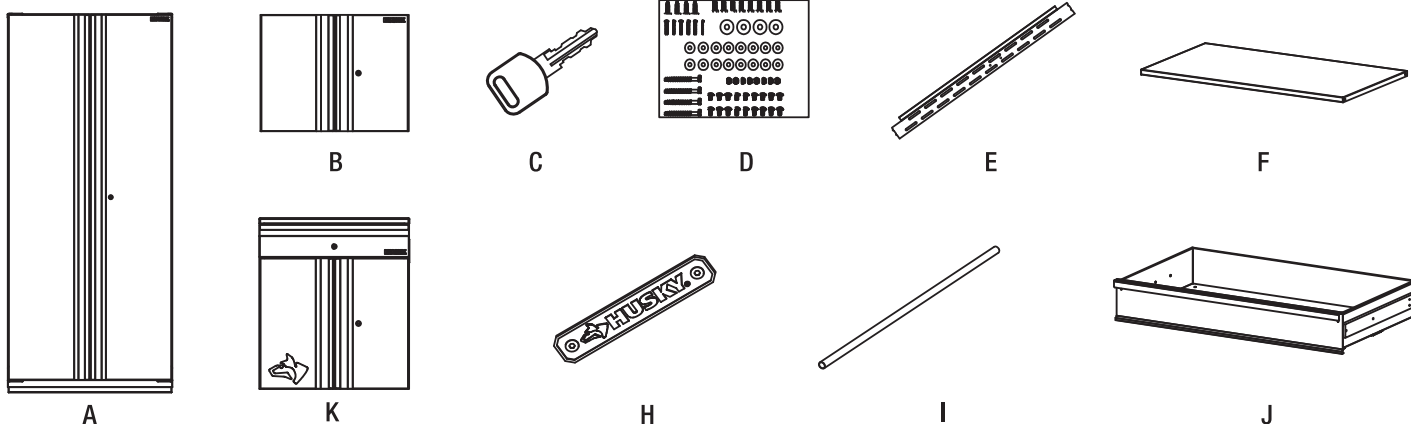

Part	Description	Quantity
A	Tall Cabinet	1
B	Wall Cabinet	1
C	Key	4
D	Hardware Pack	1
E	Wall Cabinet Bracket	1

Part	Description	Quantity
F	Shelf	2
K	Split Cabinet	1
H	Husky badge	1
I	Closet Rod	1
J	Adjustable Drawer	1

4PCS-5 Drawer Cabinet Package Contents

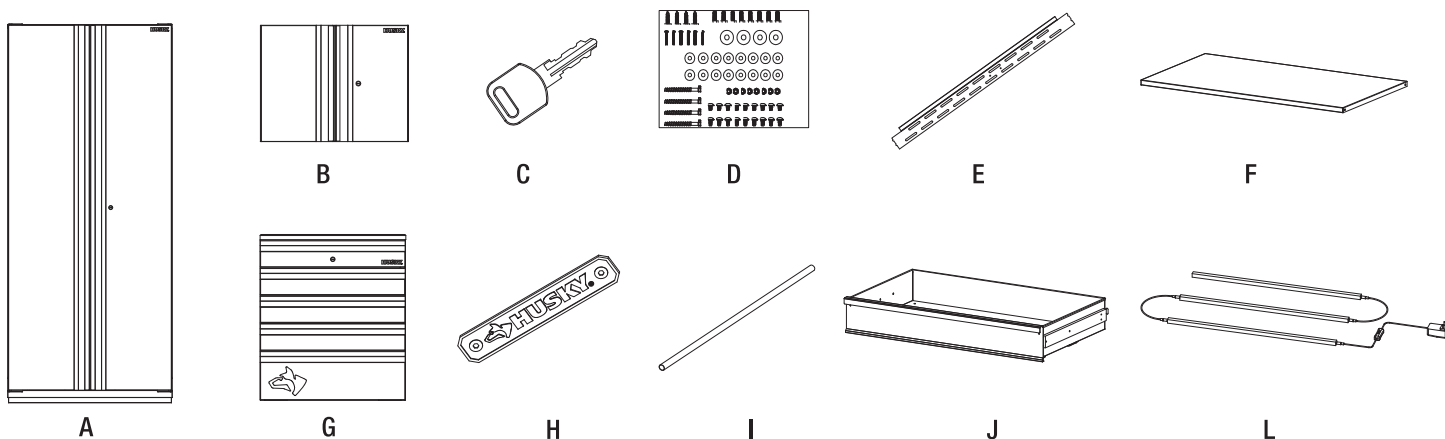


Part	Description	Quantity
A	Tall Cabinet	1
B	Wall Cabinet	2
C	Key	4
D	Hardware Pack	1
E	Wall Cabinet Bracket	2
F	Shelf	2

Part	Description	Quantity
G	5 Drawer Cabinet	1
H	Husky badge	1
I	Closet Rod	1
J	Adjustable Drawer	1
L	LED Kit	1

Pre-installation (Continued)


4PCS-Split Cabinet Package Contents

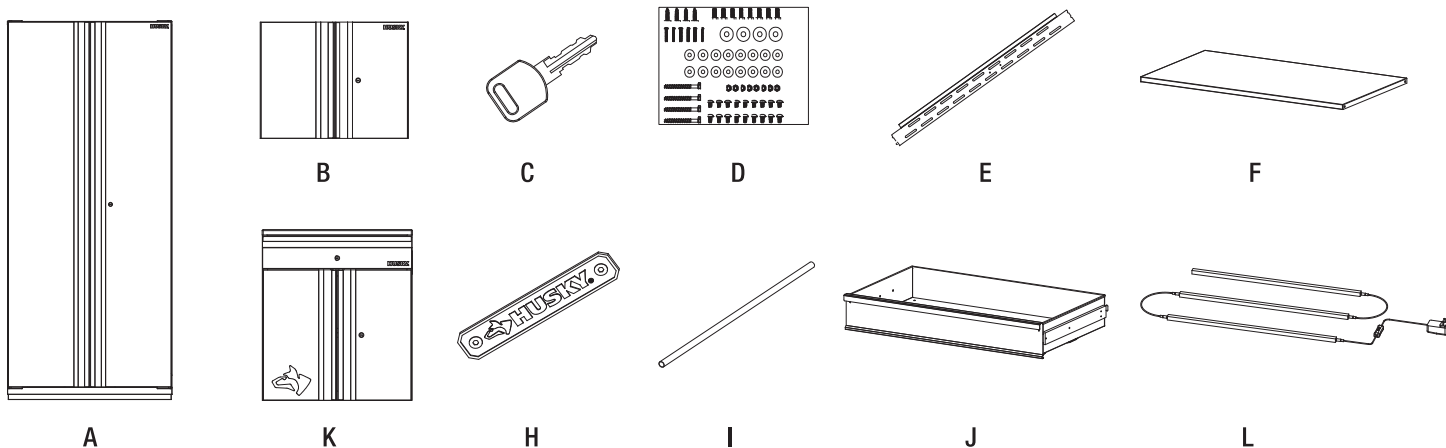

Part	Description	Quantity
A	Tall Cabinet	1
B	Wall Cabinet	2
C	Key	5
D	Hardware Pack	1
E	Wall Cabinet Bracket	2
F	Shelf	2

Part	Description	Quantity
K	Split Cabinet	1
H	Husky badge	1
I	Closet Rod	1
J	Adjustable Drawer	1
L	LED Kit	1

2 Door Cabinet Package Contents

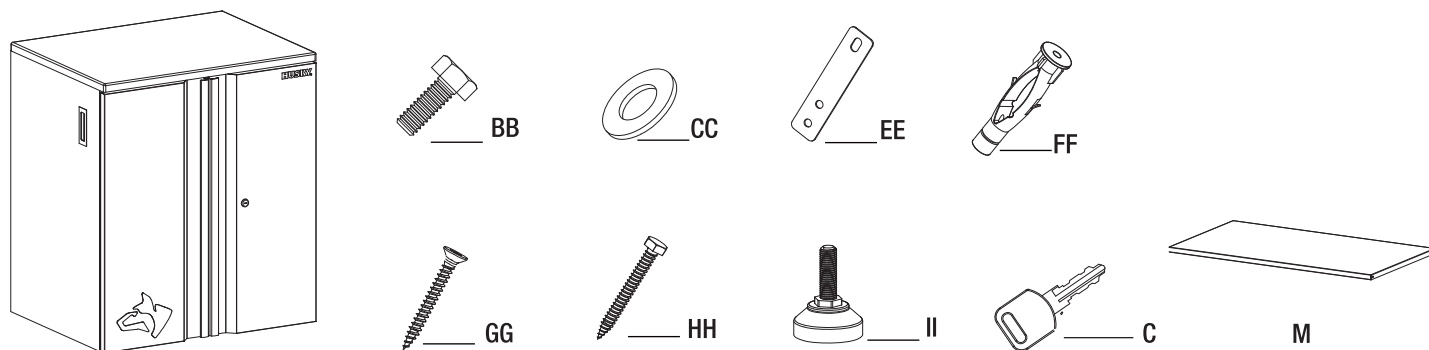


Part	Description	Quantity
BB	Hex Bolt (1/4 in. x 5/8 in.)	4
CC	Washer (1/4 in.)	4
EE	Anti-tipping Bracket	2
FF	Plastic Anchor	2
GG	Drywall Screw (5/32 in. x 2.3 in.)	1

Part	Description	Quantity
HH	Wall Screw (1/4 in. x 2.5 in.)	2
II	Leveling Foot	4
C	Key	1
M	Shelf	1

Pre-installation (Continued)


5 Drawer Cabinet Package Contents



BB



CC



EE




FF




GG



HH



II



C

Part	Description	Quantity
BB	Hex Bolt (1/4 in. x 5/8 in.)	4
CC	Washer (1/4 in.)	4
EE	Anti-tipping Bracket	2
FF	Plastic Anchor	2

Part	Description	Quantity
GG	Drywall Screw (5/32 in. x 2.3 in.)	2
HH	Wall Screw (1/4 in. x 2.5 in.)	2
II	Leveling Foot	4
C	Key	1

Work Surface Package Contents




NOTE: Below package contents apply to both wood and stainless steel work surface.



BB



CC



N



Part	Description	Quantity
BB	Hex Bolt (1/4 in. x 4/8 in.)	10
CC	Washer (1/4 in.)	10
N	Support Bracket	2

Pre-installation (Continued)

Workbench Package Contents



NOTE: Power strip is embedded in workbench.

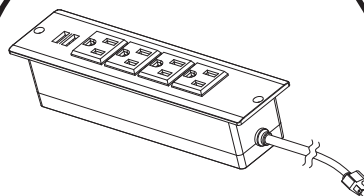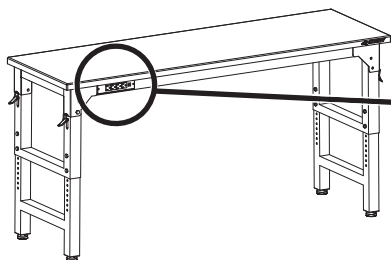

Power Strip

Power Strip Specifications

Model Number	BY-213-M042
Input	120V 12A 60HZ
Output	5V 2.1A Max
Ports	2 USB / 4 AC Outlets
Power Cord Length	59 in. (150cm)
Operation Temperature	-22°F ~ 129°F (-30°C ~ 65°C)

LED Kit Package Contents



R



S



T

Part	Description	Quantity
R	LED Connection Cable	2
S	LED Light	3
T	Power Adapter	1

LED Specifications


Model Number	HTC1000002
CCT	4000K ± 300K
Total Lumen	960LM
LED Chips	35*3PCS
Power Adapter Input	100-240V 50/60Hz 0.43A max
Output	24V 0.7A
Input Voltage of LED Light	DC24V
Rated Power Consumption	6W each xture
Total Rated Power Consumption	18W

Pre-installation (Continued)


Caster Kit Package Contents



0



P



LL



MM

Part	Description	Qu antity
0	4 in. Swivel Caster with brake	2
P	4 in. Swivel Caster without brake	2
LL	Nut (3/8 in. x 1 in.)	16
MM	Washer (3/8 in.)	16


Assembling the Base Cabinet

1 Installing the Adjustable Feet



NOTE: Remove all the loose items inside the cabinet before putting down the cabinets.

- ☐ Locate the center hole on the bottom panel at each corner and screw the adjustable foot (II) into the center hole.
- ☐ Stand the cabinet and level the feet (II).

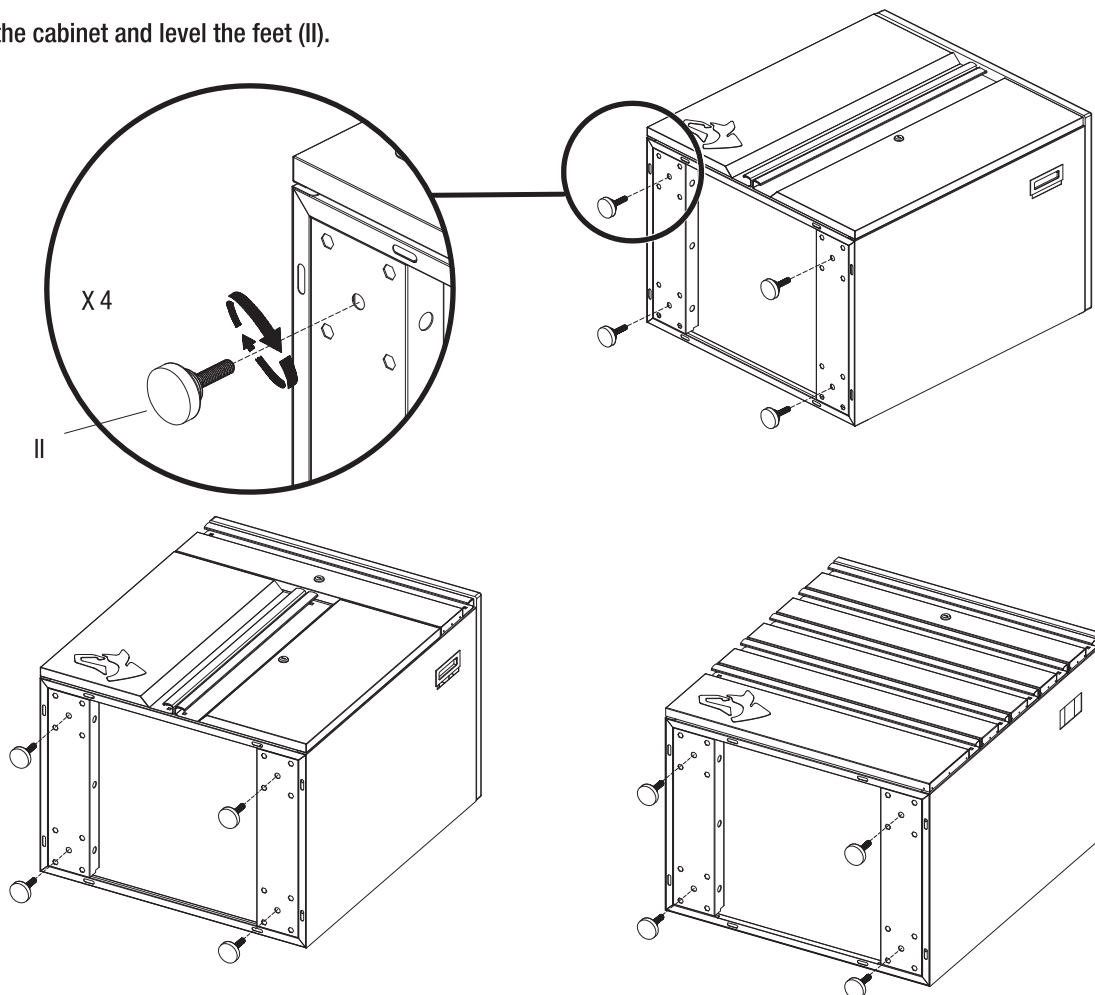

Assembling the Base Cabinet (Continued)

2 Installing the Casters (Optional)




NOTE: Remove all the loose items inside the cabinet before putting down the cabinets.

- ☐ Locate the holes forming a square on the bottom of the cabinet.
- ☐ Align the caster with brake (O) onto the holes.
- ☐ Secure the caster with brake (O) using four bolts (LL) and four washers (MM). Wrench tighten.
- ☐ Secure the other caster with brake (O) using four bolts (LL) and four washers (MM) on the same side.
- ☐ Secure the two casters without brake (P) using eight bolts (LL) and eight washers (MM). Wrench tighten.



NOTE: Ensure the two casters with brake are on the same side and not diagonal from each other.

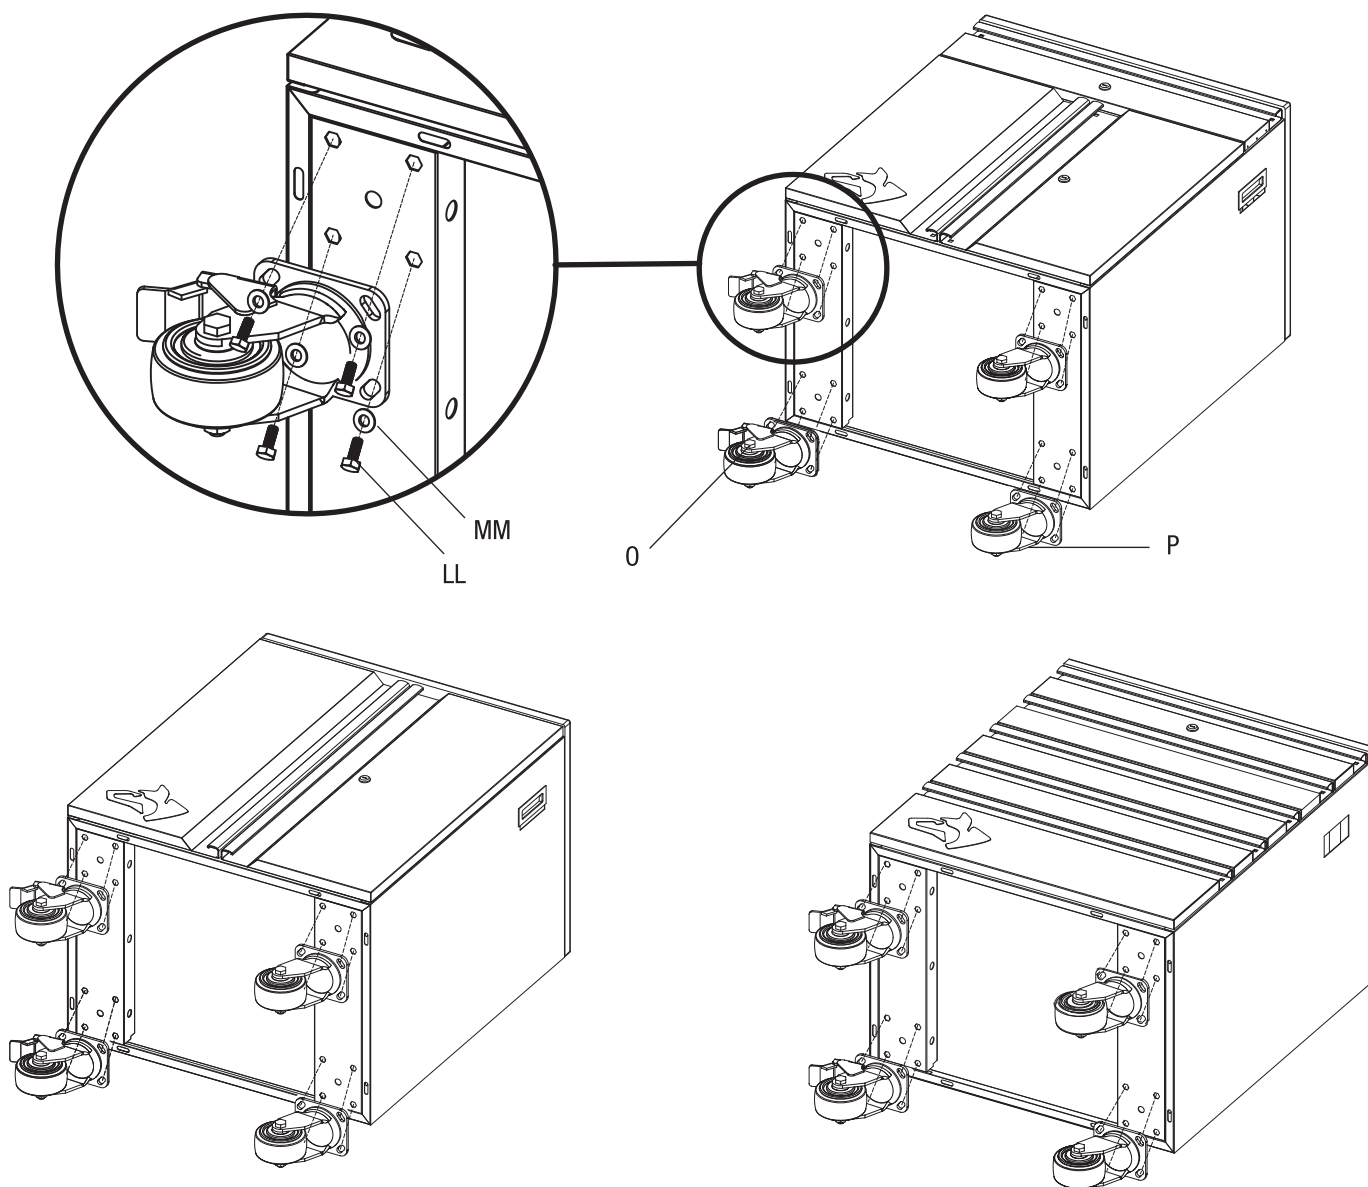

Assembling the Base Cabinet (Continued)


3 Installing the Shelf




NOTE: Make sure all the clips are at the same level.

- Open the cabinet and insert the shelf clips (AA) into the perforated holes on each corner of the cabinet.
- Insert the shelf on an angle and rotate to the level position.
- Lower the shelf onto the clips.


Install the Shelf for Split Cabinet

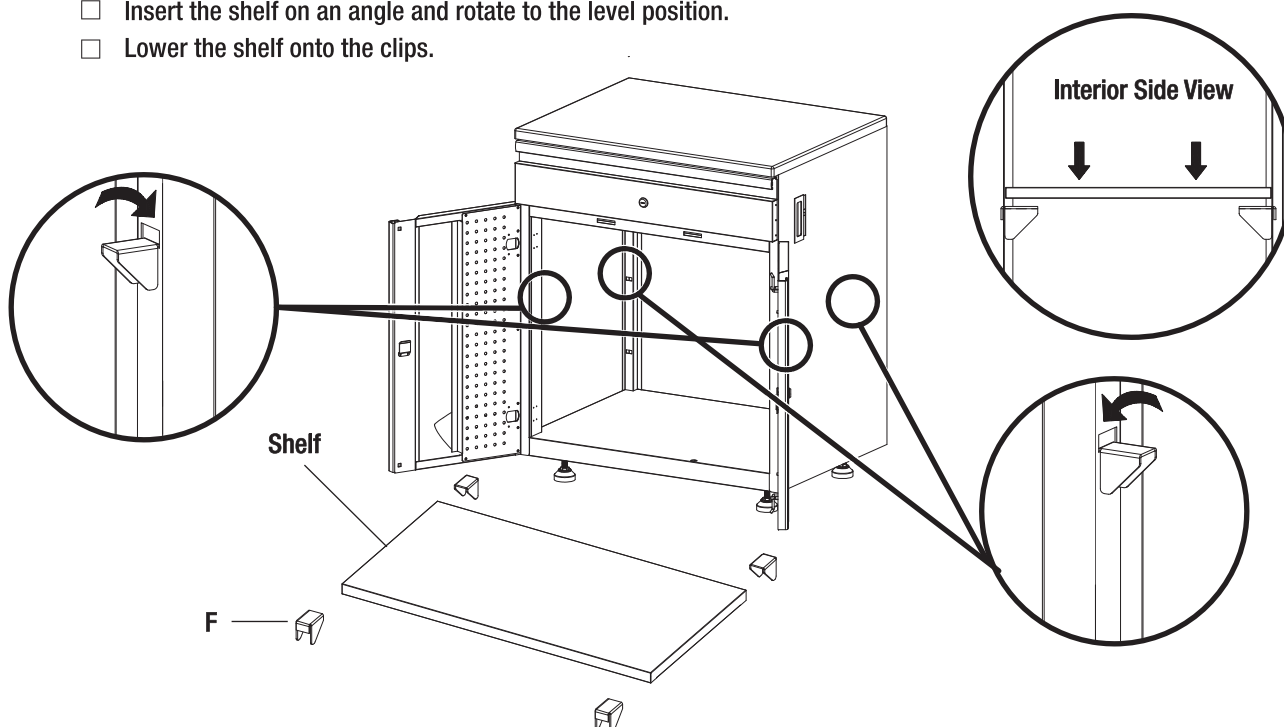

Install the Shelf for 2 Door Cabinet

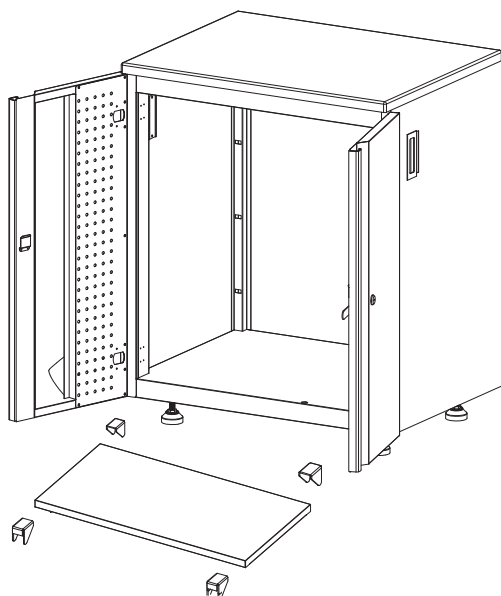

Install the Shelf for Wall Cabinet

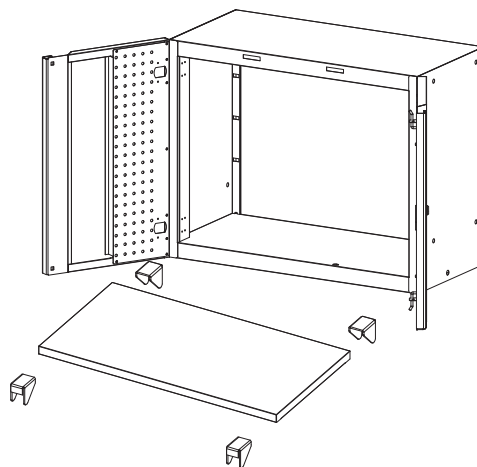

Assembling the Base Cabinet (Continued)


4 Installing the Anti-tip Bracket



NOTE: This installation applies to both the 5 drawer base cabinet and 2 door base cabinet.



Secure Anti-tip Bracket on Base Cabinet

- ☐ Locate the two holes on top of the back panel on each side of the cabinet.
- ☐ Place the anti-tip bracket (EE) and secure it with bolts (BB).
- ☐ Secure the other bracket (EE) with bolts (BB).

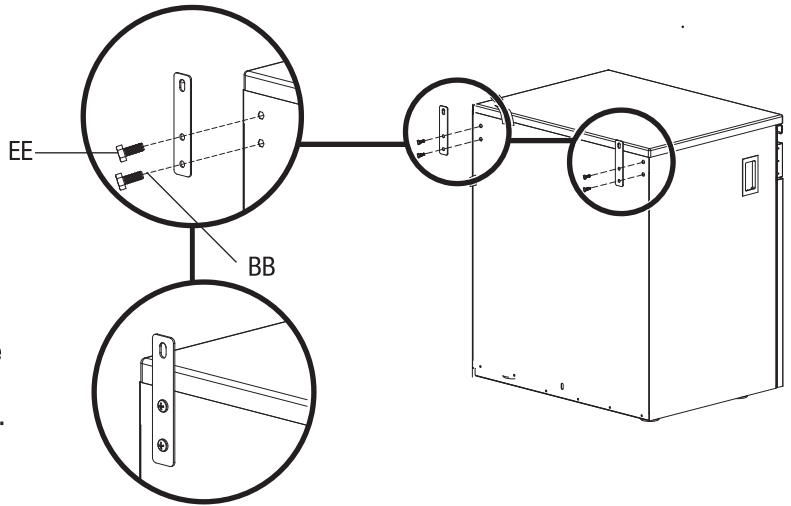

Secure Anti-tip Bracket to the Drywall

- ☐ Put the cabinet against the wall.
- ☐ Drill a pilot hole through the top perforated hole on the bracket (EE) and insert the plastic anchor into the pilot hole.
- ☐ Secure the bracket (EE) using a drywall screw (GG) and washer (CC).

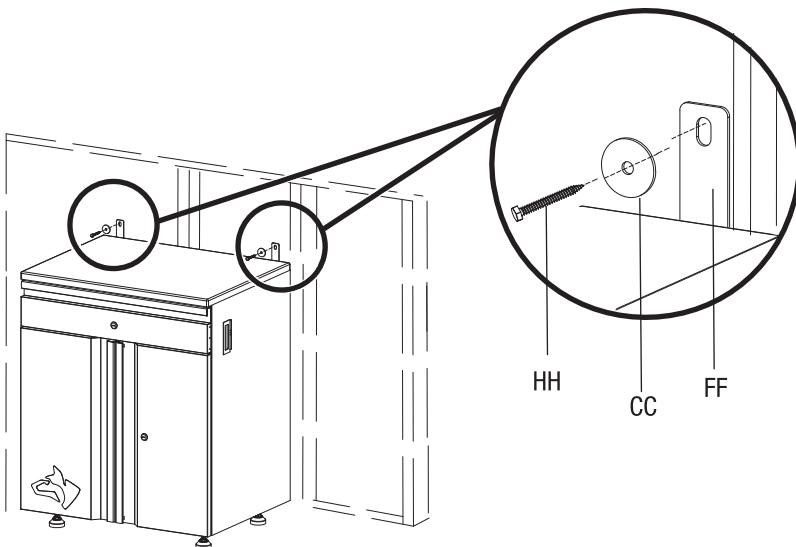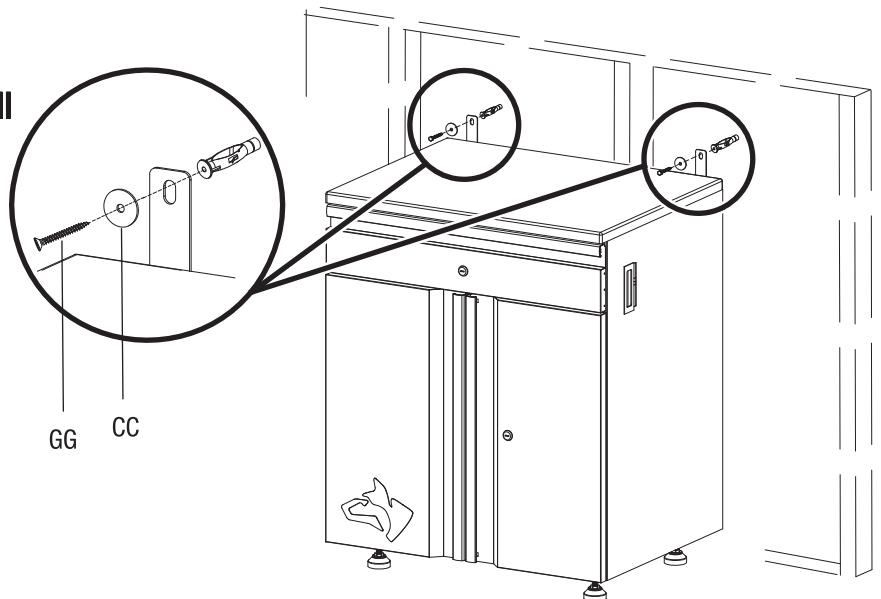

Secure Anti-tip Bracket to the Studded Wall

- ☐ Put the cabinet against the wall.
- ☐ Drill a wall screw (HH) through the top perforated hole on the bracket (EE).
- ☐ Secure the bracket (EE) with wall screw (HH) and washer (CC).



NOTE: One bracket will be locked onto the studs or both will be locked onto the drywall.

Assembling the Tall Cabinet

1 Installing the Closet Rod

- Insert the right end of the closet rod (I) into the slot, and then slide down the left end.




NOTE: Remove the pull out drawer before install the closet rod, and refer to page 31 of removing the drawer.

2 Installing the Rubber Grommets

- Insert rubber grommets (JJ) into the cut-off holes in the back panel.



NOTE: Use a box knife to cut along the perforation in the rubber grommets to create holes when necessary.

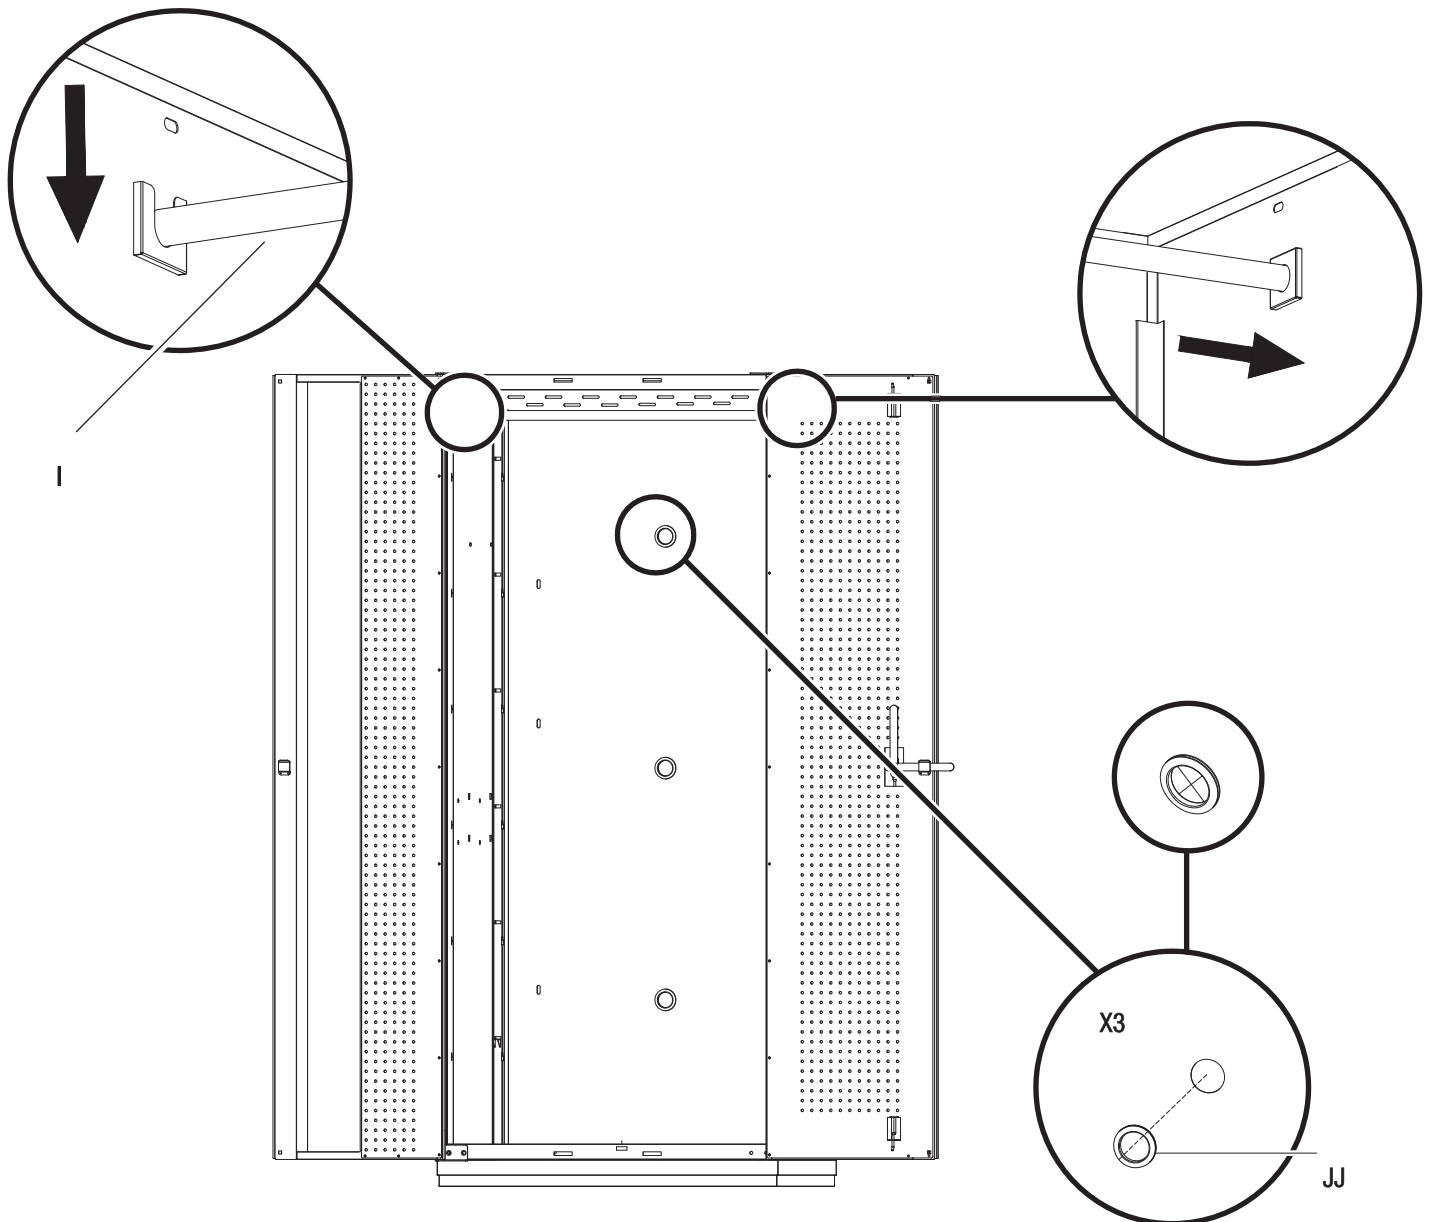


3 Installing the Shelf



NOTE: Make sure all the clips are at the same level.


- ☐ Open the cabinet and insert the shelf clips (AA) into the perforated holes on each corner of the cabinet.
- ☐ Insert the shelf (F) on an angle and rotate to the level position.
- ☐ Lower the shelf onto the clips.
- ☐ Install the other shelf (F).

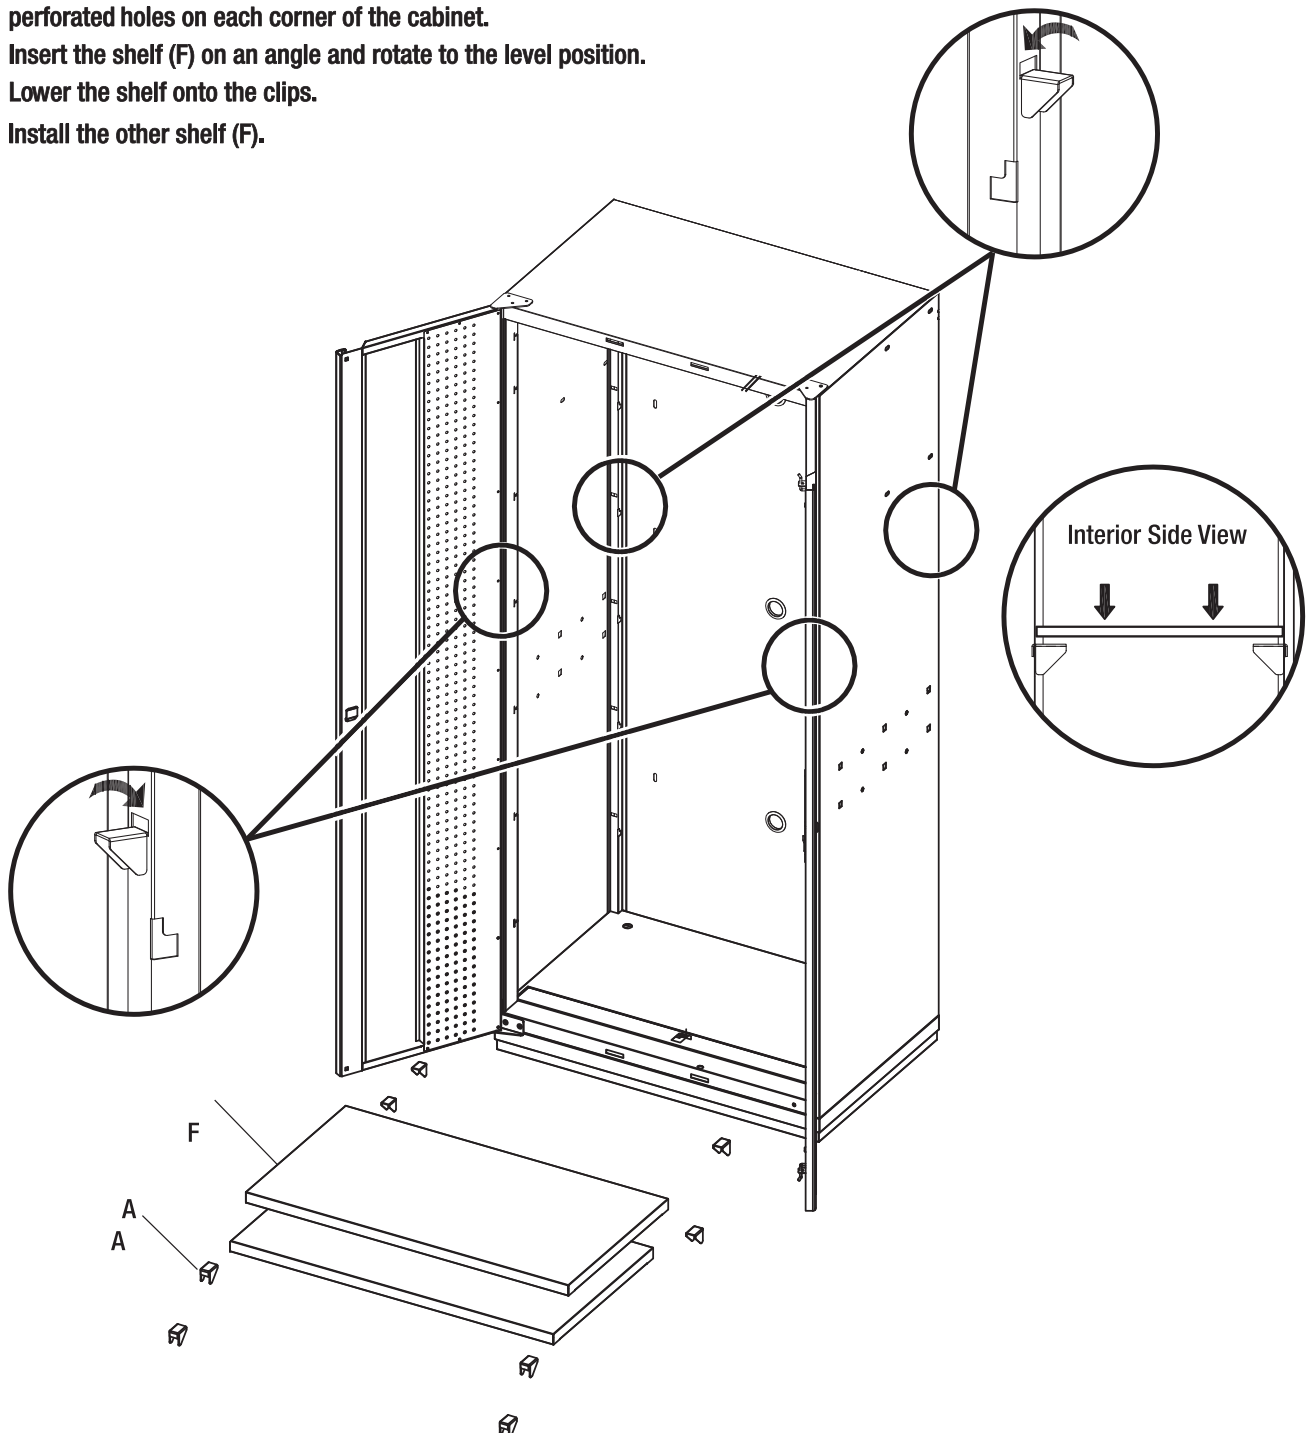

Assembling the Tall Cabinet (Continued)

4 Adjusting the Leveling Feet

- ☐ Unclench the plastic caps on the bottom panel of the tall cabinet.
- ☐ Adjust the feet from inside the cabinet to make it level using the wrench (KK).




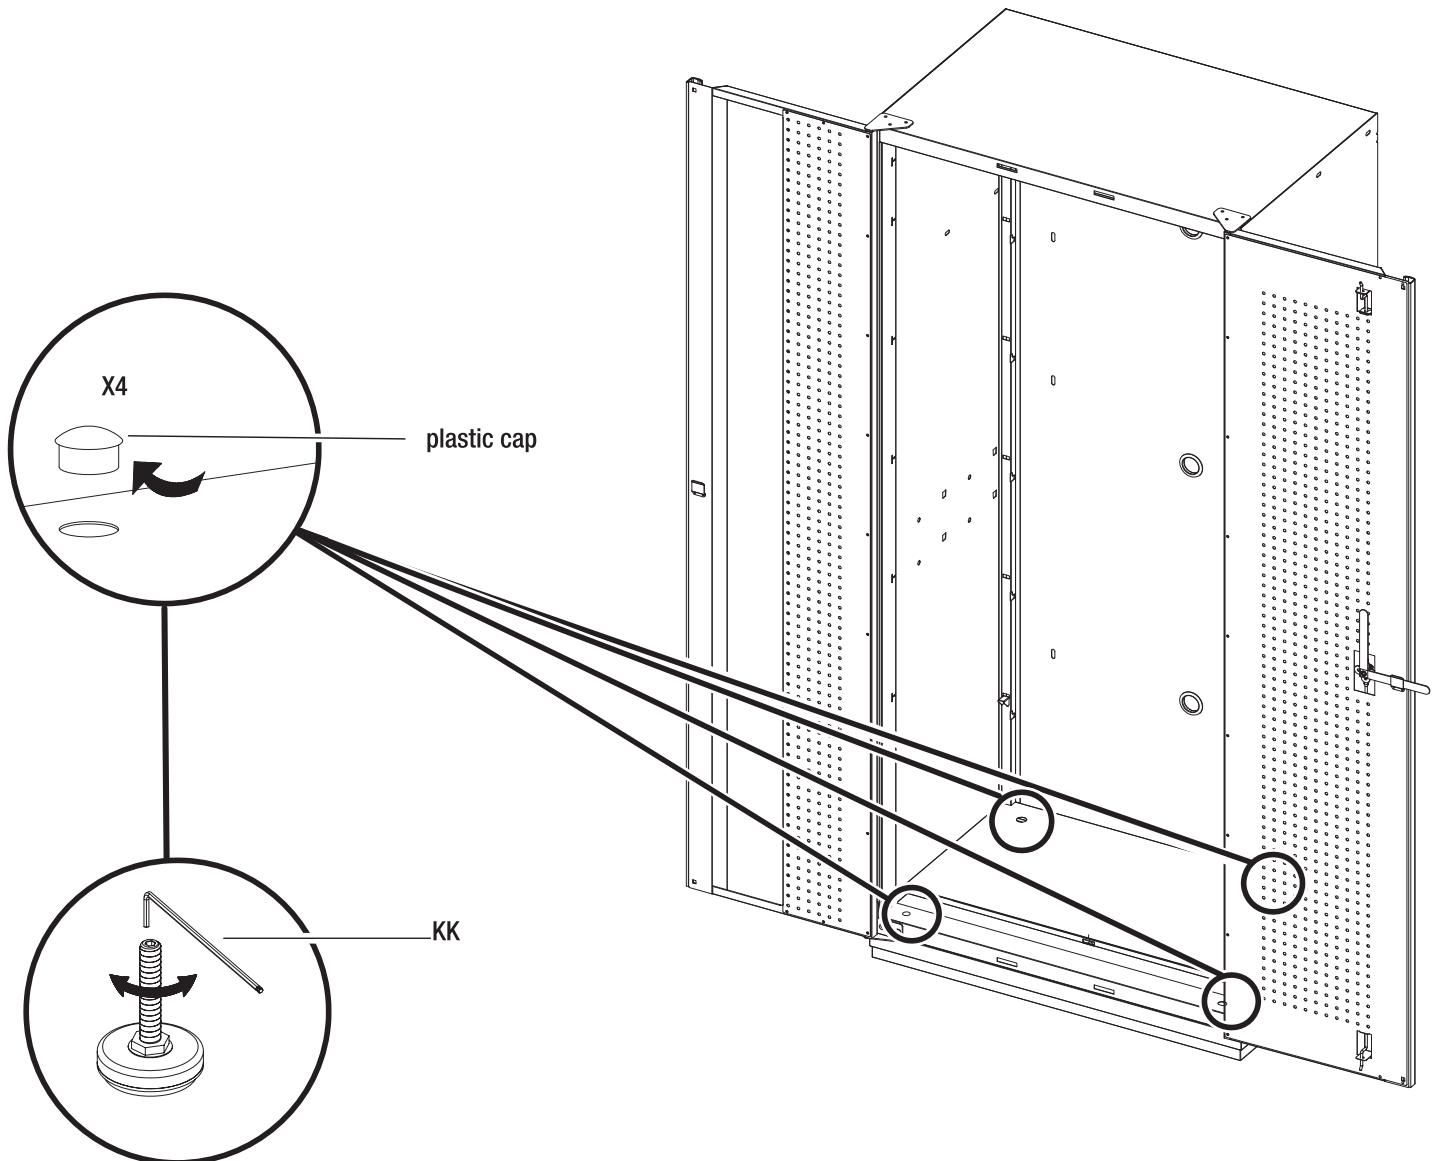


NOTE: Turn the hex wrench clockwise to raise the cabinet and counterclockwise to lower the cabinet.

Assembling the Tall Cabinet (Continued)

5 Attaching the Cabinet onto Studded Wall


- ☐ Use a stud finder to locate the studs and mark the wall with a pencil.
- ☐ Place the cabinet against the wall and align it to the stud marks.
- ☐ Level the cabinet. (Adjust the leveling feet when necessary.)
- ☐ Drill two wall screws (HH) and two washers (CC) into the wall.

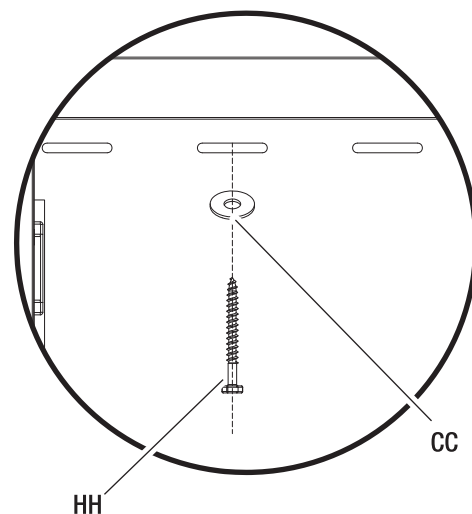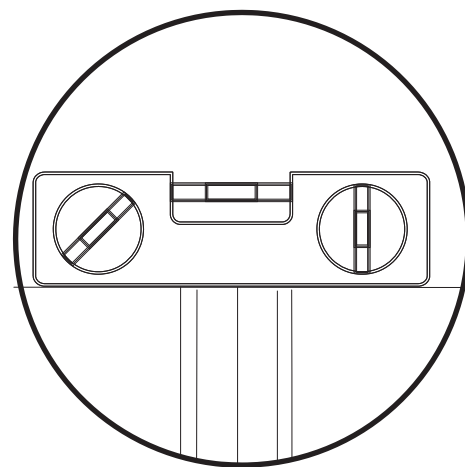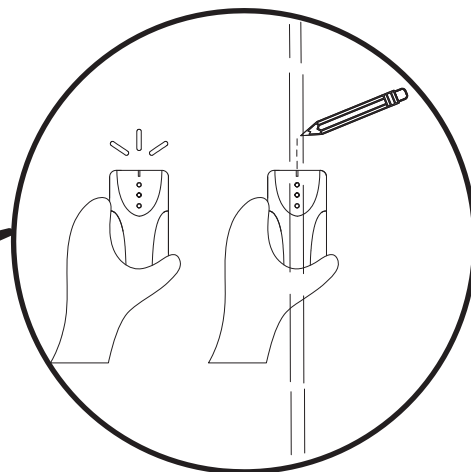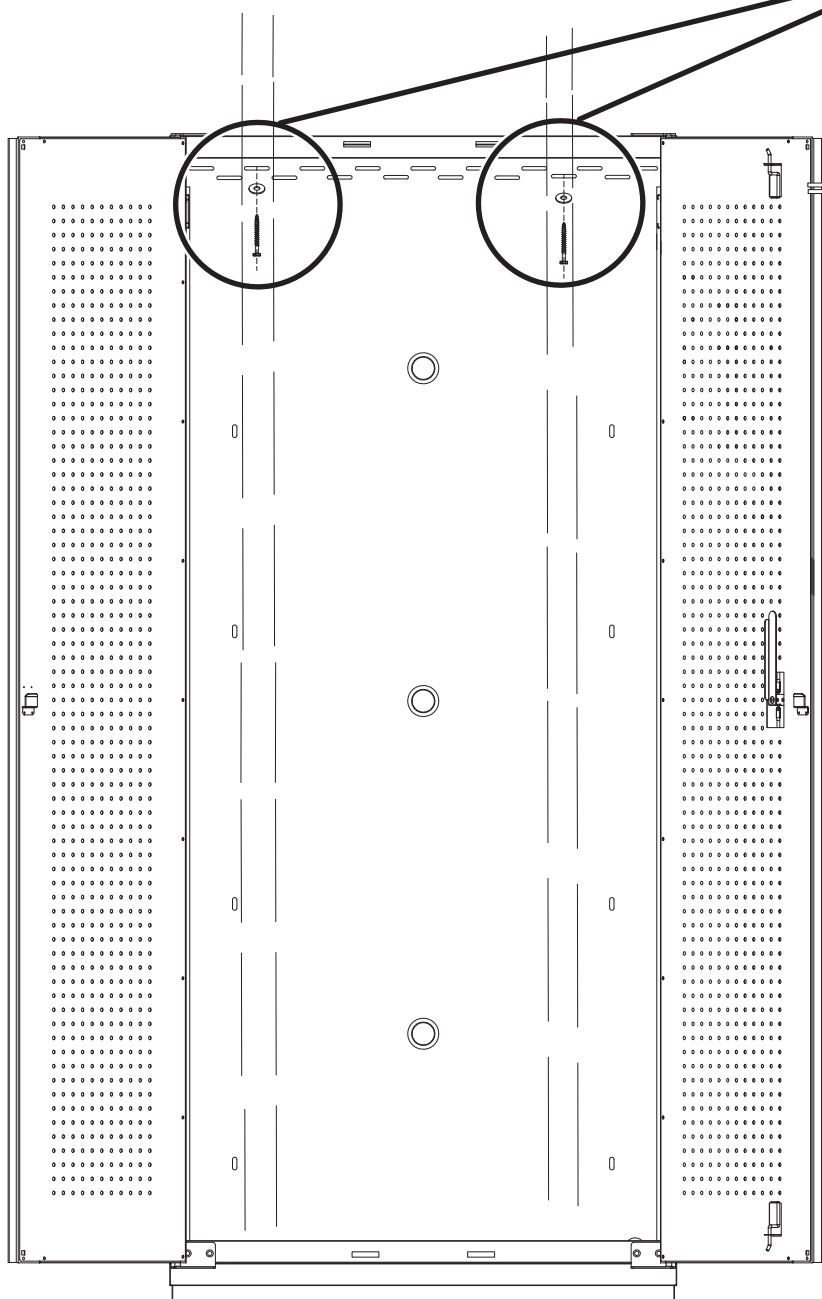

Installing the Wall Cabinet

1 Hanging the Wall Cabinet


- ☐ Use a stud finder to locate the studs and mark the wall with a pencil.
- ☐ Align the bracket (E) with two notches on the tall cabinet and level the bracket.
- ☐ Lock the bracket onto the wall with three wall screws (HH) and three washers (CC).
- ☐ Align and lock all the other brackets (E).

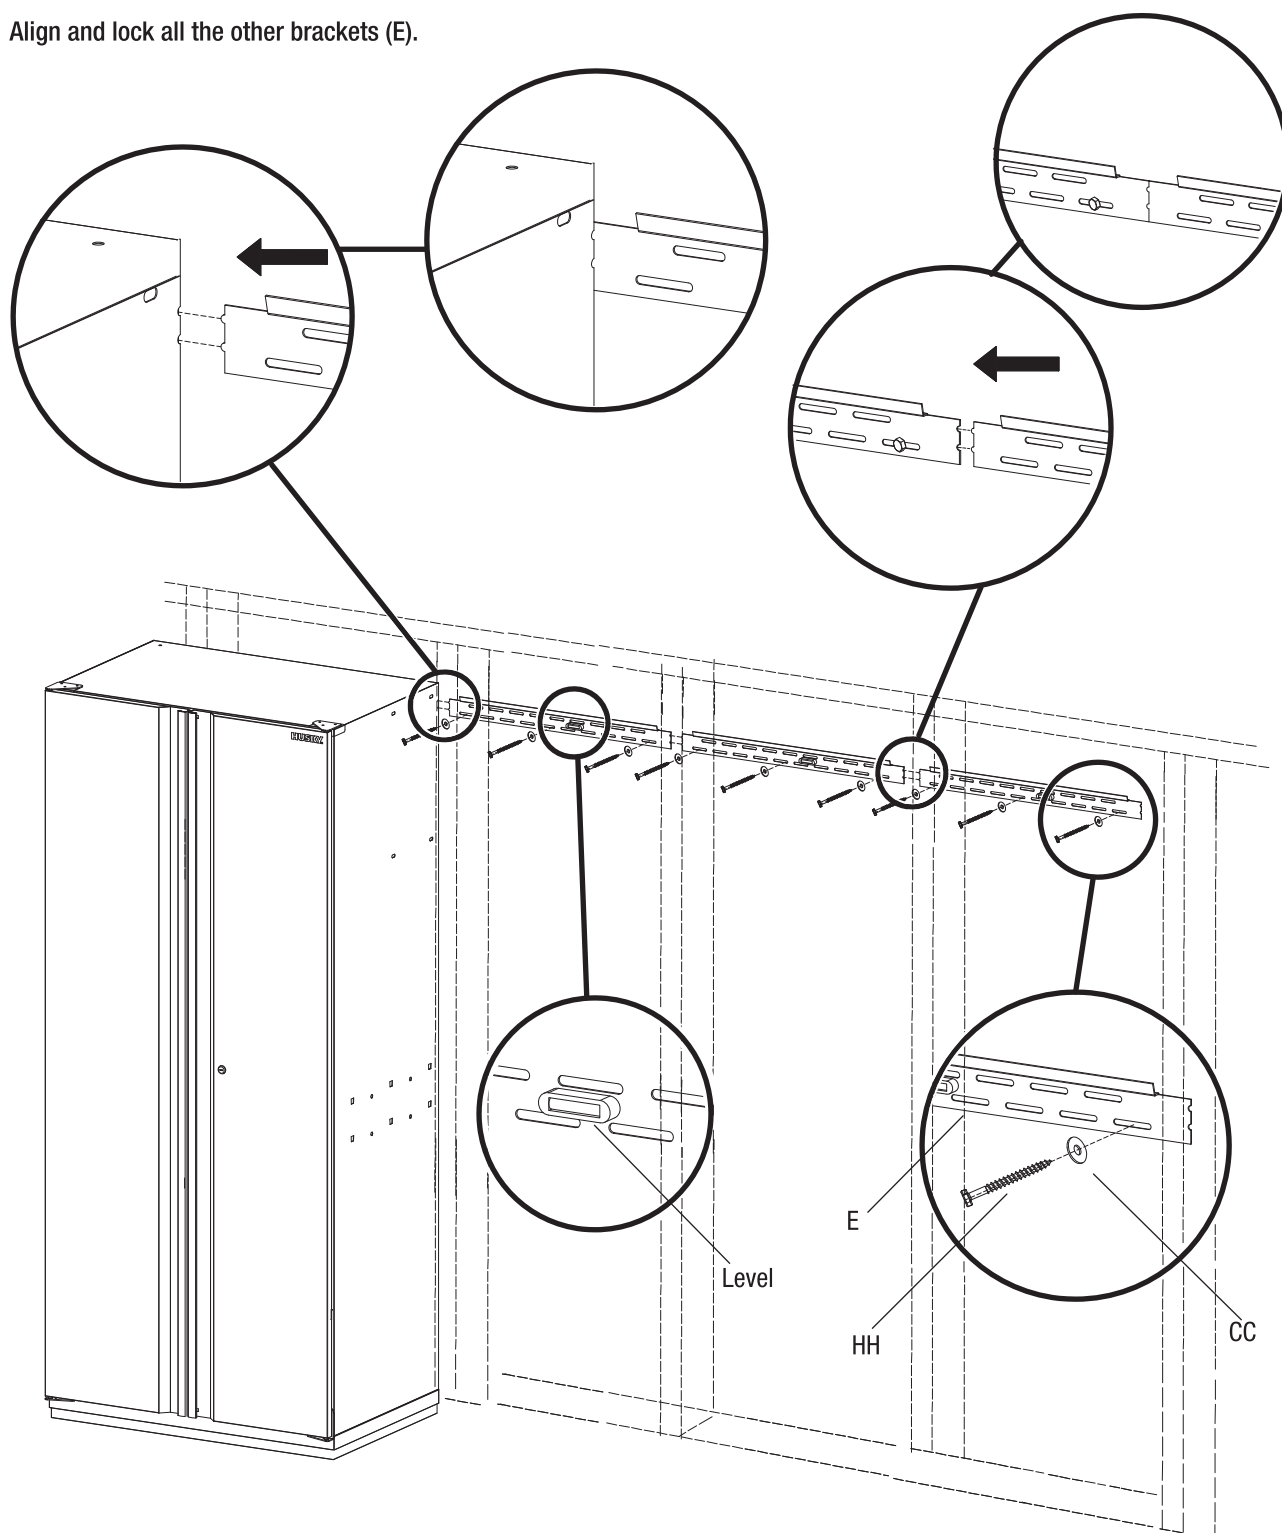

Installing the Wall Cabinet (Continued)

Hanging the Wall Cabinet (2)


- ☐ Hang the wall cabinets (B) onto the bracket (E).

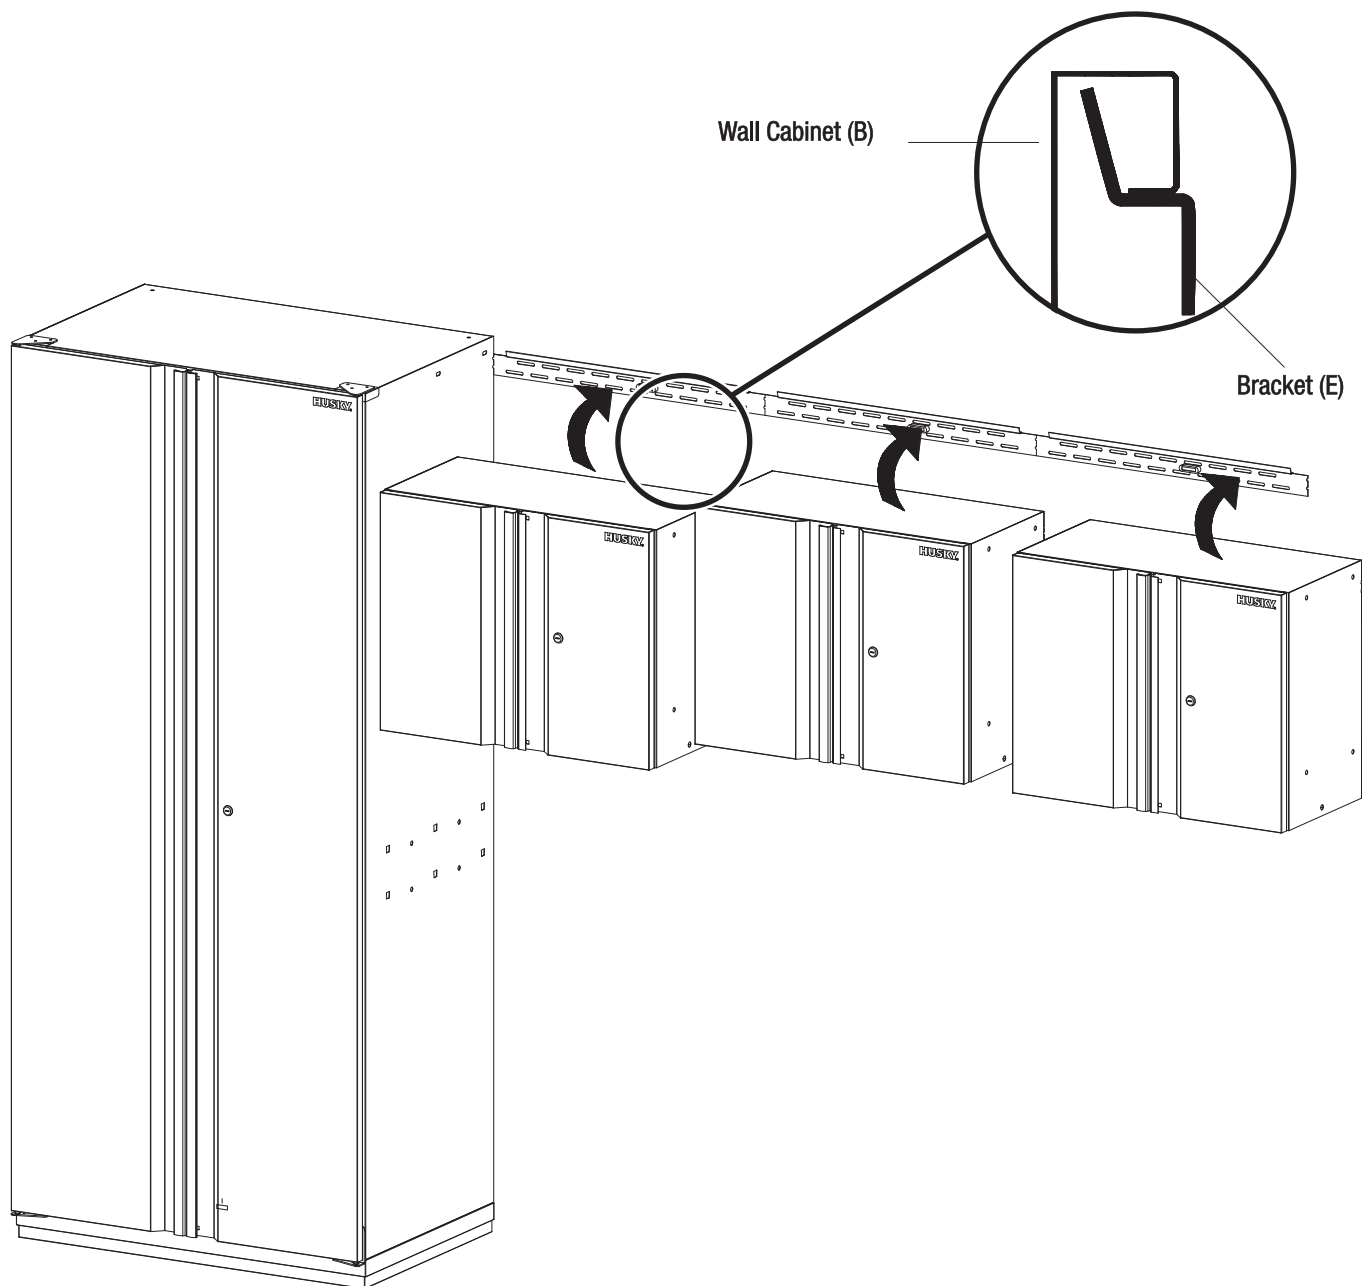

Installing the Wall Cabinet (Continued)

2 Fastening the Cabinets

- ☐ Locate the four cut-off holes on the side panel of the wall cabinet and tall cabinet.
- ☐ Secure the cabinets with four bolts (BB), eight washers (CC) and four nuts (DD).
- ☐ Secure all the other cabinets together.
- ☐ Secure the bottom of the cabinet (B) onto the wall with two wall screws (HH) and two washers (CC).

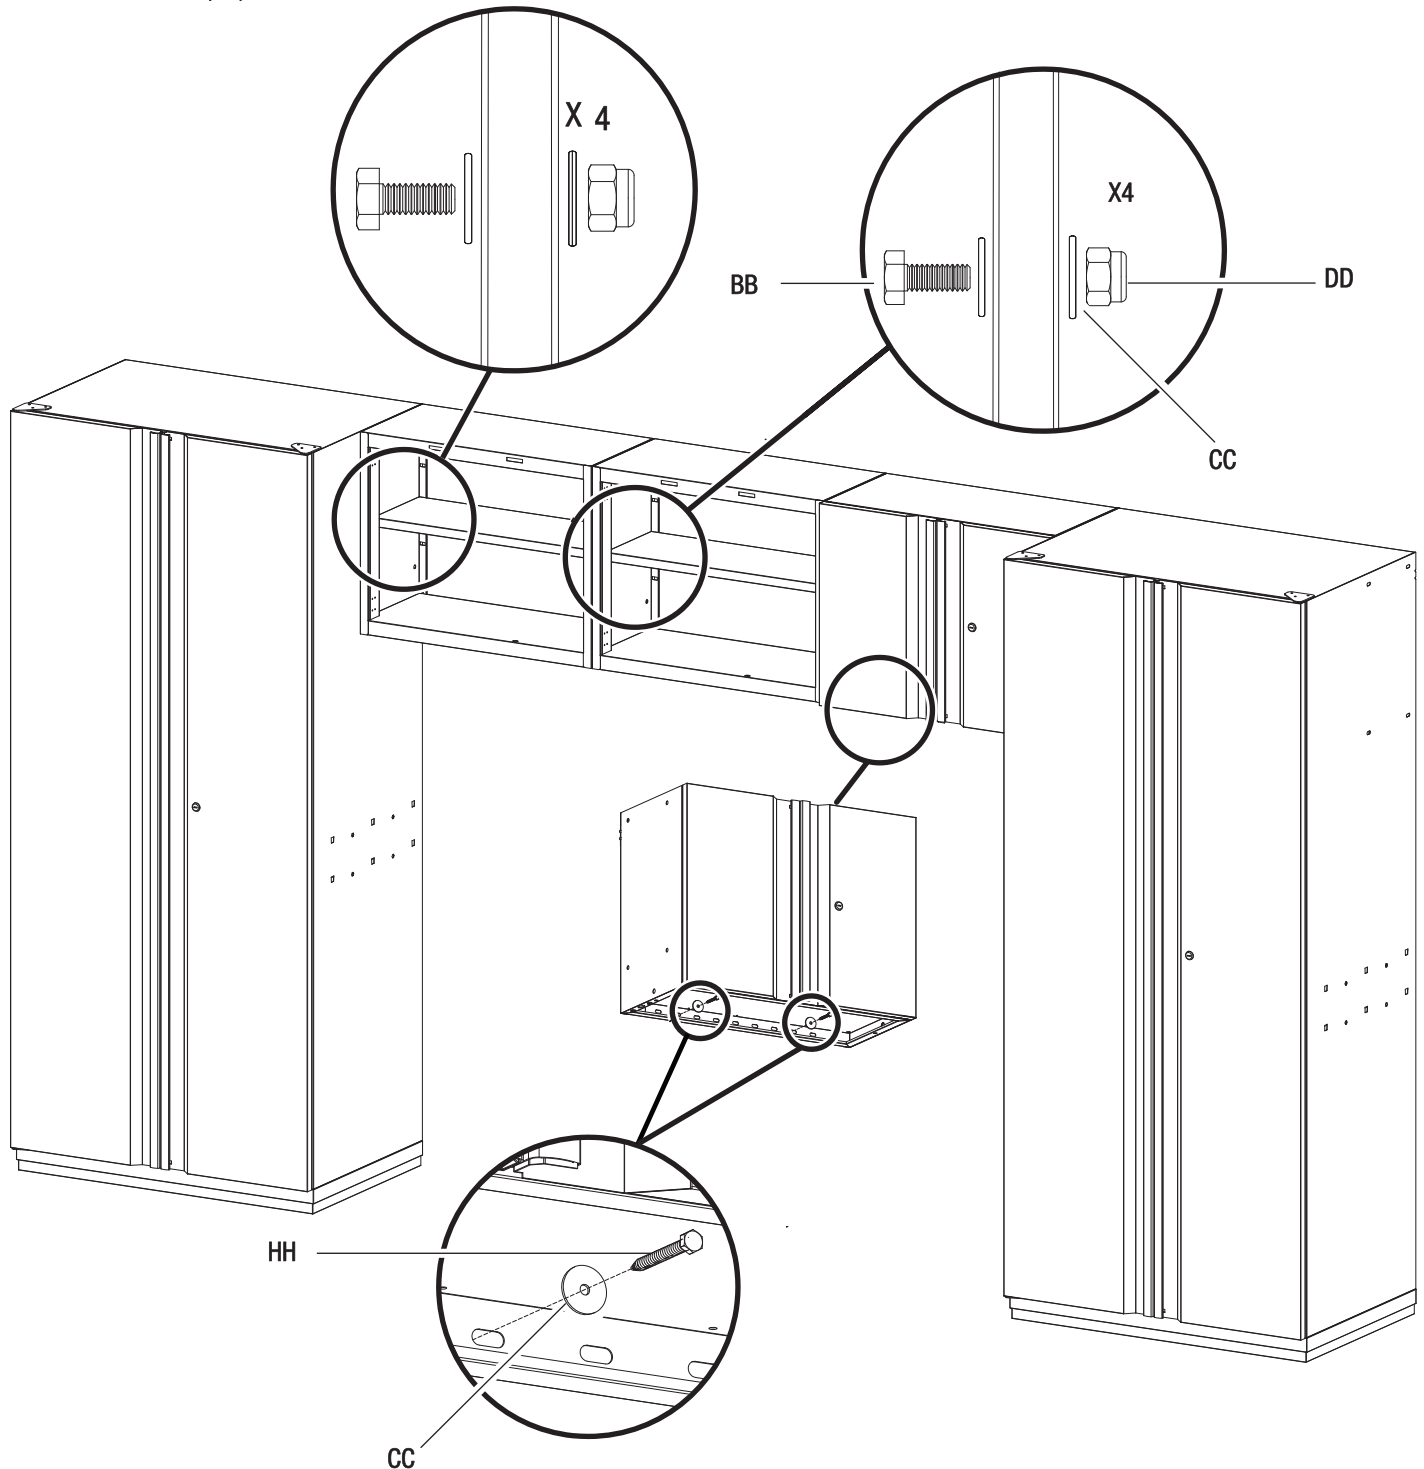


Installing the LED Light (Optional)

1 Connecting the LED Lights

- ☐ There is an interface on each end of the LED light.
- ☐ Connect the LED lights with the connection cables offered.




NOTE: Each LED light comes with magnet on the bottom and can be attached directly on the ferrous surface.

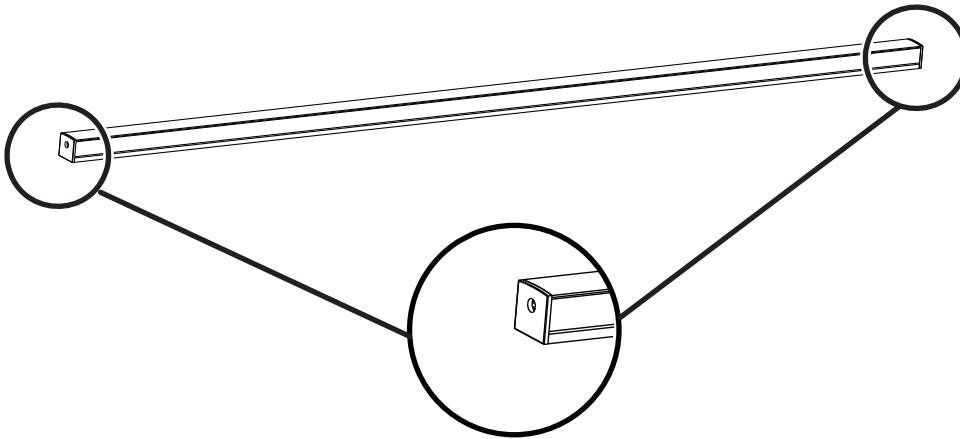

2 Connecting to the Power Supply

- ☐ Connect the LED light to the power adapter.
- ☐ Connect the power adapter to the power outlet using the clamp-on electrical plug.

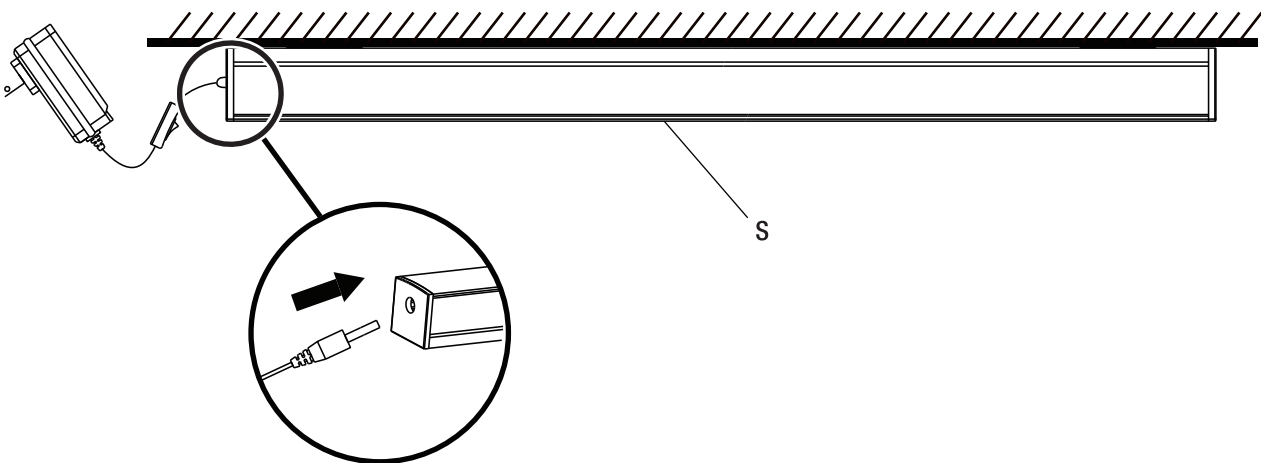

3 Turning the Fixture on/off

- ☐ Use the in-line switch to turn the fixture(s) on and off.
- ☐ All three LEDs are controlled by one switch.




CAUTION: Turn off power to the fixture before attempting to link additional fixtures.

Installing the LED Light (Continued)

4 Installing the LED Light onto the Cabinet

- ☐ Unlock the two screws on the left bottom of the wall cabinet to remove the switch holder.
- ☐ Place the switch of the power adapter (T) inside the holder.
- ☐ Lock the switch holder with the two previously-removed screws.
- ☐ Allow the connection cables (R) to go through the cut-off holes on the bottom side panel of the wall cabinet.
- ☐ Align the LED lights (S) with connection cables (R).

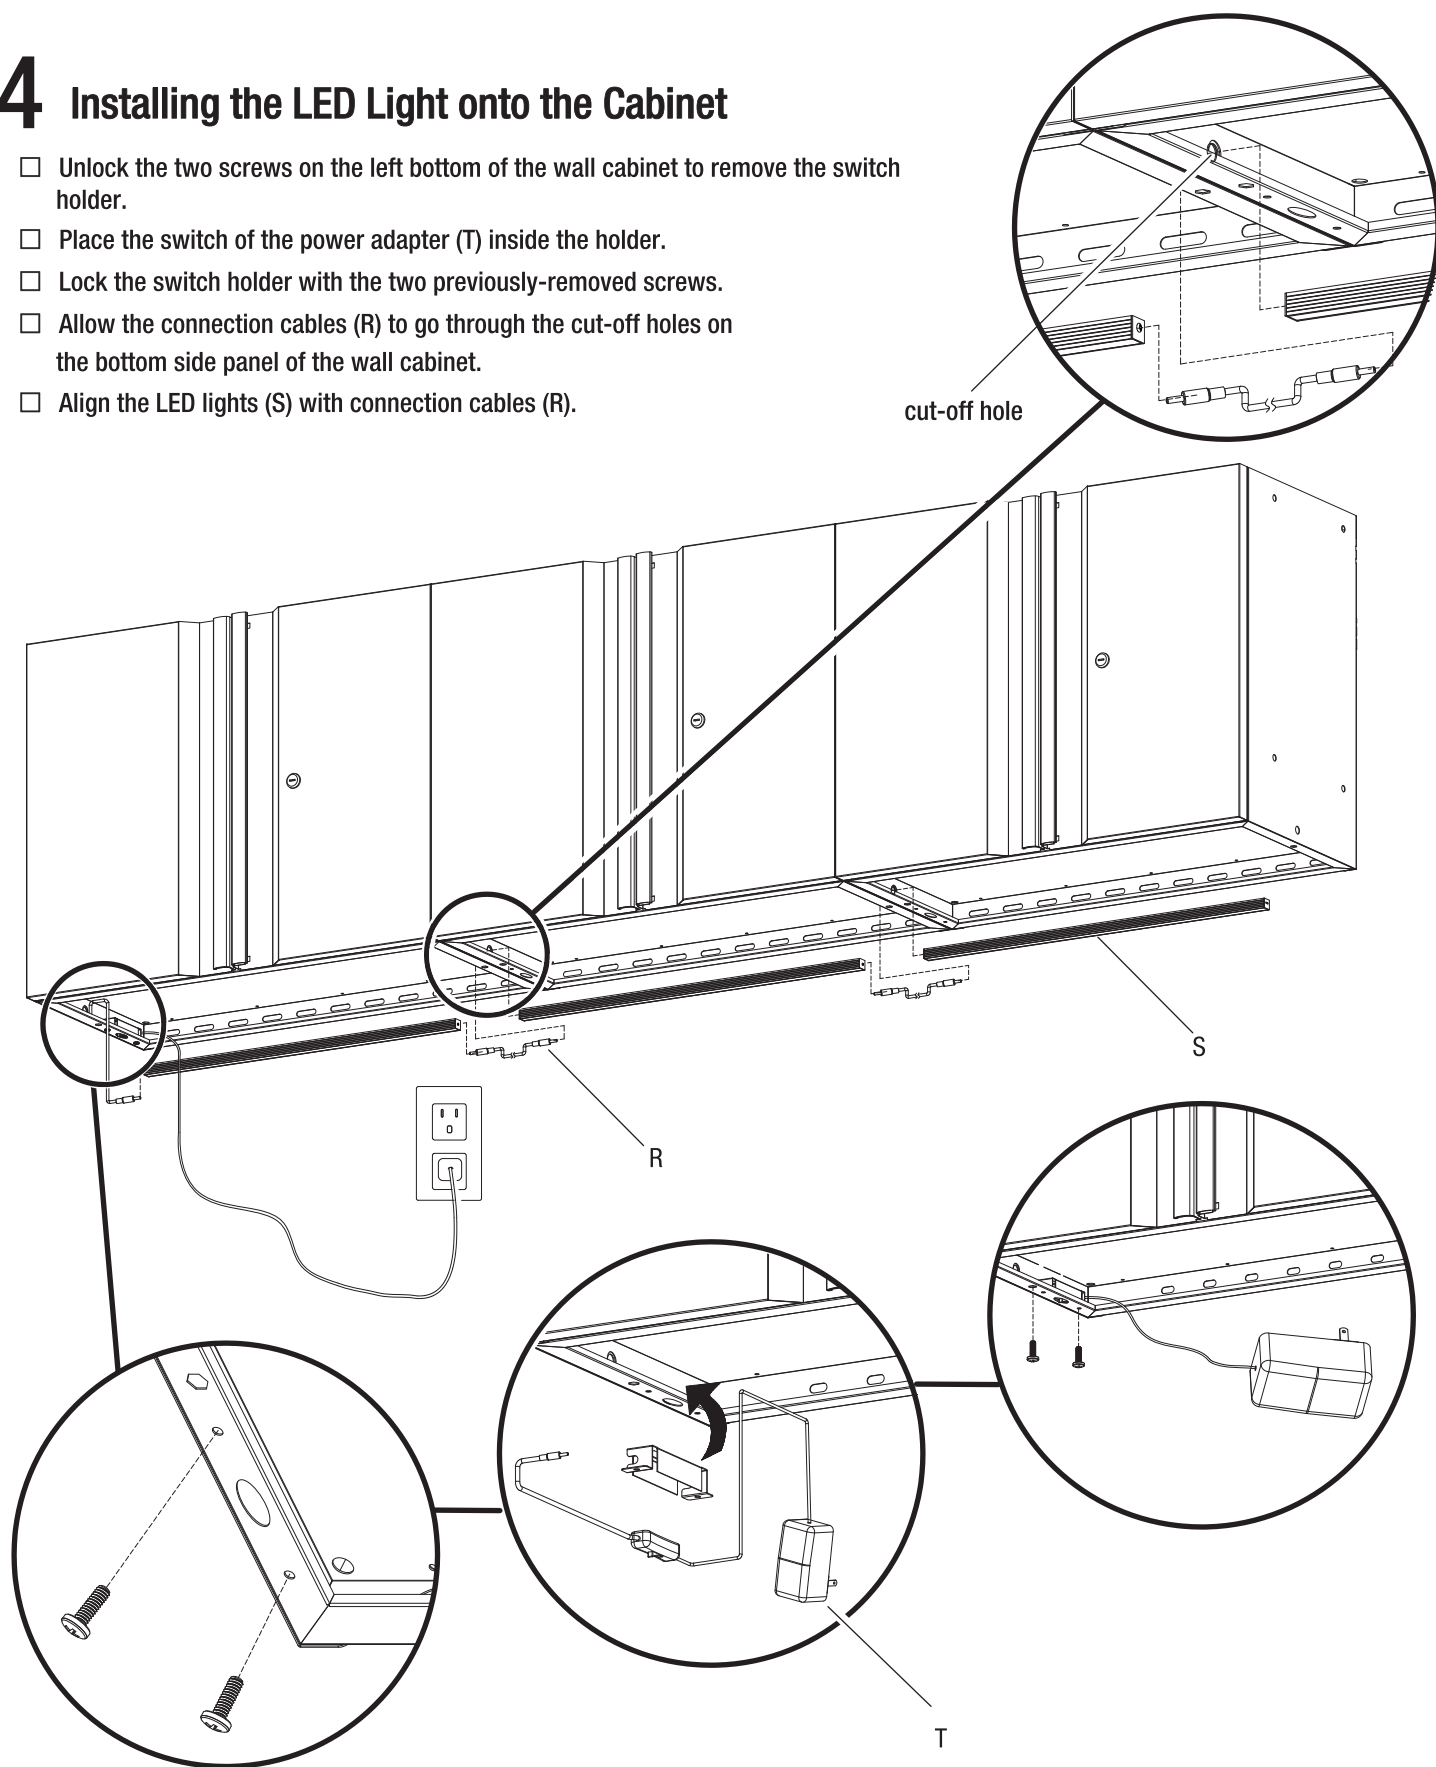


Installing the Work Surface

- ☐ Hook both support brackets (N) into the holes on side panels.
- ☐ Secure both brackets (N) with two bolts (BB) and two washers (CC).
- ☐ Lower the work surface onto the bracket (N).
- ☐ Tighten the work surface onto the bracket (N) with three bolts (BB) and three washers (CC).




NOTICE: There are two rows of perforated holes on the side panel for the tall cabinet for bracket mounting. The top row is for base cabinets with casters, while the bottom row is for base cabinet with feet.

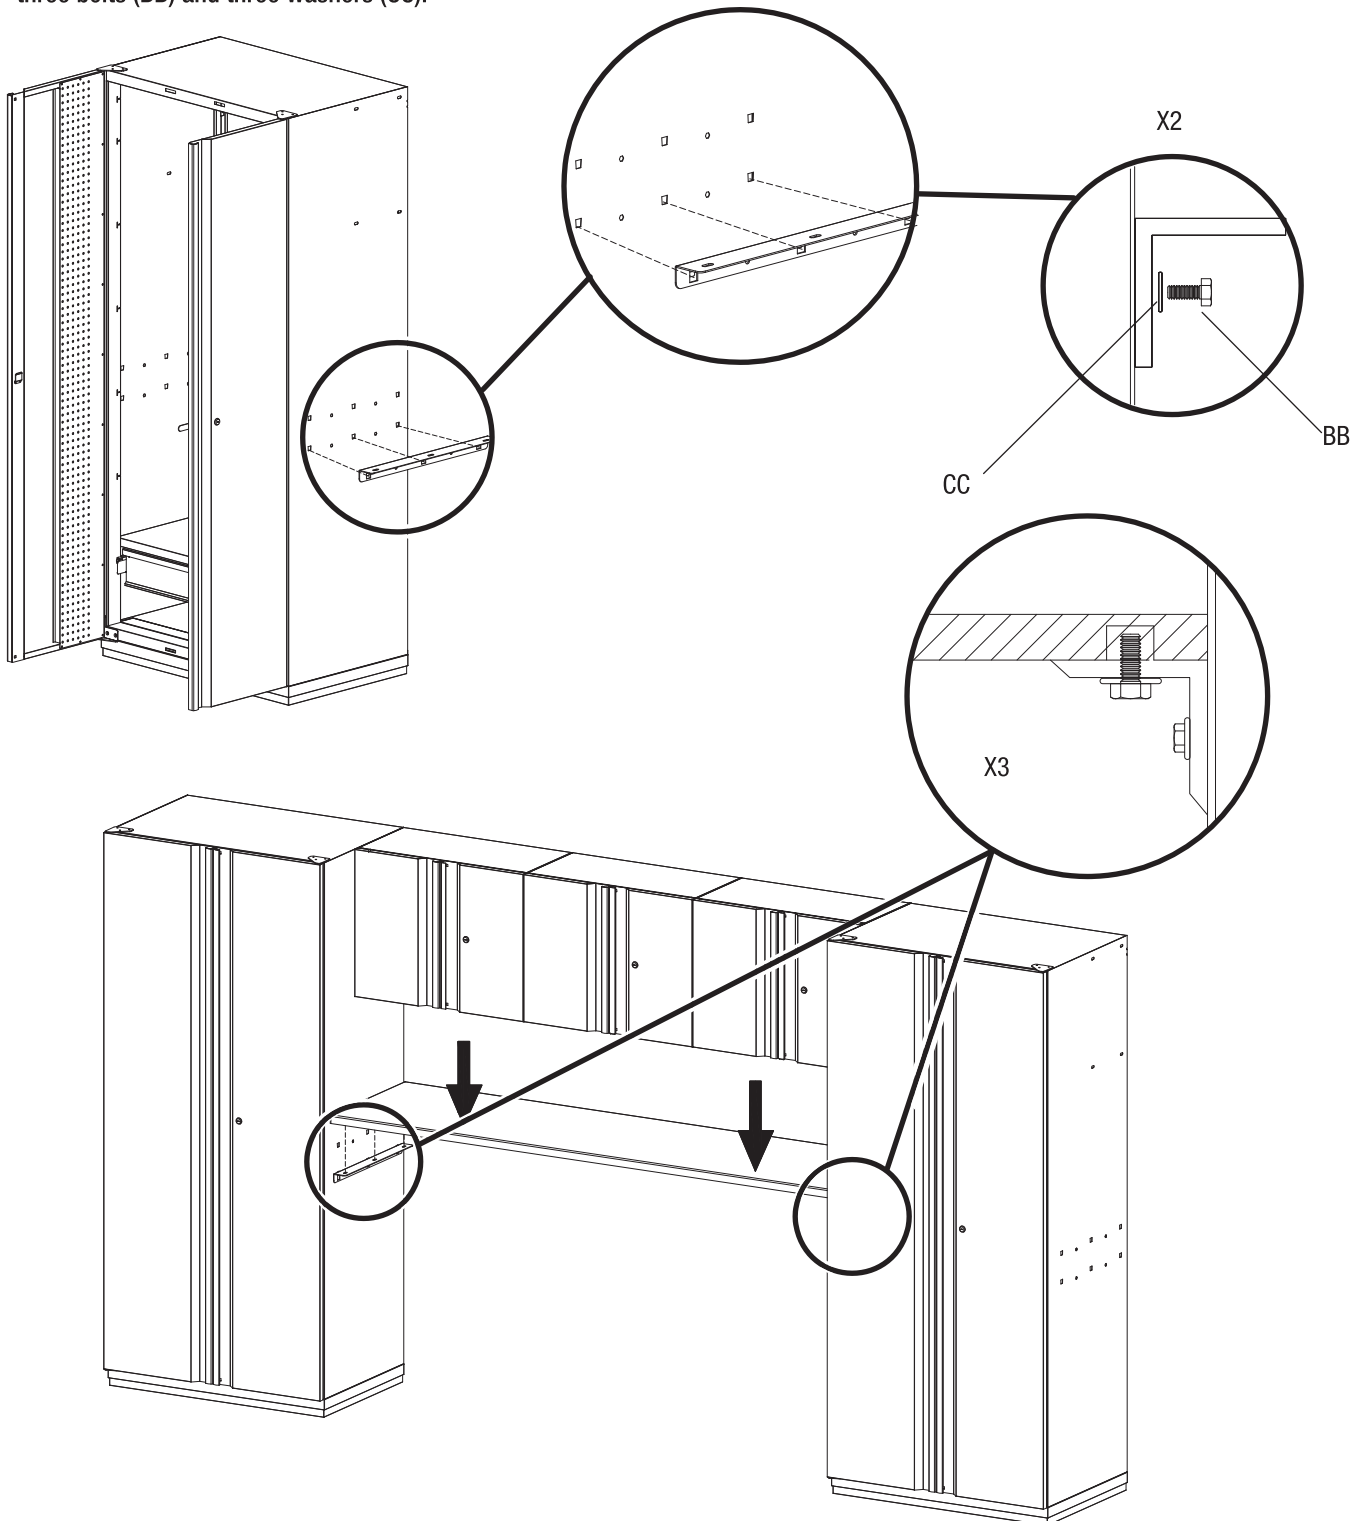


Installing the Workbench

1 Installing the Workbench


- Unfold two legs on one side, and slide the screw bar into the slot on the leg.

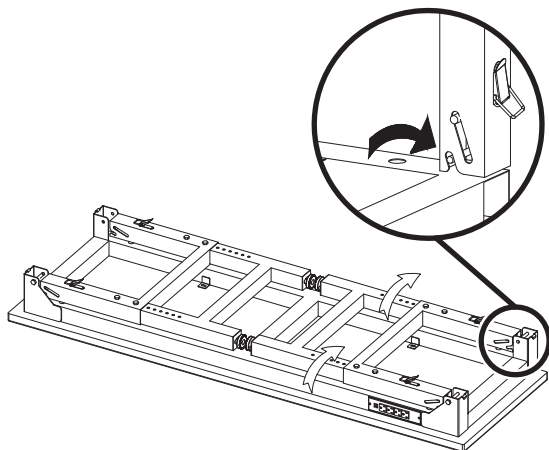


- Locate the buckle on the side of the leg. Hook point (3) and press point (4) to lock the leg with the frame.

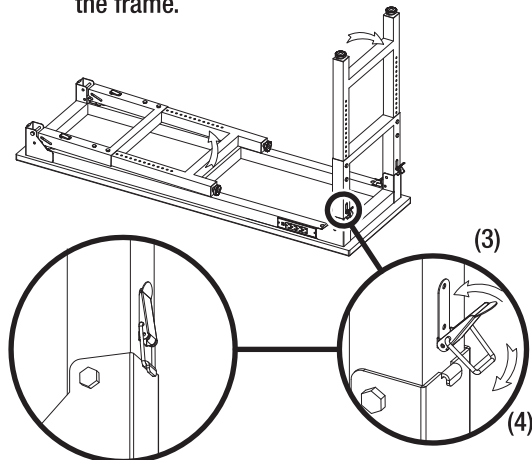


- Repeat step 1 and 2 for other two legs.

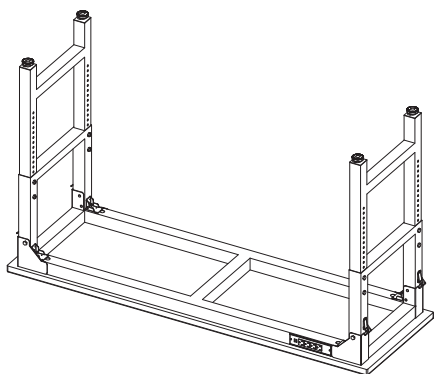

- Flip the workbench up and connect the power strip to the power source.

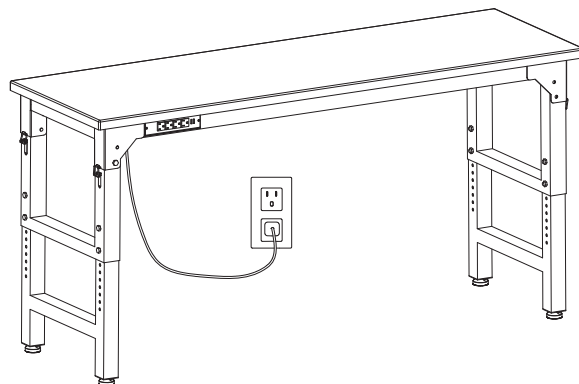

2 Adjusting the Height of Workbench

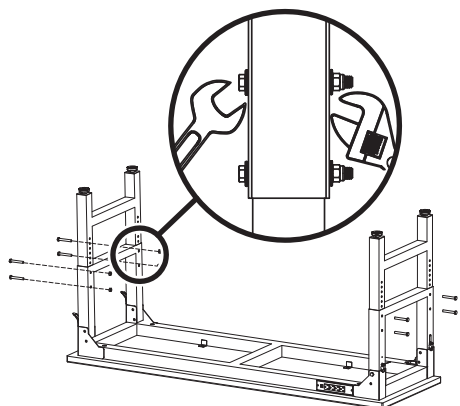






- To adjust the height of the workbench: Remove the screws in the middle of the legs at step 3, adjust the legs at desired height and tighten the screw back.
- The adjustable height ranges from 35 in. to 42 in.

1 Using the Tall Cabinet Catch Plate

- ☐ Slide the latch and pull snap joint.
- ☐ Push and press the catch plate back to the bottom.




NOTE: When opened, the angle between the bottom panel and catch plate is 90°.

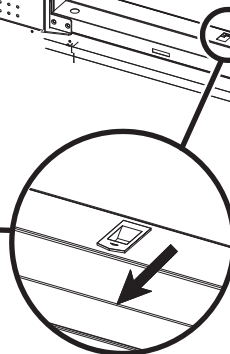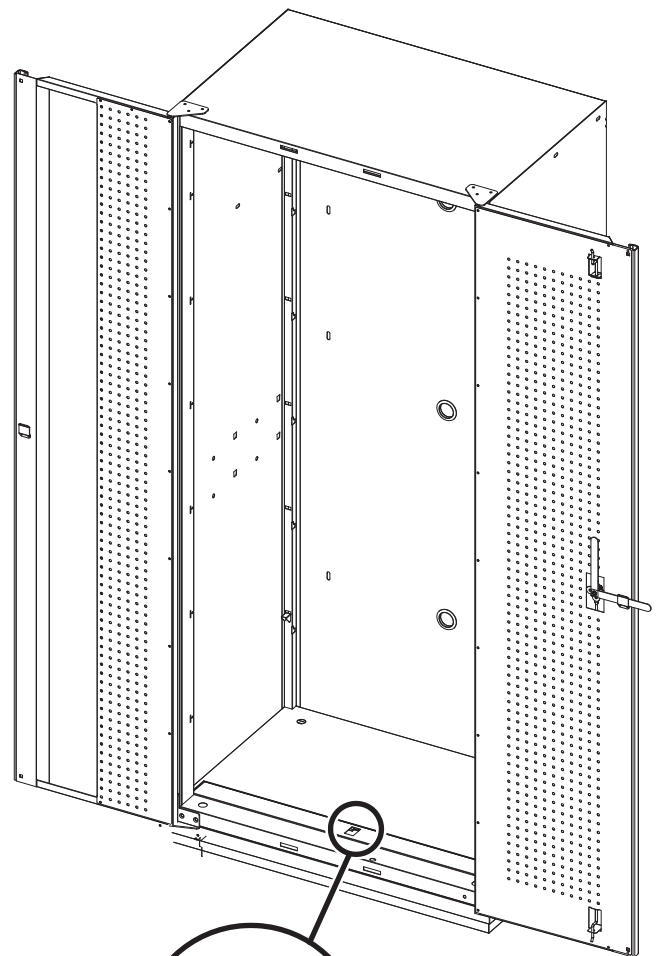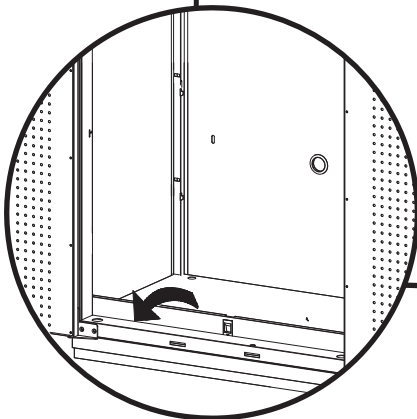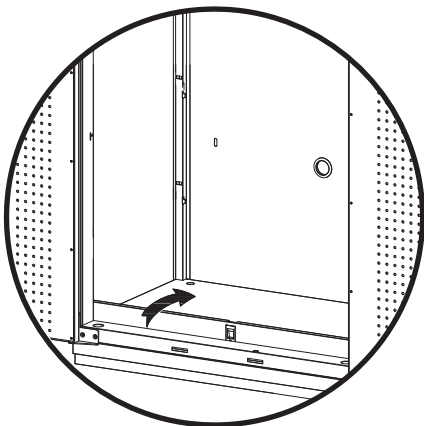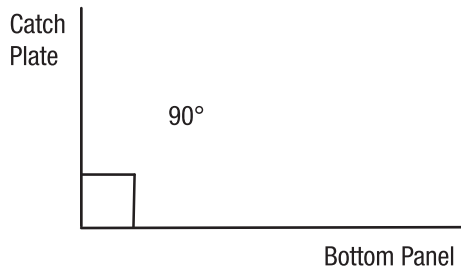


2 Adjusting the Pull Out Drawer in Tall Cabinet

- ☐ Remove the pull out drawer.
- ☐ Switch out the front side of the plate (1) slightly and lift up the rear part (2) to remove the drawer slide.
- ☐ Remove the other drawer slide.

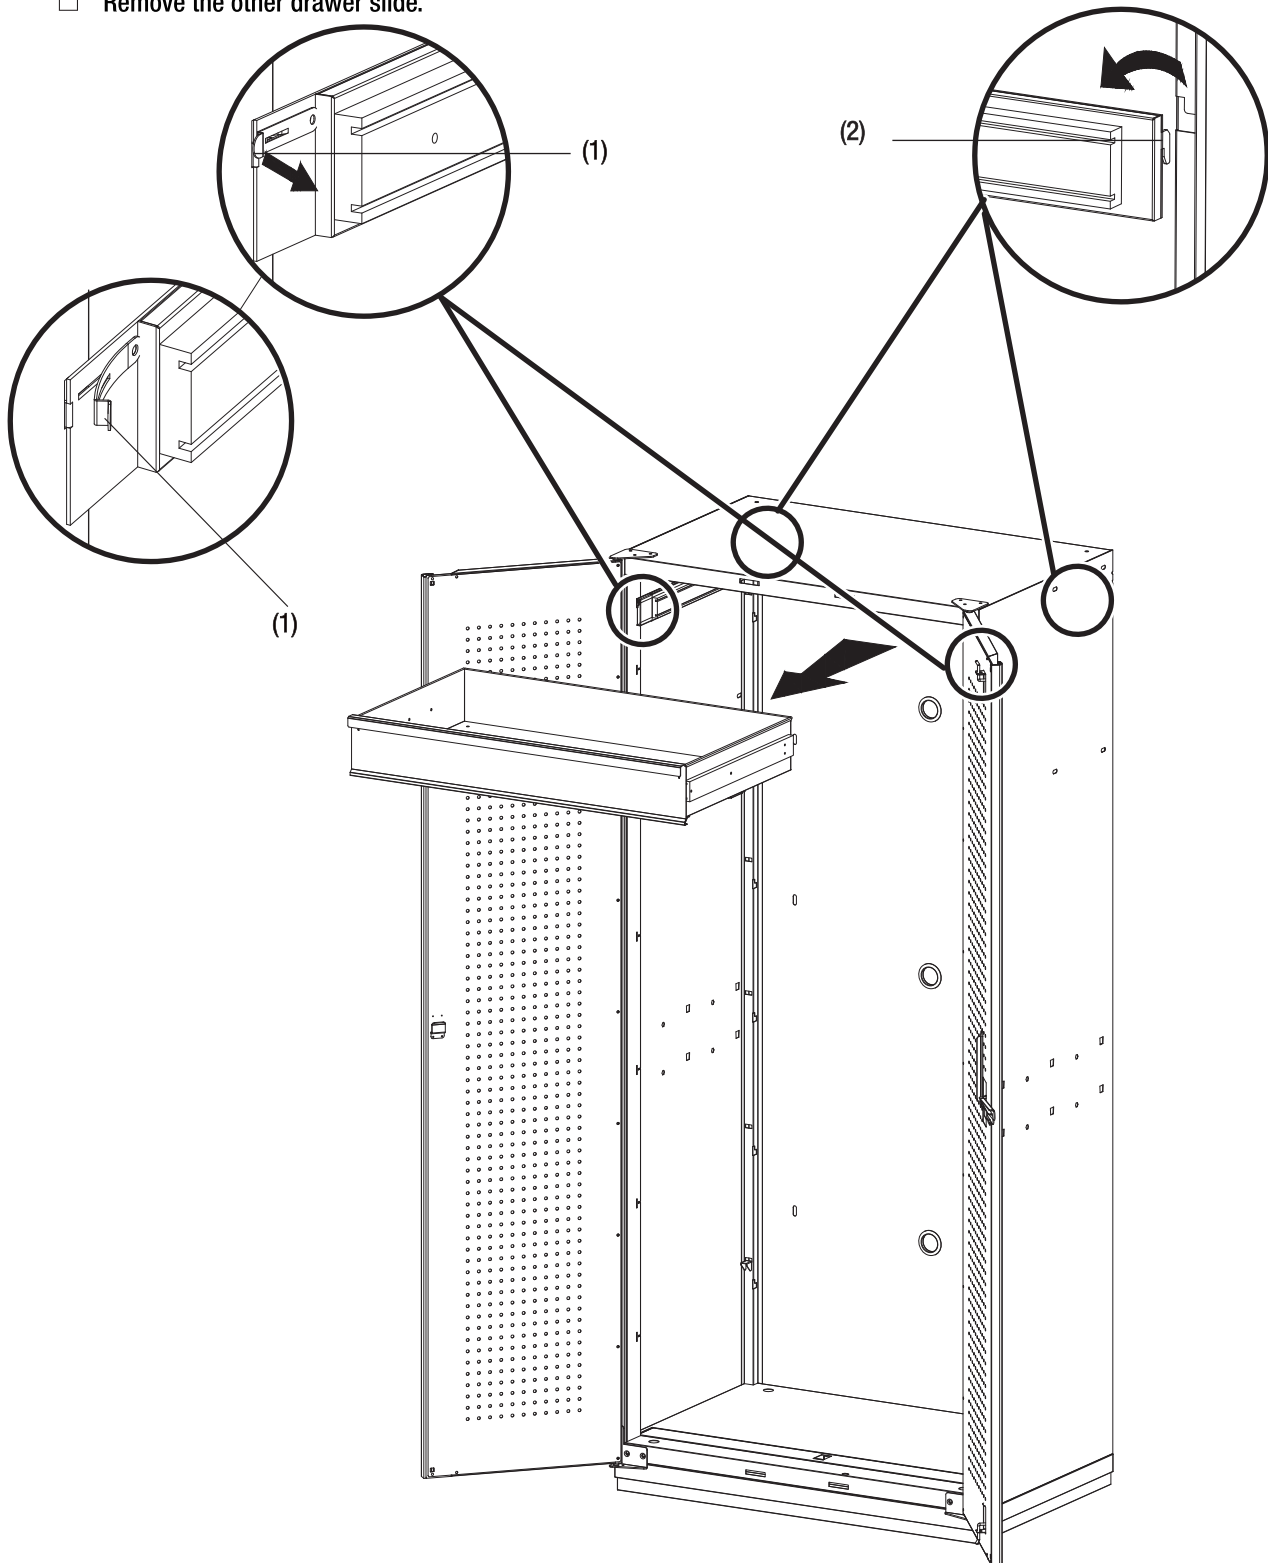




Adjusting the Pull Out Drawer in Tall Cabinet (2)

- ☐ Insert the rear (2) of the drawer slide first, and then insert the front (1) afterwards.
- ☐ Insert the other drawer slide.
- ☐ Install the pull out drawer (J).



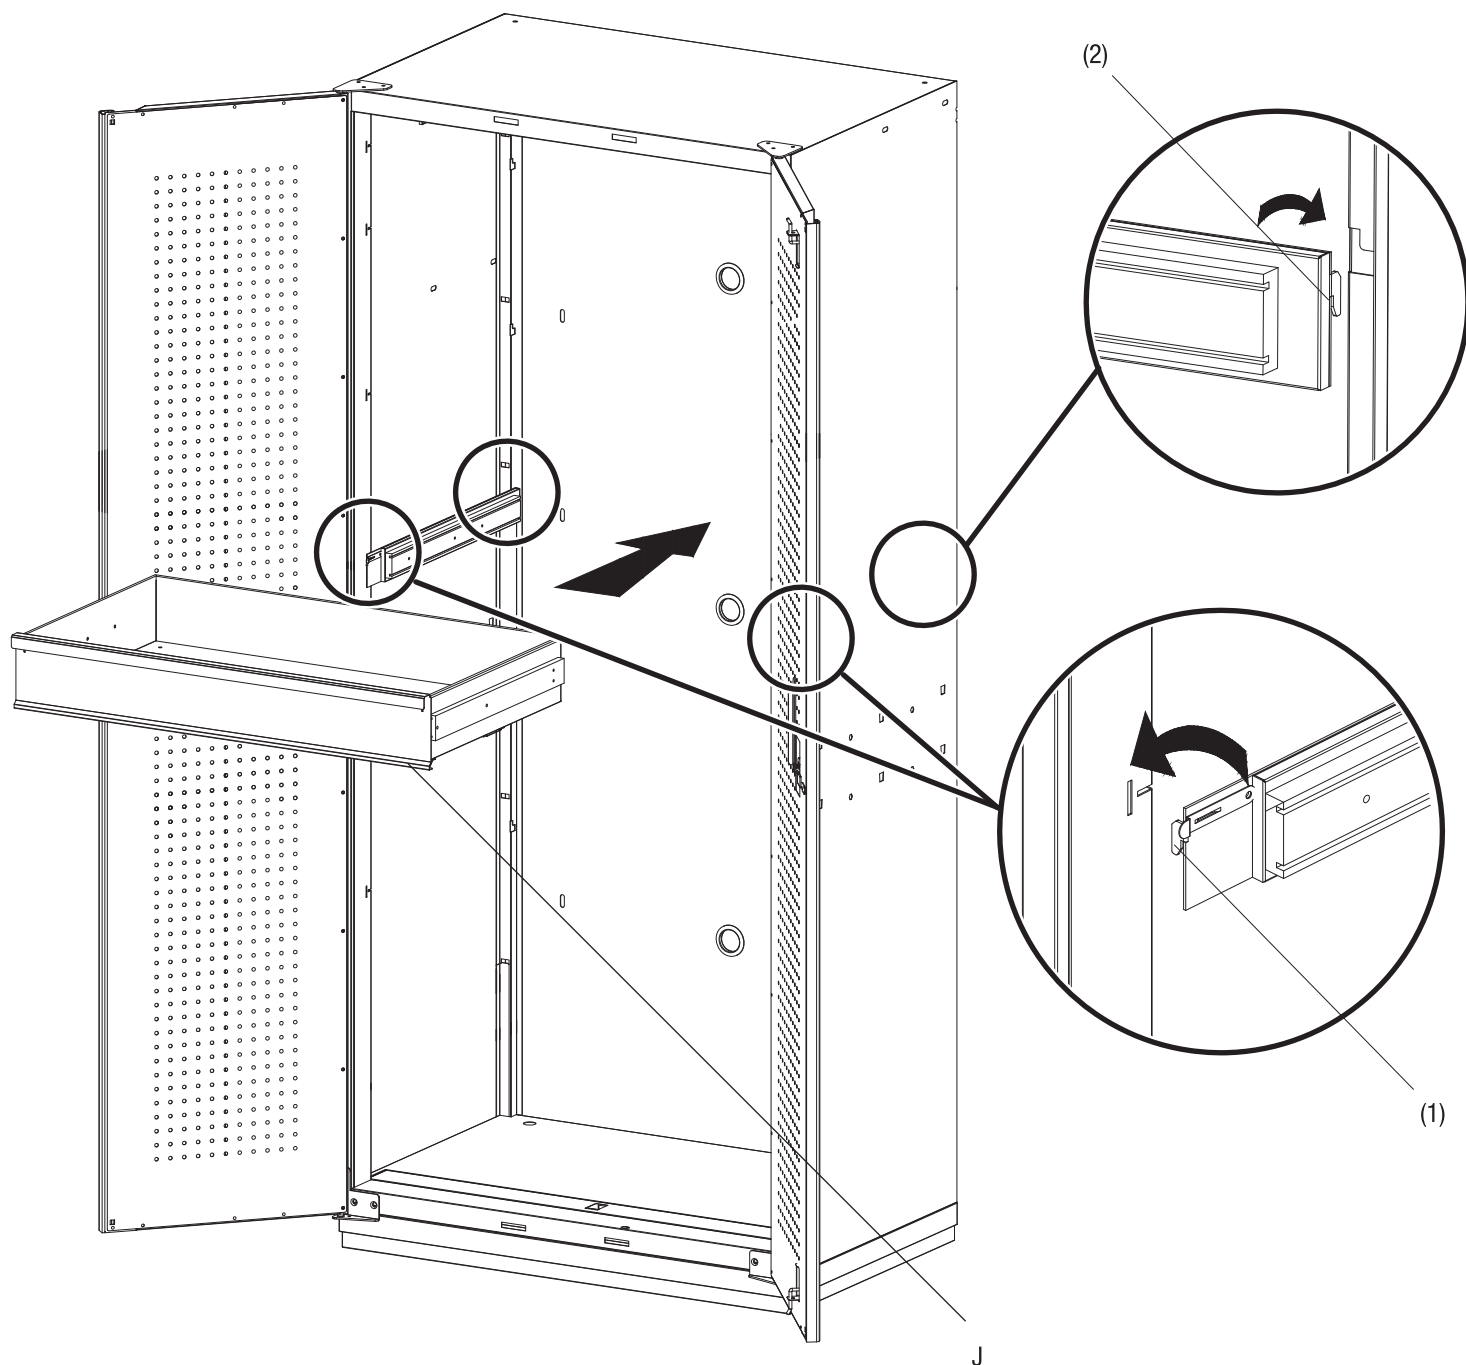


3 Adjusting the Door Hinge

- To adjust the doors in or out from cabinet, turn the screw (5) clockwise or counterclockwise.

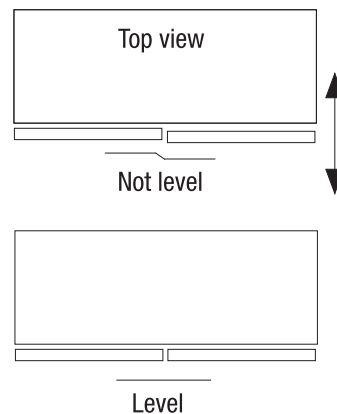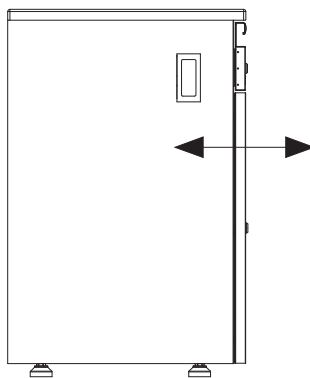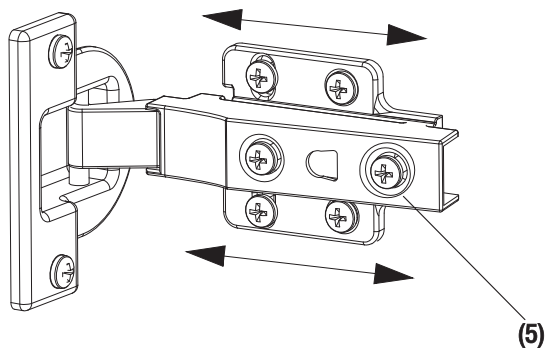


- To adjust the doors left or right, turn the screw (6) clockwise or counterclockwise.

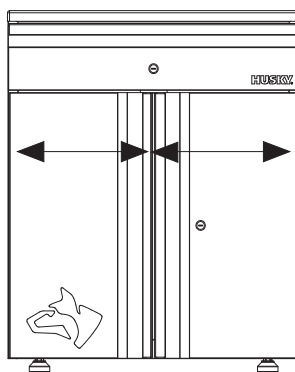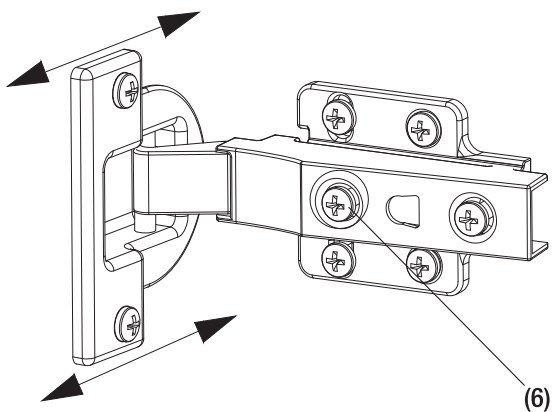

4 Removing the Drawer

- ☐ Empty the drawer, and extend the drawer completely.
- ☐ There are two black plastic levers on each side of the drawer. Pull up the left one while pushing down on the right one.
- ☐ Hold both levers and pull the drawer outward until it is released from the drawer slides.

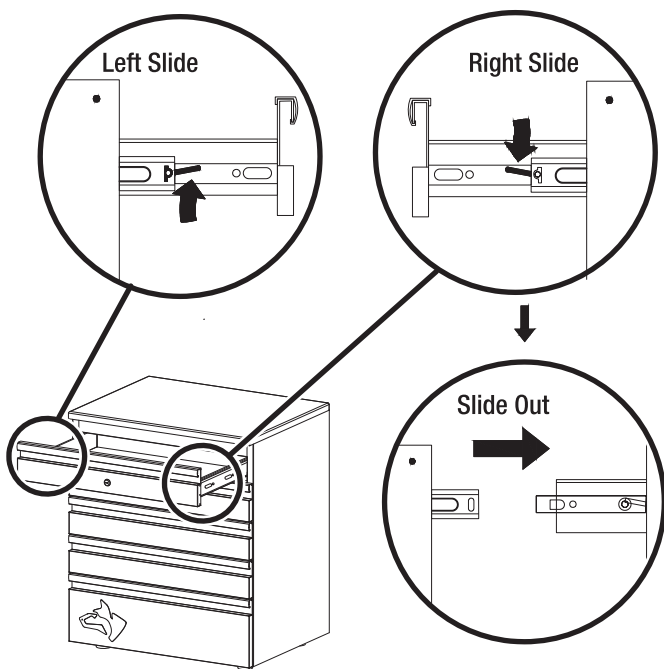


5 Installing the Drawer



- ☐ Extend the drawer slide completely from the cabinet.
- ☐ Align the slide on the drawer with the slide inside the cabinet and make sure both left and right slides are properly positioned.
- ☐ Slide in the drawer and close it completely to finish the installation.



NOTE: DO NOT slide in the drawer violently until both drawer slides are aligned properly or it will cause damage on drawer slide.

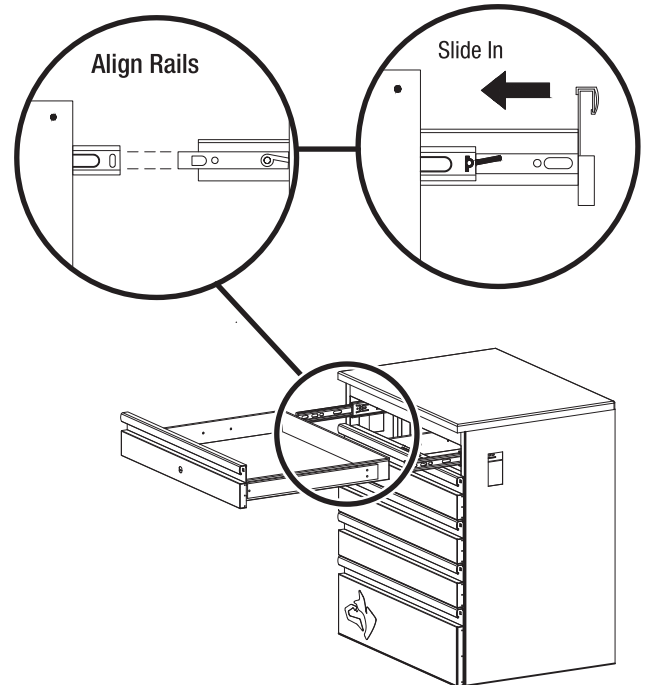

NOTE: The drawer removal and installation for the split cabinet and tall cabinet will be the same as 5 drawer base cabinet.

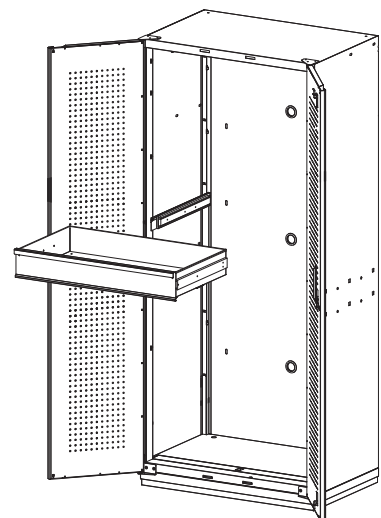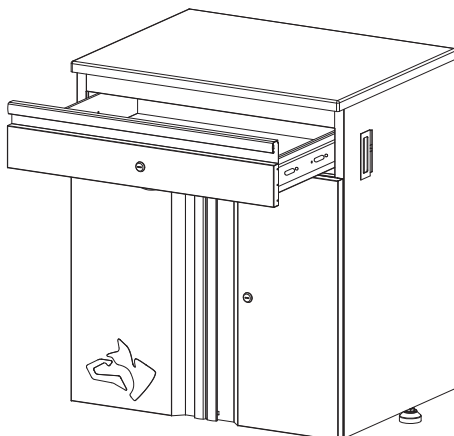

Registration for Power Strip

- ☐ This power strip on the workbench is registered with DOE, and labeled with below DOE registration information.

Furniture Power Distribution Units
Model: BY213-M042
Input: 120V 12A 60HZ
Output: DC 5V 2.1A MAX
Dongguan Baiyou Electronic CO.,Ltd



- ☐ The power strip on the workbench is FCC listed and labeled with below FCC information.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Troubleshooting

Problem	Possible Cause	Solution
Power strip will not charge or turn on.	The power is turned off.	Ensure there is power going to the outlet.
	The cables are not properly connected.	Ensure the power cables are properly connected.
The LED light(s) will not turn on.	The power is turned off.	Ensure there is power going to the outlet.
	The cables are not properly connected.	Ensure all cables are properly connected.
Additional linked fixtures are not turning on.	The connecting wires are not completely plugged in.	Ensure all connectors are completely plugged in.
Cabinets are not leveled.	The floor is not even.	Adjust the feet until the cabinet is leveled.
Doors are not aligned.	The hinge is not adjusted properly.	Adjust the door hinge until the doors are aligned.
The kick plate for tall cabinet is not touching the floor.	The kick plate is stuck.	Move the kick plate up and down to release it so that it can touch the floor.

Care and Cleaning

- ☐ Prior to cleaning, first turn off and unplug all the electrical devices from the power source.
- ☐ Use a dry or slightly dampened, clean cloth to wipe the exterior of the cabinets.
- ☐ Allow the electrical devices to dry completely before connecting to power and operating.
- ☐ Apply lubricating agent on some operative components such as drawer slides and hinges every six months.



Questions, problems, missing parts? Before returning to the store, call Husky
Customer Service

8 a.m. – 7 p.m., EST, Monday-Friday, 9 a.m. – 6 p.m., EST, Saturday

1-888-43-HUSKY

HUSKYTOOLS.COM

Retain this manual for future use.