
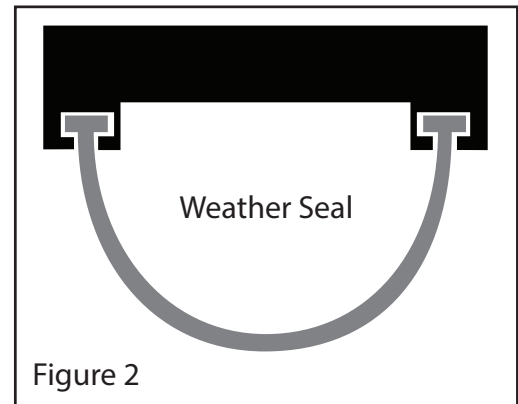


INSTALLATION INSTRUCTIONS

- 1) Unplug your garage door opener and disconnect it from the garage door.
- 2) Secure the garage door in the full open position by placing a C-clamp or vice grip above the top roller to keep the door from moving (**Figure 1**).
- 3) Remove the old seal and clean the track for easy installation of the new seal.
- 4) Insert the full new seal in one end. Once it is fed all the way through, crimp the retainer down on the seal (**Figure 2**).
- 5) On the other end, push 1 inch extra into the track and crimp that retainer.
- 6) Trim the end flush with the door edge.
- 7) Remove the clamps, close the door and reconnect it to the door opener.

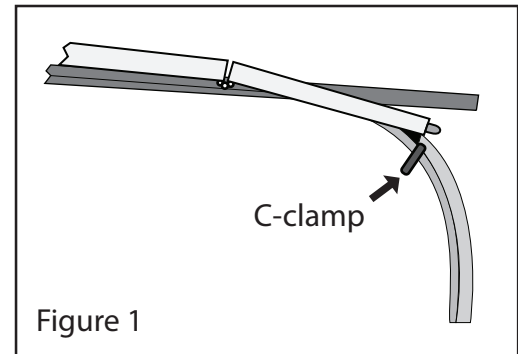

TOOLS NEEDED

C-Clamp and Vice Grips



WARNING!

INSTALLATION BY A TRAINED DOOR SYSTEMS TECHNICIAN IS HIGHLY RECOMMENDED TO PREVENT SERIOUS INJURY OR DEATH.

Springs bottom brackets, red colored fasteners, cables, and supports are under extreme tension and can cause serious injury or death. You should never remove the bottom roller carrier. If your garage door is connected to an automatic opener, be sure to disengage the opener before starting installation. Do not place fingers or hands into door section joint. Use lift handles or gripping points when operating door manually. Never use other objects to prop open the door. If complications during installation occur, contact a trained door systems technician for service.