

# LANDSCAPE LIGHTING

## LOW VOLTAGE

### APPLICATIONS Suitable for use as follows:

- Outdoor Accent Lighting
- Landscape Lighting
- Security Lighting
- Sunlight Resistant
- Direct Burial

### CONSTRUCTION


- **Conductors:** Two fully annealed bare stranded copper conductors
- **Insulation/Jacket:** Premium-grade PVC -20°C to +60°C
- **Final assembly:** Insulated/Jacketed conductors duplexed in a flat construction for easy tear-down during installation
- **Color:** Black is standard  
Available in white or brown, but subject to minimum order quantity

### STANDARDS & REFERENCES

- Meets or exceeds UL and cUL standards

### WEIGHTS, MEASUREMENTS AND PACKAGING

CONDUCTOR SIZE (AWG)	CONDUCTOR STRANDING (#/AWG)	NOMINAL OVERALL DIAMETER (inch)	NOMINAL JACKET THICKNESS (inch)	APPROX. WEIGHT (lbs/1000 ft)	PUT-UP (feet)
16/2	26/30	0.156 × 0.307	0.048	41	250
14/2	41/30	0.166 × 0.341	0.046	55	250
12/2	65/30	0.186 × 0.37	0.047	69	250
10/2	104/30	0.205 × 0.405	0.047	107	250
8/2	7 × 24/30	0.27 × 0.53	0.062	163	250

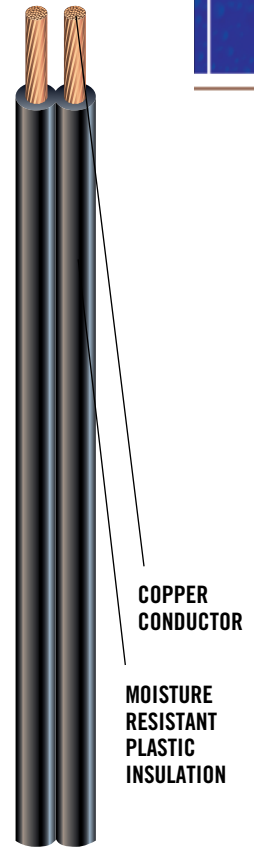

LOW VOLTAGE TYPE UF /  
LANDSCAPE LIGHTING

Landscape Lighting

Rated 150 Volts

Rated -20°C to +60°C

Approved for Outdoor Use (Sunlight Resistant)  
Suitable for Direct Burial

Stranded Copper Conductor

Black PVC Insulation/Jacket



RoHS Compliant