


For Manufacturing Date Before June 1st, 2019

407943K50 Dimmers (Require neutral wire connection)

Brand	Type	Series	Model #	Wiring	watts	dimming method	Notes
Lutron	ELV	Maestro	MAELV-600	Single-pole/multi-location	600	Digital	Multi-locations only work with MA-R (not a dimmer)
	ELV	Skylark	SELV-303P	Single-pole/3-way	300	slide with ON/OFF button	3-Way only works with a 3-Way switch
	Reverse Phase	Diva	DVRP-253P	Single-pole/3-way	250	slide with ON/OFF button	3-Way only works with a 3-Way switch
	Reverse Phase	Nova T	NTRP 250	Single Pole	250	slide to off	
	Reverse Phase	Skylark Contour	CTRP-253P	Single-pole/3-way	250	slide with ON/OFF button	3-Way only works with a 3-Way switch
Leviton	ELV	decora	DES06-1	Single-pole/3-way	300	slide with ON/OFF button	3-Way only works with a 3-Way switch

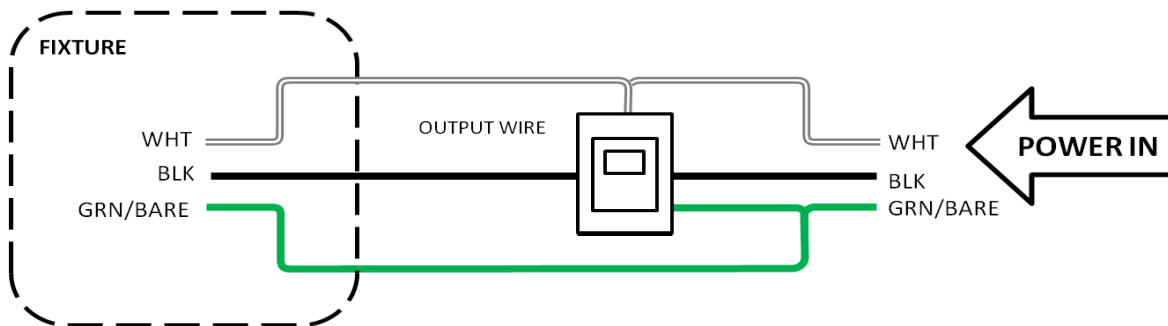

For Manufacturing Date After June 1, 2019

407943K50 Dimmers										
Brand	Type	Series	Model #	Wiring	watts	dimming method	Version Code	Max # of Luminaires	Notes	minimum dimming range
Lutron	C.L	Ariadni/Toggler C.L	AYCL-153P	Single-pole/3-way	150	Toggler	T8, T9	14	3-Way only works with a 3-Way switch	3%
			TGCL-153P							
			Diva C.L			DVCL-153P				
			Skylark C.L			SCL-153P				
			Skylark Contour C.L			CTCL-153P				
		Lumea C.L	LGCL-153P							
		Maestro C.L	MACL-153M	Single-pole/3-way/ multi-location	150	Digital	2014	14	3-Way only works with a 3-Way switch or dimmer companion MA-R (not a dimmer). Multi-location only work with MA-R	3%
			MSCL-VP153M	Single-pole/3-way/ multi-location	150	Digital/Vacancy Sensor	T2	14	3-Way only works with a 3-Way switch or dimmer companion MA-R (not a dimmer). Multi-location only work with MA-R	3%
			MSCL-OP153M			Digital/Occupancy Sensor				
			MRF2-6CL	Single-pole/3-way/ multi-location	150	Digital and Wireless	M6	14	3-Way or multi-location only works with companion MA-R (not a dimmer)	3%
	Nova T	NTCL-250	Single-pole	250	slide to off	BR Y02	23		3%	
	Grafik T	GT-150	Single-pole/3-way/ multi-location	150	Digital	T6	14	3-Way or multi-location only works with companion GT-AD (not a dimmer)	3%	
RF C.L	Grafik T RF	GTJ 150				M6			3%	
	Wireless	Caseta	PD-6WCL	Single-pole or multi-location	150	Digital and Wireless,	SD11	14	Multi-location only works with Pico wireless remote PJ2, amazon alexa, Google Assistant, Apple HomeKit, Apple Watch	0%
Leviton	Universal Dimmer	Decora	DSL06-1L	Single-pole/3-Way	300	slide with ON/OFF button	NA	28	3-Way only works with a 3-Way switch	3%
		Illuma Tech	IPL06-10	Single-pole/3-Way	150	slide with ON/OFF button	NA	14	3-Way only works with a 3-Way switch	3%
		Sureslide	6672-1L	single	150	slide to off	NA	14		3%
		Sureslide	6674-P0	Single-pole/3-Way	150	slide with ON/OFF button	NA	14	3-Way only works with a 3-Way switch	4%
		Renu	REL06	Single-pole/3-Way	300	Digital	NA	28	3-Way only works with remote RE00R Requires neutral wire connection	3%
		Decora Digital	DDMX1-BL	Single-pole/3-Way	450	Digital or Bluetooth	NA	43	3-Way only works with remote DDOOR-DL Requires neutral wire connection	3%

