

Under Cabinet Lighting

Linkable Beam Adjustable Under Cabinet Lights




Dim2Warm
Under Cabinet Light
Transitions from 3000K to 2200K when dimmed

ETI ADVANTAGE



- ✓ Beam is adjustable by up to 90°
- ✓ MAGNA MOUNT™ mounting plate makes cabinet installation quick and easy
- ✓ 120V direct wire or plug in connection
- ✓ 2-way linkable

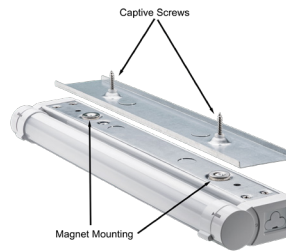

Direct Link



Cable Link



DIM2WARM MODELS

Features & Specifications

- Durable impact resistant lens • 120V • >90CRI • TRIAC Dimmable • Temp rating -4°F-113°F
- L70 >50,000 • 5 year limited warranty

12" Dim2Warm®
5.5w 300 Lumen
UC-12-5-930-SV-D
53502111

18" Dim2Warm®
9w 500 Lumen
UC-18-9-930-SV-D
53503111

24" Dim2Warm®
12.5w 300 Lumen
UC-24-12-930-SV-D
53504111

32" Dim2Warm®
15w 1000 Lumen
UC-32-10-930-SV-D
53505111

42" Dim2Warm®
22w 1500 Lumen
UC-42-22-930-SV-D
53506111

Part #	Model #	Description	Replaces	LED Watts	Lumens	LPW	CCT	Product Dimensions	CRI	Input Voltage	Case Pack
UC-12-5-930-SV-D	53502111	12" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	35w	5.5w	300	55	3000K-2200K	12 x 1.1 x 2.4 in.	90	120V	5
UC-18-9-930-SV-D	53503111	18" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	40w	9w	500	56	3000K-2200K	17.9 x 1.1 x 2.4 in.	90	120V	5
UC-24-12-930-SV-D	53504111	24" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	60w	12.5w	700	56	3000K-2200K	23.9 x 1.1 x 2.4 in.	90	120V	5
UC-32-10-930-SV-D	53505111	32" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	75w	15w	1,000	67	3000K-2200K	32 x 2.4 x 3.9 in.	90	120V	5
UC-42-15-930-SV-D	53506111	42" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	100w	22w	1,500	68	3000K-2200K	42 x 2.4 x 3.9 in.	90	120V	5

PART NUMBER GUIDE

CATEGORY	SIZE	LUMENS	CRI/CCT	VOLTAGE	DIMMING	OPTION
				SV		

PRODUCT/SKU DETAILS


GENERAL SPECIFICATIONS:

Voltage	120VAC	Frequency	50/60 Hz.	CRI	90
Power Factor	>.90	THD	< 20%	Rating	cULus Wet
Temperature	-4°F to +113°F	Rated Life	50,000 hrs.	Warranty	5 Year Limited

ALL UNDER CABINET MODELS

Part #	Model #	Description	Replaces	LED Watts	Lumens	LPW	CCT	Product Dimensions	CRI	Input Voltage	Case Pack
UC-12-5-930-SV-D	53502111	12" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	35w	5.5w	300	55	3000K-2200K	12 x 1.1 x 2.4 in.	90	120V	5
UC-18-9-930-SV-D	53503111	18" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	40w	9w	500	56	3000K-2200K	17.9 x 1.1 x 2.4 in.	90	120V	5
UC-24-12-930-SV-D	53504111	24" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	60w	12.5w	700	56	3000K-2200K	23.9 x 1.1 x 2.4 in.	90	120V	5
UC-32-10-930-SV-D	53505111	32" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	75w	15w	1,000	67	3000K-2200K	32 x 2.4 x 3.9 in.	90	120V	5
UC-42-15-930-SV-D	53506111	42" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	100w	22w	1,500	68	3000K-2200K	42 x 2.4 x 3.9 in.	90	120V	5
UC-12-6-830-SV*	54196112	12" Linkable Under Cabinet Light w/ Step Dimming Switch	35w	6w	350	58	3000K	12 x 0.9 x 1.7 in.	80	120V	5
UC-18-8-830-SV*	54195112	18" Linkable Under Cabinet Light w/ Step Dimming Switch	40w	8w	500	63	3000K	17.9 x 0.9 x 1.7 in.	80	120V	5
UC-24-11-830-SV*	54194112	24" Linkable Under Cabinet Light w/ Step Dimming Switch	60w	11w	700	64	3000K	23.9 x 0.9 x 1.7 in.	80	120V	5
UC-12-5-930-SV-D	53502111	12" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	35w	5.5w	300	55	3000K-2200K	12 x 1.1 x 2.4 in.	90	120V	5
UC-18-9-930-SV-D	53503111	18" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	40w	9w	500	56	3000K-2200K	17.9 x 1.1 x 2.4 in.	90	120V	5
UC-24-12-930-SV-D	53504111	24" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	60w	12.5w	700	56	3000K-2200K	23.9 x 1.1 x 2.4 in.	90	120V	5
UC-32-10-930-SV-D	53505111	32" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	75w	15w	1,000	67	3000K-2200K	32 x 2.4 x 3.9 in.	90	120V	5
UC-42-15-930-SV-D	53506111	42" Linkable, Beam Adjustable Under Cabinet Light - Triac Dim-to-Warm (Direct Wire or Plug-in)	100w	22w	1,500	68	3000K-2200K	42 x 2.4 x 3.9 in.	90	120V	5

INSTALLATION

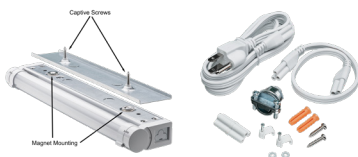

Use captive wood screws to attach mounting plate to underside of cabinet.



Position the light anywhere on the mounting plate. Magnets will hold the fixture permanently in place.



Plug power source shown here. This fixture can also be direct wired.

DIMMER LIST

Brand	Dimmer Model #	12" Dim2warm 533502111	18" Dim2warm 533503111	24" Dim2warm 533504111	32" Dim2warm 533505111	42" Dim2warm 533506111
Lutron	DVCL-153PR-WH			✓	✓	✓
Lutron	CTCL-153-PDH-WH				✓	✓
Lutron	P-PKG1W-WH-R				✓	✓
Lutron	MSCL-OP153M	✓	✓	✓		
Lutron	MACL-153MH-WH	✓	✓	✓	✓	✓
Lutron	SCL-153PR-WH	✓		✓		
Lutron	TGCL-153PR-WH	✓	✓	✓		
Lutron	TGCL-153PH-WH	✓	✓	✓	✓	✓
Lutron	AYCL-153-WH	✓	✓	✓		
Leviton	CD-C22-06672-12A	✓	✓	✓		
Leviton	CD-R62-06674-12A	✓	✓	✓		
Leviton	CD-R50-IPL06	✓	✓	✓		
Leviton	81000-I	✓	✓			
Leviton	R62-06674-P9W				✓	✓
Leviton	R12-06672-1LW				✓	✓
Leviton	R50-IPL06-10M				✓	✓
Legrand	ADWR703HW4	✓	✓	✓		
Legrand	ADPD453LM2	✓	✓	✓		
Eaton	AAL06-C1				✓	✓
Eaton	SAL06P-W-K				✓	✓
Cooper	DLC03PA-PTA	✓	✓	✓		
Cooper	9573A-PTA	✓	✓			
Leviton	SB-011-IPL06-22A	✓	✓	✓		

PACKAGING SPECIFICATIONS

Part #	Model #	UPC	UCC	Inner Carton Dimensions	Inner Carton Weight	Shipper/Master Carton Dimensions	Shipper/Master Carton Weight
UC-12-5-930-SV-D	53502111	849489009094	50849489009099	18.3 x 1.7 x 2.5 in.	1.1 lbs.	18.8 x 3.3 x 9.4 in.	7.29 lbs.
UC-18-9-930-SV-D	53503111	849489009100	50849489009105	24.3 x 1.7 x 2.5 in.	1.4 lbs.	24.8 x 3.3 x 9.4 in.	8.96 lbs.
UC-24-12-930-SV-D	53504111	849489009117	50849489009112	30.3 x 1.7 x 2.5 in.	1.7 lbs.	30.9 x 3.3 x 9.4 in.	10.94 lbs.
UC-32-10-930-SV-D	53505111	849489009261	50849489009266	38.3 x 1.7 x 2.5 in.	2.3 lbs.	38.9 x 3.3 x 9.4 in.	14.0 lbs.
UC-42-15-930-SV-D	53506111	849489009278	50849489009273	48.3 x 1.7 x 2.5 in.	2.9 lbs.	48.9 x 3.3 x 9.4 in.	18.0 lbs.
UC-12-6-830-SV	54196112	836607009333	50836607009338	12.3 x 3.4 x 1.3 in.	0.6 lbs.	12.8 x 6.9 x 4.0 in.	3.15 lbs.
UC-18-8-830-SV	54195112	836607009340	50836607009345	18.3 x 3.0 x 1.3 in.	0.8 lbs.	18.6 x 3.3 x 5.4 in.	4.0 lbs.
UC-24-11-830-SV	54194112	836607009357	50836607009352	24.3 x 3.0 x 1.3 in.	0.8 lbs.	24.6 x 3.3 x 5.4 in.	4.9 lbs.
UC-12-5-930-SV-D	53502111	849489009094	50849489009099	18.3 x 1.7 x 2.5 in.	1.1 lbs.	18.8 x 3.3 x 9.4 in.	7.29 lbs.
UC-18-9-930-SV-D	53503111	849489009100	50849489009105	24.3 x 1.7 x 2.5 in.	1.4 lbs.	24.8 x 3.3 x 9.4 in.	8.96 lbs.
UC-24-12-930-SV-D	53504111	849489009117	50849489009112	30.3 x 1.7 x 2.5 in.	1.7 lbs.	30.9 x 3.3 x 9.4 in.	10.94 lbs.
UC-32-10-930-SV-D	53505111	849489009261	50849489009266	38.3 x 1.7 x 2.5 in.	2.3 lbs.	38.9 x 3.3 x 9.4 in.	14.0 lbs.
UC-42-15-930-SV-D	53506111	849489009278	50849489009273	48.3 x 1.7 x 2.5 in.	2.9 lbs.	48.9 x 3.3 x 9.4 in.	18.0 lbs.