

SUPERWINCH

ELECTRIC WINCHES
HYDRAULIC WINCHES
MOUNT SYSTEMS
HUBS
POWER DRIVES
WIRELESS SYSTEMS
ACCESSORIES

CATALOG
2009



Legacy of Solutions



There's plenty new in your 2009 Superwinch Catalog... new models, new features, and new warranties. We're in new markets, too, reaching every winch user from professional operators to weekend sports enthusiasts.



What isn't new is how Superwinch has been engineering pulling solutions since 1970. Today's Superwinch is a global company providing winches from 1,000 to 30,000 pounds in capacity for diverse industries and applications. These products share in common Superwinch's famous compact design, user-friendly installation, and solid construction for safe, simple, and reliable operation.

Continuous Improvements

No resting on laurels here. Innovative design and timely market response keep Superwinch and you, our distribution partners, on top. Our Limited Lifetime Warranty on all mechanical components and the exclusive Limited Lifetime With 3-year Solenoid Warranty on the S³™ sealed, submersible solenoid provides the best protection in the business. And our newly expanded EP Extreme Performance Series of heavy duty winches features the lowest amp draw in the industry, ensuring peak operating capacity and performance.



Team Serious



Providing you with superior products is just the beginning. Superwinch promises you superior customer service. Our "Get Serious" campaign means just that: we're serious about quality, performance, value, and service for every product, every customer.

Fresh marketing and point-of-sale materials build and sustain brand recognition through the market chain. We've also added a technical support hotline.



www.superwinch.com

Serious times call for serious solutions. That's the Superwinch tradition.

Little Commander 800 lb

FM 1200 thru 2400 lb

X3 4000 lb

Husky 10,000 lb

X9 9000 lb



1966

1970

1982

1989

1995

Customer Service

800-323-2031

WINCH SERIES	CAPACITY RANGE	APPLICATION	PAGES
Extreme Performance EP and EPI	6000 - 9000 lbs	Heavy-Duty Recovery, Planetary Gear	2-3
NEW Synthetic Rope	9000 - 9500 lbs	Heavy-Duty Recovery, Planetary Gear (synthetic)	4-5
Super-Duty EP	12,500 - 16,500 lbs	Super-Duty Recovery, Planetary Gear	6-7
Husky Series	8500 - 10,000 lbs	Heavy-Duty Recovery, Worm Gear	8-9
Large X Series	6000 - 9000 lbs	Heavy-Duty Recovery, Planetary Gear	10
LP8500 Entry Level	8500 lbs	Entry Level Recovery, Planetary Gear	11
S Series Trailer Winches	3000 - 5500 lbs	High Performance Utility	12-13
GP Series	2300 - 3000 lbs	General Purpose Utility	14
UT3000 / LT2000	2000 - 3000 lbs	General Purpose Utility (entry level)	15
X Series	1000 - 3000 lbs	The Original Superwinch	16
Winch-in-a-bag	2000 lbs	Portable Winch Solution	17
ATV and UTV Series	2000 - 4000 lbs	High Performance for ATV and Side-by-Side	18-21
Crane Series	1000 lbs	For safely moving and lifting materials	22-23
AC Series	1000 - 3000 lbs	When AC Power is the best option	24-25
Hydraulics	8000 - 30,000 lbs	Commercial / Industrial Hydraulics	34-39
Power Drives		Commercial / Industrial	40-44
Winch Selection Guide (how to choose a winch)			44-45
ATV Mount Kits			21
Accessories			26-27
Supermount System			28-29
Winch Mounting Systems			30
Freedom Switch™ Wireless Control Systems			31
Hubs			32-33
Master Winch Application Guide			42
Warranties Information			43



S4500 4500 lb



1996

T1500 1500 lb



1999

EPI 9000 lb



2004

ATV3000 lb



2007

LP8500



2008

UT3000 lb



LT2000 lb

FOCK95 9500 lb



2009



EXTREME PERFORMANCE EP SERIES

It took two years to develop and perfect our most popular, off-road winch, the EP. All EP's models feature a Lifetime Warranty on mechanical parts and 3-year protection on the exclusive **S³** Solenoid, the Industry's Best Warranty.

The EP Series Advantage

Robust 4.6 hp series wound motor standard on 9,000 lb. models.

Drum supports the use of 3/8" synthetic rope.

Standard heavy-duty Roller Fairlead.

Heavy-duty Clevis pinned and latched hook.

The bridge design of the EP9.0 covers the electrical components and gives your 4x4 a sleek profile.



S³ Sealed Submersible Solenoid with a 3-year warranty, the industry's best!

Full & turn clutch with stainless steel ergonomic grip.

EP Series winches can be used with synthetic rope. (Outside-the-drum brake allows heat dispersion.)

Three stage planetary gears develop maximum power from a tough, series wound motor.





Standard Features

- 12VDC / Freespooling / Roller Fairlead
- 4.6 hp Series Wound Motor
- Automatic Load Holding Braking (outside of drum)
- S³ Sealed Submersible Solenoid with 3-Year Warranty
- Heavy Duty Removable Clevis Pin, Latched Hook

Recommended Accessories

- Accessory Kit 2224
- 20,000 lb Swing Away Pulley Block 7750A
- 3" x 8' Tree-Saver Strap 2531
- 2" x 20' Strap 2517
- Bow Shackles 2538
- Winch Cover (EP) 2302305
- Winch Cover (EP with remote mount) 1566
- Front Wiring Kit 2007
- Trailer Wiring Kit 2008
- Wireless Control 06702
- Large Cradle Mount 2050

EP and EP Series include gear boxes that rotate for custom positioning of the freespool pull and turn clutch control grip.



9 positions are possible for repositioning freespool clutch.



Specifications

Rated Line Pull	9000 lb (4082 kg) Bottom Layer
Motor	4.6 hp (3.4kW) Series Wound, 12V DC
Wire Rope	21/64" (8.3mm) x 100' (38.1m)
Mounting Bolt Pattern	10" x 4.5" (254mm x 114.3mm)
Installed Weight	108 lb (49.1 kg) EP9.0 / 114 lb (51.8 kg) EP9.0

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
EP9.0: 9,000 lbs (4082 kg)	350 12V (210 24V)	6.4 FPM (2.0 M/M)
EP9.0: 9,000 lbs (4082 kg)	350 12V (210 24V)	6.4 FPM (2.0 M/M)



FN 2050 Large Cradle Mount Fits both EP and EP Series

Solenoid housing on the EP9.0 and 6.0 is removable to allow custom remote mounting. Requires wiring kit, FN 2302283



Rugged, quiet all-steel planetary gear set, standard in all EP and EP models.



EP and EP Series Pull & turn clutch with stainless steel ergonomic grip.



The Superwinch Thimble Protects wire rope from wear and tear, extends wire rope life.



09032 12VDC EP9.0 with Roller Fairlead
09033 24VDC EP9.0 with Roller Fairlead

06032 12VDC EP6.0 with Roller Fairlead
06033 24VDC EP6.0 with Roller Fairlead



Note: Requires mounting plate to mount roller or hawse fairlead.



09034 12VDC EP9.0 with Roller Fairlead
09035 24VDC EP9.0 with Roller Fairlead

06034 12VDC EP6.0 with Roller Fairlead
06035 24VDC EP6.0 with Roller Fairlead



Note: Requires mounting plate to mount roller or hawse fairlead.

Never use a winch to lift or move people.
Never use a winch as an overhead hoist or to suspend a load.

Technical Service

866-781-0061

EXTREME SYNTHETIC PERFORMANCE SERIES

The most Synthetic Rope Friendly winch on the market (brake not inside drum, heat does not degrade synthetic), EPI gets synthetic rope of its own and a little brother, who really likes to compete!

We consulted off-road instructors, a marine industry rope consultant and tested, tested, tested, concluding that Dyneema® was the best synthetic rope material for off-roaders. It's very strong, very lightweight and very easy to handle, especially in 3/8" diameter.



Advantages:

ROCK 95

9500 lb of pulling power in a small, lightweight package!

Installed weight only 58 lbs

50' of 3/8" Synthetic rope with rock guard

Low, narrow profile

Industrial Grade Gunnebo™ brand, latched hook

Blue anodized aluminum hawse

Three Solenoid Box install options

S³ Sealed, Submersible, Solenoid with 3-year Warranty

EPI9.0S

At least 30% lighter than wire rope winches

80' of 3/8" Synthetic rope with rock guard

Blue anodized aluminum hawse

S³ Sealed, Submersible, Solenoid with 3-year Warranty



online



Rock 95 and EF9.0S
 9500 lb (4309 kg)
 9000 lb (4082 kg)

4x4
Utility & Multi



Standard Features

- 12VDC / Freespooling / Roller fairlead
- 4.6 hp Series Wound Motor
- Automatic Load Holding Braking (outside of drum)
- Planetary Gear-Train
- S³ Sealed Submersible Solenoid with 3-Year Warranty
- Heavy Duty Removable, Gunnebo™ with Latched Hook
- Heavy Duty Aluminum Hawse Fairlead

Recommended Accessories

- Accessory Kit 2224
- 20,000 lb Swing Away Pulley Block 7750A
- 3" x 8' Tree-Saver Strap 2531
- 2" x 20' Strap 2517
- Bow Shackles 2538
- Winch Cover (EF9.0S) 2302305
- Front Wiring Kit 2007
- Wireless Control 06702
- Large Cradle Mount (EF9.0S) 2050



9 positions are possible for repositioning freespool clutch.

EF9.0S and ROCK95 Series include gear boxes that rotate for custom repositioning of the freespool pull and turn clutch grip.



Specifications

Rated Line Pull ROCK95	9500 lb (4309 kg) Bottom Layer
Rated Line Pull EF9.0S	9000 lb (4082 kg) Bottom Layer
Motor	4.6 hp (3.4kW) Series Wound, 12VDC
Synthetic Rope ROCK95	3/8" (9.5mm) x 50' (15.24m) Dyneema
Synthetic Rope EF9.0S	3/8" (9.5mm) x 80' (24.4m) Dyneema
Mounting Bolt Pattern	10" x 4.5" (254mm x 114.3mm)
Installed Weight ROCK95	57.6 lb (26.13 kg) Winch & Rope
Installed Weight EF9.0S	69.0 lb (31.3 kg) Winch & Rope

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
ROCK95: 9500 lbs (4309 kg)	385 12V	2.6 FPM (0.8 M/M)
EF9.0SR: 9000 lbs (4082 kg)	350 12V	6.4 FPM (2.0 M/M)

S³ Sealed Submersible Solenoid with a 3-Year Warranty, the industry's best!



Rugged, quiet all-steel planetary gear set, standard in all ROCK 95 and EF9.0S models.



EF9.0S and ROCK95 Series pull and turn clutch with steel ergonomic grip.



Solenoid housing on the ROCK95 is removable to allow custom remote mounting. Requires wiring kit, FN 2302283



09532FK
12VDC ROCK95 Offset (box over motor; as shipped)



Note: Requires mounting plate to mount roller or hawse fairlead.

MOUNTING OPTIONS



Competition (box remotely mounted; kit included)

Centerline (box over drum; kit included)

09034SR
12VDC EF9.0
Synthetic Rope



Note: Requires mounting plate to mount roller or hawse fairlead.

Never use a winch to lift or move people.
 Never use a winch as an overhead hoist or to suspend a load.

Technical Service 866-781-0061

NEW SYNTHETIC OFF-ROAD WINCHES

EXTREME PERFORMANCE LARGE EP SERIES


WORK TRUCK SUPER DUTY PLANETARY GEAR WINCHES

Speed and power make our tough EP Series winches ideal for recovery and super duty applications. Available in two capacities, these steel three-stage planetary gear winches are packed with all the features essential for efficient and reliable operation under the heaviest loads.



The EP Series Advantage

Foot-forward design & low profile for easy installation.
9-position "clocking" for convenient freespool location.
Remote mountable solenoid housing for convenience.
Automatic Load-Holding Brake (outside the drum).
Synthetic Rope friendly (no drum brake to melt rope).
S³ Sealed, Submersible, Solenoid with 3-year Warranty.
Industrial grade 5.6 hp Series Wound Motor.
Available in 12V DC and 24V DC versions.

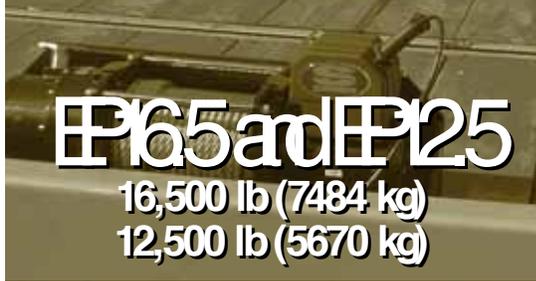

EP16.5 and EP12.5

16,500 lb (7484 kg)
12,500 lb (5670 kg)



Standard Features

- 12VDC / Freespooling / Roller fairlead
- 5.6 hp Series Wound Motor
- Automatic Load Holding Braking (outside of drum)
- Planetary Gear-Train
- **S³** Sealed Submersible Solenoid with 3-Year Warranty

Recommended Accessories

- Accessory Kit 2224
- 20,000 lb Swing Away Pulley Block 7750A
- 3' x 8' Tree-Saver Strap 2531
- Bow Shackles 2538
- Front Wiring Kit 2007
- Trailer Wiring Kit 2008
- Wireless Control 06702
- Winch Mounting Plate 2302287



Foot forward is the only approved mounting method

EP and EPI Series include gear boxes that rotate for custom repositioning of the freespool pull and turn clutch control grip.



9 positions are possible for repositioning freespool clutch.



Specifications

Rated Line Pull EP16.5	16,500 lb (7484 kg) Bottom Layer
Rated Line Pull EP12.5	12,500 lb (5670 kg) Bottom Layer
Motor	5.6 hp Series Wound, 12V DC
Wire Rope EP16.5	7/16" (11.1mm) x 90' (27.4m)
Wire Rope EP12.5	3/8" (9.5mm) x 125' (38.1m)
Mounting Bolt Pattern	10" x 3.5" (254mm x 88.9mm)
Installed Weight EP16.5	150 lb (68.5 kg) Winch & Rope
Installed Weight EP12.5	146 lb (66.2 kg) Winch & Rope

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
EP16.5: 16,500 lbs (7484 kg)	385 12V (330 24V)	2.6 FPM (0.8 M/M)
EP12.5: 12,500 lbs (5670 kg)	350 12V (310 24V)	3.0 FPM (1.0 M/M)

S³ Sealed Submersible Solenoid with a 3-Year Warranty, the industry's best!



Rugged, quiet all-steel planetary gear set, standard in all EP and EPI models.



EPI and EP Series Pull & turn clutch with steel ergonomic grip.



Solenoid housing on the EP12.5 and 16.5 is removable to allow custom remote mounting. Requires wiring kit, FN 2302283



1516200
12VDC EP16.5 with Roller Fairlead
1516300
24VDC EP16.5 with Roller Fairlead

Note: Requires mounting plate to mount roller or hawse fairlead.



1512200
12VDC EP12.5 with Roller Fairlead
1512300
24VDC EP12.5 with Roller Fairlead

Note: Requires mounting plate to mount roller or hawse fairlead.

Never use a winch to lift or move people.
Never use a winch as an overhead hoist or to suspend a load.

Technical Service

866-781-0061

HIGH PERFORMANCE SERIES

EXTREME DUTY WORM GEAR WINCHES

Made in England and engineered for indestructibility, the Husky Series from Superwinch contains the industry's most rugged worm-gear drive mechanism and 4.2 hp series wound motors. Case-hardened nickel spur gears and a steel-centered phosphor bronze worm wheel matched to a case-hardened ground and polished worm shaft make this the winch also preferred by landscapers and outdoor professionals whose vehicles get a workout.



The Husky Series Advantage

- Virtually indestructible worm & spur gear system.
- Synthetic Rope friendly (worm drive, will not degrade synthetic rope).
- Back-drive resistance, load holding brake system.
- Remote mountable solenoid housing.
- S³** Sealed, Submersible, Solenoid with 3-year Warranty.
- Industrial grade 4.2 hp Series Wound Motor.
- Husky 10, available in 24V DC version.




online



Husky 10 and 8.5
 10,000 lb (4536 kg)
 8500 lb (3856 kg)



**Utility
& Multi**

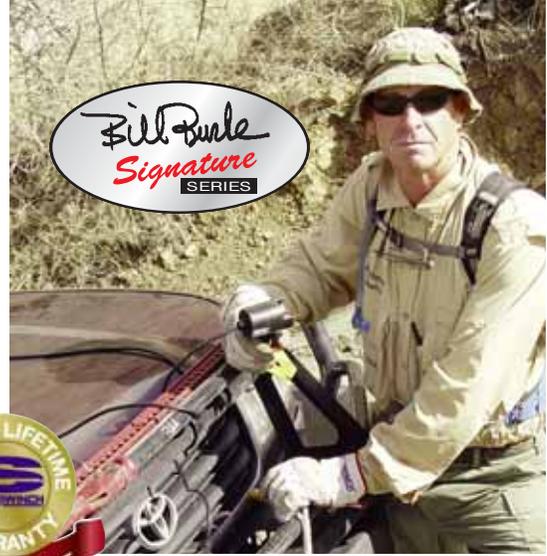

Standard Features

- 12VDC / Freespooling / Roller Fairlead
- 4.2 hp series sealed permanent magnet motor
- **S** Sealed Submersible Solenoid with 3-Year Warranty
- Solenoid housing removable for remote mounting
- Worm gear
- Lever-operated clutch
- Back-drive resistance, load holding brake system

Recommended Accessories

- Pulley Block 7750A
- Winch Cover 1566
- Roller Fairlead 8584
- Accessory Kit 2224
- Clevis Hook with Latch 90-20435
- Front Wiring Kit 2007
- Trailer Wiring Kit 2008
- Wireless Control System 06702

A Pulley Block doubles the capacity of this already bullet-proof powerful winch.



S Sealed Submersible Solenoid with a 3-Year Warranty the industry's best!



Specifications

Rated Line Pull Husky 10	10,000 lb (4536 kg) Bottom Layer
Rated Line Pull Husky 8.5	8,500 lb (3856 kg) Bottom Layer
Motor	4.2 hp Series Wound, 12V DC
Wire Rope Husky 10	3/8" (9.5mm) x 90' (27.4m)
Wire Rope Husky 8.5	5/16" (7.9mm) x 150' (45.7m)
Synthetic Rope Signature	3/8" (9.5mm) x 80' (24.4m)
Mounting Bolt Pattern	10" x 4.5" (254mm x 114.3mm)
Installed Weight H 8.5	113 lb (51 kg) Winch & Rope
Installed Weight H 10	113 lb (51 kg) Winch & Rope

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
Husky 10: 10,000 lbs (4536 kg)	450 12V	1.5 FPM (0.5 M/M)
Husky 8.5: 8,500 lbs (3856 kg)	405 12V	1.5 FPM (0.5 M/M)

Gear design is the key to Husky's virtual indestructibility: case hardened nickel spur gears, steel-centered phosphor bronze wormwheel, and case-hardened ground and polished worm shaft.



"Whatever off-road vehicle you drive, there's a Superwinch designed to deliver the power to meet your needs. I've been using Superwinch products for over 25 years. Winches that are serious enough to carry the Superwinch name have my confidence. My job is training, instructing, guiding and consulting off-road enthusiasts from all over the world".

GET SERIOUS,
get Superwinch!

Bill Burke

Bill Burke

2404
12VDC Husky 10 without Roller Fairlead
2404A
12VDC Husky 10 with Roller Fairlead

2401
12VDC Husky 8.5 without Roller Fairlead
2401A
12VDC Husky 8.5 with Roller Fairlead

Bill Burke
Signature
SERIES

2404BB
12VDC Husky 10 with Roller Fairlead,
Synthetic Rope and Gunnebo™ Hook




Never use a winch to lift or move people.
Never use a winch as an overhead hoist or to suspend a load.

Technical Service

866-781-0061

X9 and X6CD

9000 lb (4082 kg)
6000 lb (2722 kg)

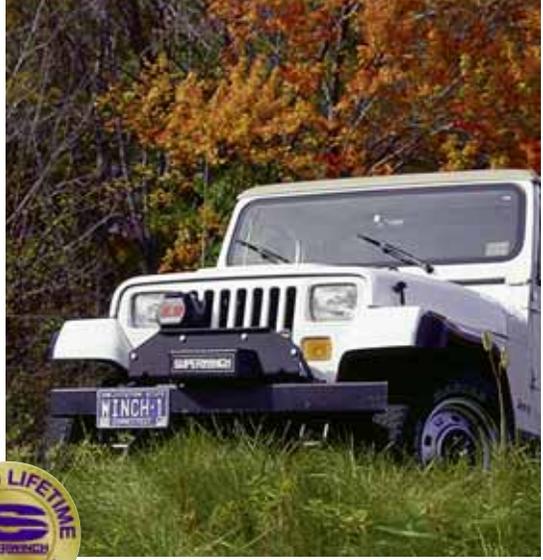

Standard Features

- 12VDC / Freespooling / Roller Fairlead
- Heavy-Duty Series Wound Motor
- Solenoid housing removable for mounting elsewhere (requires a wiring kit)
- Clutch engages with a 1/4 turn

Recommended Accessories

- Pulley Block 7750A
- Winch Cover 1566
- Accessory Kit 2224
- Front Wiring Kit 2007
- Trailer Wiring Kit 2008
- Clevis Hook with Latch 90-20435
- Large Cradle 2050



Specifications

Pated Line Pull X9	9000 lb (4082 kg) Bottom Layer
Pated Line Pull X6CD	6000 lb (2722 kg) Bottom Layer
Motor X9	4.2 hp Series Wound, 12V DC
Motor X6CD	3.4 hp Series Wound, 12V DC
Wire Rope	5/16" (7.9mm) x 100' (30.5m)
Mounting Bolt Pattern	10" x 4.5" (254mm x 114.3mm)
Installed Weight X9	82 lb (37 kg) Winch & Rope
Installed Weight X6	72 lb (33 kg) Winch & Rope



Superwinch X9 is the winch of choice for Toyota Australia.

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
X9 : 9000 lbs (4082 kg)	316 12V	6.0 FPM (1.8 MM)
X6 : 6000 lbs (2722 kg)	400 12V	2.5 FPM (0.8 MM)

Large all steel differential planetary drive gears.



Easy-to-use freespooling clutch 1/4 turn activation.



Remote mountable solenoid station with bracket mount.



1901C
12VDC X9 with Roller Fairlead



Note: Requires mounting plate to mount roller or hawse fairlead.



1646A
12VDC X6 with Roller Fairlead



Note: Requires mounting plate to mount roller or hawse fairlead.



www.superwinch.com



LP8500
8500 lb (3856 kg)

ENTRY LEVEL
Great Winch for a
Reasonable Price



The LP8500 provides reliable, powerful performance for off-road and utility operation while introducing owners to the renowned advantages of the Superwinch brand. When you're shopping value, Superwinch lets you have quality at a great price.

Standard Features

- Powers Load In and Out
- 4.5 hp Series Wound Motor
- Automatic Load Holding, Mechanical Braking
- Planetary Gear-Train
- Circuit Breaker Protected
- Weather Sealed Solenoids
- Lever Shift Freespooling Clutch
- Heavy Duty Latched Hook with Rope Thimble
- Heavy Duty Powder Coated Hawse Fairlead
- Rubber Handheld Remote

Recommended Accessories

- Accessory Kit 2224
- Roller Fairlead 2302293
- Mount Plate & Roller Fairlead 2302294
- Pulley Block 7750A
- 2" x 8' Tree-Saver Strap 2531
- 2" x 20' Tree-Saver Strap 2517
- Bow Shackles 2538
- Winch Cover 2302305
- Large Cradle Mount 2050



Specifications

Rated Line Pull	8500 lb (3856 kg) Bottom Layer
Motor	4.5 hp (3.3kW) Series Wound, 12V DC
Wire Rope	5/16" (7.9mm) x 94' (29m)
Mounting Bolt Pattern	10" x 4.5" (254mm x 114.3mm)
Installed Weight	76.0 lb (34.5 kg) Winch & Rope

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
8500 lbs (3856 kg)	320 12V	3.5 FPM (1.1 M/M)

2302293
LP8500 Roller Fairlead



Add the Roller Fairlead for robust wire rope performance

2302292
LP8500 Mount Plate



Designed to ensure adequate support for winching activities. Made of 1/4" steel with black powdercoat finish to resist corrosion. Includes mounting hardware.



1585200
12VDC LP8500 with Hawse Fairlead

1585201
12VDC LP8500 with Roller Fairlead and Mount Plate



Note: Requires mounting plate to mount roller or hawse fairlead.

Never use a winch to lift or move people.
Never use a winch as an overhead hoist or to suspend a load.

Technical Service

866-781-0061

11

HIGH PERFORMANCE SERIES


INDUSTRIAL & SEVERE DUTY PLANETARY GEAR WINCHES

The S Series from Superwinch is the most popular performance trailer winch on the market, and with good reason. With race proven reliability, S Series winches have full metal gears, powerful motors, integrated sealed switching solenoid, and rugged 30' handheld remote.



The S Series Advantage

- Full metal gears deliver power and performance.
- Preferred by the professionals for safe, dependable loading.
- Handheld switch on 30' (49.1m) of rubber cord is included.
- Instant stop design ensures absolutely no coasting.
- Lever operated clutch simplifies fast wire rope payout.
- Fully weather resistant cover keeps out the elements.
- ☞ Solenoid is submersible and sealed, and comes with an exclusive 3-year warranty.

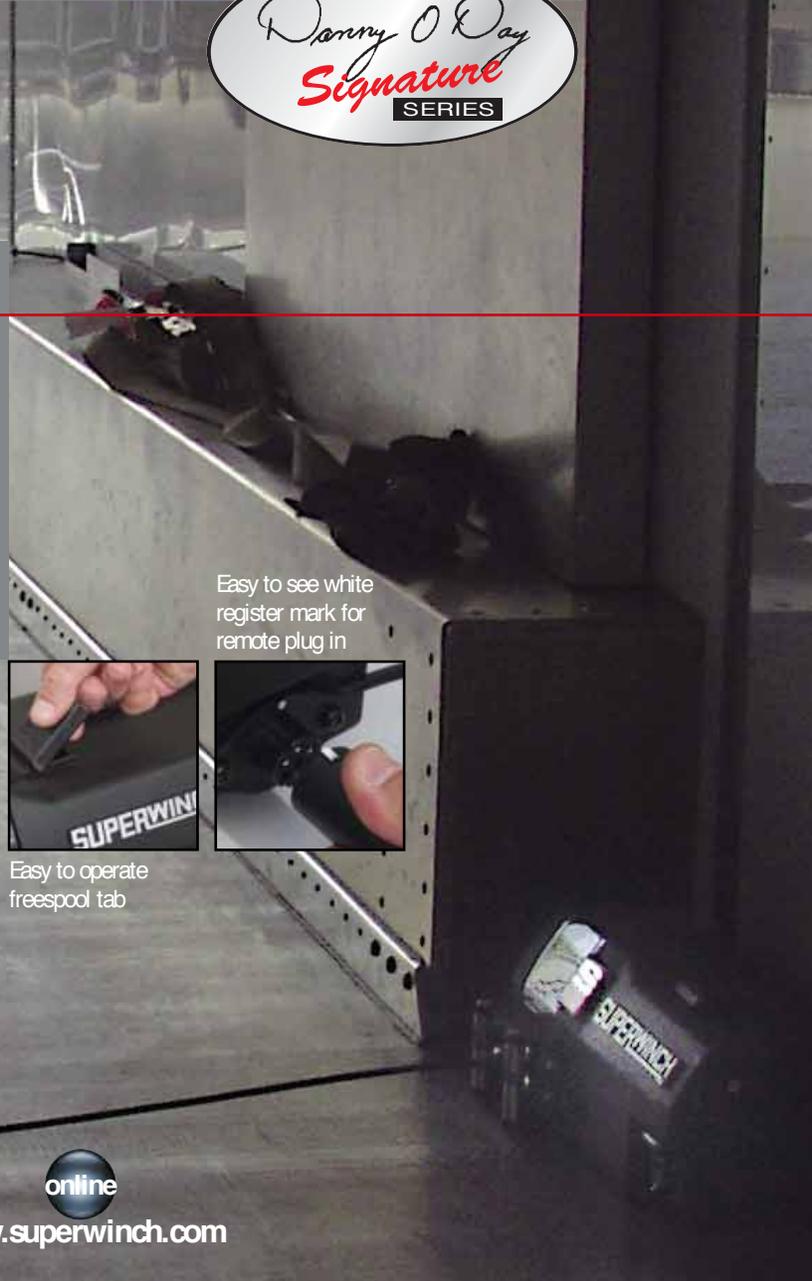


Easy to see white register mark for remote plug in



Easy to operate freespool tab



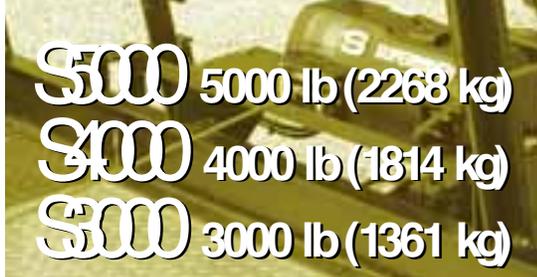

Standard Features

- 12VDC / Freespooling / Roller Fairlead
- 2.1 hp Series Wound Motor
- Sealed Submersible Solenoid with 3-Year Warranty
- Lever Operated Clutch
- Mechanical Load Holding and Dynamic Brake



Recommended Accessories

- Accessory Kit 2224
- Wireless Remote Kit 06702
- Pulley Block 2229A
- 2" x 20' Recovery Strap 2517
- Bow Shackles 2538
- Winch Cover 1505
- Front Wiring Kit S5000 2007
- Trailer Wiring Kit S3000 and S4000 1520
- Trailer Wiring Kit S5000 2008
- Small Cradle Mount 2055



1450200
12VDC S5000 with Roller Fairlead
1450300
24VDC S5000 with Roller Fairlead

1440200
12VDC S4000 with Roller Fairlead
1440300
24VDC S4000 with Roller Fairlead



"Whatever trailer you're loading, there's a Superwinch designed to deliver the power to meet your needs. I've been using Superwinch products for over 23 years. My job is wheel standing and entertaining crowds of race enthusiasts from all over the world".

GET SERIOUS,
get Superwinch!

Danny O'Day
Danny O'Day

1450200DD
12VDC Synthetic Rope with Roller Fairlead
and Wireless Remote



Specifications S5000

Rated Line Pull	5000 lb (2268 kg) Bottom Layer
Motor	2.1 hp (1.57kW) Series Wound, 12V DC
Wire Rope	1/4" (6.4mm) x 50' (15.2m)
Mounting Bolt Pattern	2 Hole, 3.69" (93.7mm) on center
Installed Weight	38.9 lb (17.6 kg) Winch & Rope

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
5000 lbs (2268 kg)	350 12V	4.5 FPM (1.4 M/M)

Specifications S4000

Rated Line Pull	4000 lb (1814 kg) Bottom Layer
Motor	1.8 hp (1.34 kW) Series Wound, 12V DC
Wire Rope	7/32" (5.6mm) x 60' (18.2m)
Mounting Bolt Pattern	2 Hole, 3.69" (93.7mm) on center
Installed Weight	38.9 lb (17.6 kg) Winch & Rope

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
4000 lbs (1814 kg)	311 12V	4.5 FPM (1.4 M/M)

Specifications S3000

Rated Line Pull	3000 lb (1361 kg) Bottom Layer
Motor	1.3 hp (.97 kW) Series Wound, 12V DC
Wire Rope	3/16" (4.8mm) x 60' (18.2m)
Mounting Bolt Pattern	2 Hole, 3.69" (93.7mm) on center
Installed Weight	38.9 lb (17.6 kg) Winch & Rope

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
3000 lbs (1361 kg)	200 12V	9.5 FPM (2.2 M/M)

Specifications Danny O'Day Signature Series

Rated Line Pull (rolling weight)	6400 lb (2903 kg) Bottom Layer
Motor	2.1 hp (1.57 kW) Series Wound, 12V DC
Synthetic Rope	1/4" (6.4mm) x 40' (12.2m)
Mounting Bolt Pattern	2 Hole, 3.69" (93.7mm) on center
Installed Weight	23.3 lb (10.6 kg) Winch & Rope

Performance 12VDC (Bottom layer on drum)

Line Pull (rolling weight)	Motor Amp Draw	Line Speed
6400 lbs (2903 kg)	350 12V	4.5 FPM (1.4 M/M)

Many of our units come standard with 50' of wire rope or more. In some cases this may be a disadvantage. Due to the length of your trailer you may be starting on the 3rd or 4th wrap. Simply shorten the wire rope to your needs. If you can work with 30', then shorten the wire rope and your performance will improve.

Never use a winch to lift or move people.
Never use a winch as an overhead hoist or to suspend a load.

Technical Service

866-781-0061

13



The Superwinch line of GP winches is loaded with big winch features. Power forward and reverse, mechanical and dynamic braking, freespooling drum, and a rugged 15 foot handheld remote are just the beginning!

The built-in benefits continue with our pre-mounted sealed switching solenoid, roller fairlead, and up to 60 feet of wire rope. Doubling the winch's pulling capacity is as easy as using the pulley block, also included.

Standard Features

- 12VDC / Freespooling
- Roller Fairlead / Steel spring tension plates
- 1.1 hp, low amp draw motor (GP3000)
- 0.71 hp, low amp draw motor (GP2300)
- **S** Sealed Submersible Solenoid with 3-Year Warranty
- Differential Planetary Gears
- Pull & Turn Clutch
- Mechanical and Dynamic Brake

Recommended Accessories

- Trailer Wiring Kit 1520
- Accessory Kit 1554
- Portable Winch Mount 2302298
- Wireless Control 06702

Specifications

Pated Line Pull GP3000	3000 lb (1361 kg) Bottom Layer
Pated Line Pull GP2300	2300 lb (1043 kg) Bottom Layer
Motor GP3000	1.1 hp 12VDC
Motor GP2300	0.71 hp 12VDC
Wire Rope GP3000	3/16" (4.8mm) x 50' (15.2m)
Wire Rope GP2300	5/32" (3.9mm) x 60' (18.2m)
Mounting Bolt Pattern	10" x 4.5" (254mm x 114.3mm)
Installed Weight GP2300	14 lb (6.4 kg) Winch & Rope
Installed Weight GP3000	15 lb (6.8 kg) Winch & Rope

Performance 12VDC (1st layer on drum)

Line Pull	Motor Amp Draw	Line Speed
GP3000: 3000 lbs (1361 kg)	180 12V	5.0 FPM (1.5 MM)
GP2300: 2300 lbs (1043 kg)	140 12V	1.6 FPM (0.5 MM)

Rugged all steel planetary gear set, strong enough for the largest loads, standard in all GP Models



Pulling capacity is doubled with 8000 pound pulley block, included.



S Sealed Submersible Solenoid with a 3-Year Warranty, the industry's best!



Receiver hitch mount is a simple cost efficient mounting option.



1330200
12VDC GP3000 with Freespooling and Roller Fairlead



Note: Requires mounting plate to mount roller or hawse fairlead.

1323200
12VDC GP2300 with Freespooling and Roller Fairlead



Note: Requires mounting plate to mount roller or hawse fairlead.





UT3000 and LT2000

3000 lb (1361 kg)

2000 lb (907kg)

ENTRY LEVEL
Great Winch for a
Reasonable Price



Utility
& Multi



Powerful, versatile, and easy to use, the UT3000 and LT2000 can be permanently mounted or used as a portable winch with optional quick-connect wiring and mounting kits. Full metal planetary gear train provides strong yet quiet operation. Several additional features, including dynamic braking (UT3000), circuit breaker, and low amp draw system, ensure big performance at a surprisingly affordable price.

Standard Features (UT3000)

- Entry Level Product
- 4-way Roller Fairlead
- Pull & Turn Free Spool Clutch
- Dynamic Braking
- Mounting Plate
- Full Metal Planetary Gear Train
- Removable Clevis Finned Hook
- Thimble on Rope
- Rubber Handheld Remote

Standard Features (LT2000)

- Entry Level Product
- Powers Load In and Out
- Wire Rope 50 ft 5/32" (15.2 m 3.9mm) Diameter
- Differential Planetary
- Pull and Turn Freespooling Clutch
- Low Amp, Permanent Magnet Motor
- Circuit Breaker Protected
- Latched Hook with Rope Thimble
- Sealed, Handheld Switch

Recommended Accessories

- | | |
|--------------------------------|---------|
| • Accessory Kit | 2302286 |
| • Pulley Block 8,000 lb | 2227A |
| • ATV Bow Shackles (pair) | 2302285 |
| • Portable 2" Receiver Mount | 1559B |
| • Portable Ball Hitch Mount | 2060 |
| • 25' Quick-Connect Wiring Kit | 1520 |
| • 2" x 6' Strap: 15,600 lb | 1509 |
| • 1" x 8' Tree-Saver Strap | 2302284 |
| • 2" x 20' Strap 15,600 lb | 2517 |

Specifications

Rated Line Pull UT3000	3000 lb (1361 kg) Bottom Layer
Rated Line Pull LT2000	2000 lb (907 kg) Bottom Layer
Motor UT3000	1.2 hp 12VDC
Motor LT2000	1.0 hp 12VDC
Wire Rope UT3000	3/16" (4.8mm) x 40' (12.0m)
Wire Rope LT2000	5/32" (3.9mm) x 50' (15.2m)
Mounting Bolt Pattern UT3000	2 Hble, 3.1" (79.3mm), 2x .034" (80.94mm)
Mounting Bolt Pattern LT2000	2 Hble, 3.15" (80mm) on center
Installed Weight UT3000	19.5 lb (8.84 kg) Winch & Rope
Installed Weight LT2000	12.0 lb (5.4 kg) Winch & Rope

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
UT3000: 3000 lbs (1361 kg)	110 12V	2.2 FPM (0.6 M/M)
LT2000: 2000 lbs (907 kg)	100 12V	2.5 FPM (0.8 M/M)

UT3000 everything is included in the box.

FN 2060
Portable Ball Hitch
Mounting Option



1331200
12VDC UT3000



FN 1559B
Portable 2" Receiver
Mounting Option



1220210
12VDC LT2000



ORIGINAL X SERIES

Utility & Multi



X2 & X2F

3000 lb / 1361 kg

STANDARD FEATURES

- Power In and Power Out
- Freespooling (1208 & 1215)
- Battery Cables With Terminals
- Circuit Breakers
- On The Motor Switching
- Wire Rope Tensioner
- Hawse Fairlead & Handsaver Bar



1208, 1215
12VDC With Removable Switch and Freespooling

RECOMMENDED ACCESSORIES

- Handheld Remote Switch Kit 15' 1515A
- Pulley Block 2227A
- Winch Cover 1504
- Roller Fairlead 1560A
- Accessory Kit 1554
- Trailing Wiring Harness 1520
- Remote Dash Mount Switch Plate 1501B



1201, 1213
12VDC With Removable Switch

SPECIFICATIONS

Rated Line Pull (Single Line)	3,000 lb. (1,361 kg)
Motor	1.3 hp
Gearing	Differential Planetary
Gear Ratio	148:1
Freespooling Clutch	Pull and Turn (1208 and 1215)
Braking Action	Dynamic
Wire Rope	7/32" x 40' (5.6mm x 12.2m)
Dimensions	1201, 1213 12.81"l. x 6.13"d. x 5.69"h. (325mm l. x 156mm d. x 146mm h.)
Dimensions	1208, 1215 15.34"l. x 6.13"d. x 5.69"h. (390mm l. x 156mm d. x 146mm h.)
Drum Dia./Length	1201, 1213 1.50" / 2.6" (38mm / 66mm)
Drum Dia./Length	1208, 1215 1.63" / 2.6" (41mm / 66mm)
Weight	1201, 1213 24 lb. (11 kg)
Weight	1208, 1215 26 lb. (12 kg)

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
3000 lbs (1361 kg)	223 12V	4.3 FPM (1.3 MM)

X1 & X1F

2000 lb / 907 kg

STANDARD FEATURES

- Power In and Power Out
- Freespooling (1181)
- Battery Cables With Terminals
- Circuit Breakers
- On The Motor Switching
- Wire Rope Tensioner (1181)
- Handsaver



1181
12VDC With Removable Switch and Freespooling

RECOMMENDED ACCESSORIES

- Handheld Remote Switch Kit 12' 1515A
- Pulley Block 2227A
- Winch Cover 1504
- Roller Fairlead 1560A
- Accessory Kit 1554
- Trailing Wiring Harness 1520
- Remote Dash Mount Switch Plate 1501B



1101
12VDC With Removable Switch

SPECIFICATIONS

Rated Line Pull (Single Line)	2,000 lb. (907 kg)
Motor	1.3 hp
Gearing	Differential Planetary
Gear Ratio	123:1
Freespooling Clutch	Pull and Turn (1181 Only)
Braking Action	Dynamic
Wire Rope	1101 3/16" x 25' (4.8mm x 7.6m)
Wire Rope	1181 3/16" x 50' (4.8mm x 15.2m)
Dimensions	1101 12.81"l. x 5.38"d. x 5.69"h. (325mm l. x 137mm d. x 146mm h.)
Dimensions	1181 15.34"l. x 6.13"d. x 5.69"h. (390mm l. x 156mm d. x 146mm h.)
Drum Dia./Length	1101 1.50" / 2.6" (38mm / 66mm)
Drum Dia./Length	1181 1.63" / 2.6" (41mm / 66mm)
Weight	1101 16 lb. (7 kg)
Weight	1181 20 lb. (9 kg)

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
2000 lbs (907 kg)	200 12V	7.0 FPM (2.1 MM)

EX1

1000 lb / 454 kg

STANDARD FEATURES

- Power In and Power Out
- Battery Cables With Terminals
- Circuit Breaker
- Handsaver
- On The Motor Switching



1110
12VDC With Removable Switch

RECOMMENDED ACCESSORIES

- Dash Mount Switch Plate 1515A
- Pulley Block 2227A
- Winch Cover 1504
- Roller Fairlead 1560A
- Accessory Kit 1554
- Trailing Wiring Harness 1520
- Handheld Remote Switch Kit 12' 1515A

SPECIFICATIONS

Rated Line Pull (Single Line)	1,000 lb. (454 kg)
Motor	1.1 hp
Gearing	Differential Planetary
Gear Ratio	123:1
Braking Action	Dynamic
Wire Rope	5/32" x 25' (3.9mm x 7.6m)
Dimensions	12"l. x 5.38"d. x 5.69"h. (305mm l. x 137mm d. x 145mm h.)
Drum Diameter	1.63" (32mm)
Drum Length	2.60" (66mm)
Weight	15 lb. (7 kg)

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
1000 lbs (454 kg)	92 12V	12.0 FPM (2.7 MM)





Utility
& Multi



PN 1120149



Compact easy to carry travel bag

Whether rescuing yourself or others from danger or pulling a load closer to your car, truck, ATV or snowmobile, this winch is handy and ready. All in a heavy-duty carrying bag with everything needed to keep you going.

Winch-in-a-bag
Standard Features

- LT2000 winch on powder coated winch platform
- Storage & carrying bag
- Completely portable
- 8' remote control
- Teflon® winch rope guide
- 8-gauge wiring with soldered connections
- 4' heavy-duty choker strap
- 6' heavy-duty choker strap
- 1 ton bow shackle

LT2000 Winch Features

- 12VDC / Freespooling
- Wire Rope 50 ft 5/32" (15.2 m 3.9mm) Diameter
- Differential Planetary
- Pull and Turn Freespooling Clutch
- Low Amp, Permanent Magnet Motor
- Latched Hook with Rope Thimble
- Sealed, Handheld Switch



Benefits

- No installation required
- All you need is included
- Easy to store, find and re-pack
- Can be carried from vehicle to vehicle
- Fast set-up and usage with any vehicle
- Can control the winch from a safe distance
- Does not require a winch mount

Dimensions: L-11.75" D-9" H-7"



Never use a winch to lift or move people.
Never use a winch as an overhead hoist or to suspend a load.

HIGH PERFORMANCE ATV and UTV SERIES

PLANETARY GEAR WINCHES

Designed with the toughest terrains in mind, the Superwinch line of ATV and UTV winches features our full metal three-stage planetary gear train and new sealed switching system that gets users out of virtually anything they get into. Mounting options and capacities up to 4,000 pounds make this the line of winches for serious recreation and work duty.



The ATV/UTV Series Advantage

Endurance and reliability are built in with full metal, three-stage planetary gears.

Center drum design and four-bolt mount pattern fit most existing mount kits.

UTV model includes mounting plate.

Sealed components ensure all-weather performance.

Handlebar mounted rocker switch can be custom positioned.

UTV model also includes handheld switch on a 10' rubber cord with socket included.



online



ATV and UTV

4000, 3000 and 2500 lb
(1815, 1362 and 1134 kg)



Standard Features

- 12VDC/ Freespooling/Roller fairlead
- 1.5 hp sealed permanent magnet motor
- Low amp draw
- Weather sealed solenoid
- 3-stage planetary gears
- Cam action clutch
- Mechanical and dynamic brake
- Fully sealed motor and solenoid provide all-weather protection

Recommended Accessories

- Accessory Kit 2302286
- Hand held remote, 10' with Socket Wiring 2340200
- Wireless Remote Kit 06212
- Pulley Block 2227A
- 1" x 8' Tree-saver Strap 2302284
- ATV Bow Shackles 2302285



Easy to engage and disengage, ergonomic freespool control, standard with ATV and UTV winches.



Handheld and switch socket, come standard with UTV4000, and mounts anywhere.

Socket and Handheld switch also sold separately for ATV2500 and 3000 models.



Rugged all steel planetary gear set, strong enough for the largest loads, standard in all ATV Models

Specifications

Rated Line Pull	UTV4000 4000 lb (1814 kg) Bottom Layer
	ATV3000 3000 lb (1361 kg) Bottom Layer
	ATV2500 2500 lb (1134 kg) Bottom Layer
Wire Rope	UTV4000 7/32" (5.5mm) x 50' (15.2m)
	ATV25&30 3/16" (4.8mm) x 50' (15.2m)
Mounting Bolt Pattern	UTV4000 3.0" x 6.66" (76mm x 169mm)
	ATV25&30 3.0" x 4.87" (76mm x 124mm)
Installed Weight	UTV4000 19 lb (8.61 kg) Winch & Rope
	ATV25&30 18.8 lb (8.52 kg) Winch & Rope
Ship Weight	UTV4000 32.7 lb (14.8 kg) Winch & Rope
	ATV25&30 25.6 lb (11.61 kg) Winch & Rope

ATV3000 and 2500 Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
2500 lbs (1134 kg)	210 12V	6.3 FPM (1.9 MM)
3000 lbs (1361 kg)	250 12V	3.3 FPM (1.0 MM)

UTV4000 Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
4000 lbs (1814 kg)	260 12V	3.0 FPM (0.9 MM)

With the ATV & UTV Series, everything is included in the box.



See page 21 for complete mounting kit guide.



1130210
12VDC ATV3000
1125200
12VDC ATV2500



Note: Requires mounting plate to mount roller or hawse fairlead.



UTV4000
Includes mounting plate.



Never use a winch to lift or move people.
Never use a winch as an overhead hoist or to suspend a load.

Technical Service

866-781-0061

19



LT2000 ATV

2000 lb (907 kg)

ENTRY LEVEL
Great Winch for a
Reasonable Price



A buyer's best choice for compact, quiet, all-purpose winching, the versatile LT2000 ATV winch from Superwinch is ideal for those needing a smaller, durable tool with brand-name reliability and function. The Superwinch Accessory and Switch Upgrade kit instantly converts the LT2000 Utility winch into an ATV-ready model. Constructed with a low amp, permanent magnet motor protected by a circuit breaker, the LT2000 delivers the reliable performance that has made Superwinch the brand users recognize and trust.



Specifications

Pated Line Pull	2,000 lb (907 kg) Bottom Layer
Motor LT2000 ATV	1.0 hp 12V DC
Wire Rope LT2000 ATV	5/32" (3.9mm) x 50' (15.2m)
Mounting Bolt Pattern LT2000	2 Hble, 3.15" (80mm) on center
Installed Weight LT2000	12.0 lb (5.4 kg) Winch & Rope

Standard Features (LT2000 ATV)

- Powers Load In and Out
- Wire Rope 50 ft 5/32" (15.2 m 3.9mm) Diameter
- Differential Planetary
- Pull and Turn Freespooling Clutch
- Low Amp, Permanent Magnet Motor
- Circuit Breaker Protected
- Latched Hook with Rope Thimble
- 4-way Roller Fairlead (LT2000 ATV)
- Sealed, Handle Bar Mounted Rocker Switch (LT2000 ATV)
- Sealed, Handheld Switch (LT2000 Utility)

Performance 12VDC (Bottom layer on drum)

Line Pull	Motor Amp Draw	Line Speed
LT2000: 2,000 lbs (907 kg)	100 12V	2.5 FPM (0.8 M/M)

With the LT2000 UTILITY, ATV upgrade is as easy picking up the switch kit or ATV Accessory kit, everything is included in the box.



FN 2302001
ATV Accessory Kit



FN 2320200
ATV Utility Upgrade Switch Kit



With the LT2000 ATV, everything is included in the box.



1120210
12VDC LT2000 ATV



Superwinch ATV Mount Kits include all mounting brackets, hardware and installation instructions

ATMOC CAT	Year	SW Part #s
700 4x4 (ALL including V2, H1)	07-08	2202873
650 4x4 (ALL including V2, H1, TRV, TBX)	05-08	2202873
650 4x4 V2	04	2202380
500 4x4 (ALL Except 05 TRM)	05-08	2202873
500 4x4 TRV/2-UP	05	2202380
500 4x4 (ALL Including TBX/TRM)	02-04	2202380
500 4x4 (ALL)	99-01	2202350
454 4x4 BEAR CAT	96-98	2202350
400 4x4 (ALL Including TBX/TRM)	06-08	2202873
400 4x4 (ALL Including TBX/TRM)	02-05	2202380
400 4x4	98-01	2202350
375 4x4 AUTOMATIC	02	2202380
300 4x4	02-05	2202380
300 4x4	98-01	2202350
250 2x4 / 4x4	01	2202350
650 & 700 FROWLER 4x4 or H1 XTX (ALSO ACCEPTS UTV4000)*	06-08	2202892

CAN-AM/Bombardier	Year	SW Part #s
800 OUTLANDER 4X4	06-08	2202893
800 OUTLANDER MAX 2-UP	06-08	2202893
650 OUTLANDER 4X4	06-08	2202893
650 OUTLANDER MAX 2-UP	06-08	2202893
500 OUTLANDER MAX 4X4	07-08	2202893
500 OUTLANDER 4X4	07-08	2202893
400 OUTLANDER MAX 2-UP	04-08	2202865
400 OUTLANDER 4X4	03-08	2202865
330 OUTLANDER 4X4	04-05	2202865

HONDA	Year	SW Part #s
TRX 650/680 FINCON (ALL)	03-08	2202867
TRX 500 FOREMAN RUBICON (ALL)	07-08	2202878
TRX 500 FOREMAN E.S.	05-06	2202877
TRX 500 FOREMAN RUBICON & GPSCAPE	05-06	2202879
TRX 500 FOREMAN RUBICON (ALL)	01-04	2202379
TRX 450 FOREMAN 4X4 (ALL)	98-04	2202381
TRX 420 RANCHER (ALL)	07-08	2202889
TRX 400 RANCHER (ALL)	04-07	2202375
TRX 400 4X4	95-01	2202381
TRX 350 RANCHER (ALL)	00-06	2202375
TRX 300 2X4 / 4X4	93-00	2202352

KAWASAKI	Year	SW Part #s
700 PRAIRIE 4x4	04-06	2202382
650 BRUTE FORCE 4X4 STRAIGHT AXLE	05	2202875
KVF 650 PRAIRIE 4X4	02-03	2202382
360 PRAIRIE (ALL)	03-08	2202846
3010 MULE DIESEL (4-DOOR)	05-07	2202868
KAF 550 MULE 4X4 04	04	2202868
610 MULE (ALSO ACCEPTS UTV4000)*	05-07	2202882
KAF 620 MULE 4X4 03-05	03-05	2202868
750 TERYX 4X4	08	2202891

* Kit fits UTV400 4 hole mount pattern 3.0" x 6.66" (76mm x 169mm)

Mounting kits are built strong and easy to install.



Never use a winch to lift or move people.
Never use a winch as an overhead hoist or to suspend a load.

POLARIS	Year	SW Part #s
SPORTSMAN 800 4X4 05-08	05-08	2202863
800 SPORTSMAN 800 X2 & TOURING TWO-UP	07-08	2202863
700 SPORTSMAN 4X4 X2 TWO-UP	08	2202863
700 SPORTSMAN 4X4	02-07	2202863
600 SPORTSMAN 4X4	03-05	2202863
500 SPORTSMAN X2 & TOURING TWO-UP	07-08	2202863
500 SPORTSMAN 4X4 X2 TWO-UP	06	2202887
500 SPORTSMAN 6X6	00-08	2202872
500 ATHLO 4X4	04-05	2202872
500 SPORTSMAN 4X4	04-08	2202863
500 SPORTSMAN 4X4	96-03	2202872
500 SPORTSMAN 6X6	00-07	2202872
500 MAGNUM XFLORFER 4X4	97-00	2202872
455 DIESEL 4X4	99-00	2202872
SPORTSMAN 450 4X4	06-07	2202863
425 XPEDITION 4X4	00	2202872
400 SPORTSMAN 4X4	04-05	2202864
400 SPORTSMAN 4X4	01-03	2202872
400 XFLORFER 4X4	95-02	2202872
335 SPORTSMAN 4X4	98-00	2202872
330 ATP 4X4	04-05	2202872
325/330 MAGNUM 4X4	00-04	2202872
300 XFLORFER 4X4	96-99	2202872
RANGERS (ALL) (ALSO ACCEPTS UTV4000)*	03-08	2202871
RANGER 2009 (NEW KIT COMING) (ALSO ACCEPTS UTV4000)*	09	2202894
RAZOR	08	2202890

SUZUKI	Year	SW Part #s
750 KING QUAD	08-09	2202874
700 TWIN PEAKS	04-05	2202382
700 KING QUAD	05-07	2202874
500 VIKING 4X4 (ALL)	02-07	2202387
400 KING QUAD	08-09	2202895
400 EIGER (ALL)	02-07	2202387
450 KING QUAD	07-08	2202874
620 4X4 QUV	05	2202868

YAMAHA	Year	SW Part #s
700 GRIZZLY 4X4 (ALL)	07-08	2202883
660 GRIZZLY 4X4	02-08	2202383
550 GRIZZLY (ALL)	09	2202883
450 GRIZZLY 4X4	07-08	2202855
450 KODIAK 4X4	03-06	2202855
400 BIG BEAR 4X4	07-09	2202886
400 BIG BEAR 4X4	00-06	2202377
400 KODIAK 4X4	03-05	2202855
400 GRIZZLY 4X4	07	2202855
350 GRIZZLY 4X4	07-08	2202855
350 BRUIN 350 4X4	04-06	2202855
WOLVERINE 350 2X4	07	2202896
WOLVERINE 350 4X4	95-05	2202365
RHINO (ALL) (ALSO ACCEPTS UTV4000)*	04-09	2202888



CRANE SERIES WINCHES

COMMERCIAL PLANETARY WINCHES

Earning the 5:1 Safety Factor rating, our C1000 is the right winch to safely lift and move materials. Rated to 1,000 pounds (454 kg), its steel spring tension plate, power forward and reverse, and full-load mechanical brake ensure secure, easy, and smooth operation.

The Crane Series Advantage

5:1 Safety Factor ensures operator safety while lifting and moving loads.

Differential Planetary gear design delivers power, and durability.

15' switch on a handheld rubber cord is included (03002).

Sturdy 1.8 hp motor includes weather resistant cover.

Note: crane winches do not include wire rope.



CareWinches

1000 lb
(454 kg)

Utility
& Multi



Standard Features

- 12VDC/ 24VDC/ Roller Fairlead
- Full metal, Differential Planetary Gear-train
- Wire Rope Tensioning Plate
- High efficiency 1.8 hp
- Full Load Mechanical Brake
- Twin Wire Rope Set Screws

Recommended Accessories

- Accessory Kit 1554
- Pulley Block 2227A
- 1" x 8' Tree-saver Strap 2302284
- Bow Shackles 2302285
- Wire Rope 1/4" x 50' (6.4mm x 15.2m) 1577A

03000 12VDC With Roller Fairlead and Motor Cover

03001 12VDC With Roller Fairlead (No Motor Cover)

03002 12VDC With Roller Fairlead Motor Cover and 15' Handheld Remote

03003 12VDC With Mountable Solenoid and Handheld Switch

03010 24VDC With Roller Fairlead, Motor Cover and Handheld Switch



Specifications C1000

Rated Line Pull	1000 lb (454 kg) Bottom Layer
Motor	1.8 hp (1.34kW)
Wire Rope	NONE
Mounting Bolt Pattern	2 Hole, 3.69" (93.7mm) on center
Installed Weight	33 lb (15 kg) Winch

Performance 12VDC (Bottom layer on drum)

Line Pull lb	Line Pull (kg)	Motor AMPS	Line Speed FFM	Line Speed (M/m)
0	0	20	16.5	(5.0)
500	(227)	50	14.0	(4.2)
1000	(454)	80	12.3	(3.7)

Performance 12VDC (Bottom layer on drum)

Line Pull lb	Line Pull (kg)	Motor AMPS	Line Speed FFM	Line Speed (M/m)
0	0	10	16.5	(5.0)
500	(227)	25	14.0	(4.2)
1000	(454)	40	12.3	(3.7)

This unit may be mounted in either a horizontal or vertical position, on a wall or other suitable support. In all installations, the unit must be mounted so that the wire rope feeds through the hawse or roller fairlead on the front of the winch and does not rub across the housing or base.

03002

12VDC With Roller Fairlead, Motor Cover and 15' Handheld Remote

Note: This winch has a 5:1 Safety Factor



03000

12VDC With Roller Fairlead and Motor Cover

Note: This winch has a 5:1 Safety Factor



AC1500 1500 lb (361 kg)
AC2000 2000 lb (907 kg)
AC3000 3000 lb (361 kg)

**Utility
&Multi**



For winching applications where AC power is the only option, look to Superwinch's AC products. Our AC1500 and 1000 winches have been designed to perform with power on standard household current, while the 2000 and 3000 models operate on 115-208-230 V AC 60hz single phase current. The 1,000 pound winches have a maximum amp draw of just 10 amps at rated load, and our AC2000 and AC3000 winches draw fewer than 17 amps from direct-wired source.

Standard Features AC2000 and AC3000

- AC2000 and AC3000 operate on 115/208-230V AC 60hz single phase current.
- Differential planetary gear design ensures smooth, safe operation.
- Our AC winches meet CSA standards and are rated for a 5-to-1 Safety Factor.

Standard Features AC1500

- AC1500 and 1000 winches operate on standard house current: 115V AC 50/60 hz.
- Freespooling (AC1500)
- AC1000 pound winches have maximum amp draw of 10 amps at rated load.
- Differential planetary gear design ensures smooth, safe operation.
- Our AC2000 & AC3000 winches meet CSA standards and are rated for a 5-to-1 Safety Factor.

Specifications

Pated Line Pull AC3000	3000 lb (1361 kg) Bottom Layer
Pated Line Pull AC1500	1500 lb (680 kg) Bottom Layer
Motor AC3000	1 hp Capacitor Start TEFC
Motor AC1500	0.6 hp
Wire Rope AC3000	5/16" (7.9mm) x 100' (30.5m)
Wire Rope AC1500	3/16" (4.8mm) x 35' (10.6m)
Mounting Bolt Pattern AC1500	2-hole 3.9"/ on center (99.3mm)
Mounting Bolt Pattern AC2000	4-hole 6.89" x 7" (175mm x 177.8mm)
Mounting Bolt Pattern AC3000	4-hole 6.89" x 7" (175mm x 177.8mm)
Installed Weight AC3000	22 lb (10.0 kg) Winch & Rope
Installed Weight AC1500	91 lb (41.6 kg) Winch & Rope
Installed Weight AC1500	91 lb (41.6 kg) Winch & Rope

Performance 115 VAC (1st layer on drum)

Line Pull	Motor Amp Draw	Line Speed
AC3000: 3000 lbs (1361 kg)	16.5 115V (9.1 208V) (8.3 230V)	10.3 FPM (3.1 M/M)
AC1500: 1500 lbs (680 kg)	10.0 115V	7.2 FPM (2.2 M/M)

AC3000 & AC2000
 3,000 lb./1361 kg & 2,000 lb./907 kg

Note: This winch has a 5:1 Safety Factor



AC3000 - 1730000
 115/208-230V AC 60 hz single phase with Switch and Wire Rope

AC2000 - 1723
 115/208-230V AC 60 hz single phase with Switch and Wire Rope

Note: Requires mounting plate to mount roller or hawse fairlead.



AC1500
 1,500 lb./680 kg

1715000
 115V 50/60 hz single phase with Switch and Wire Rope



www.superwinch.com



AC1000 and SAC1000

1000 lb (454 kg)

Utility
& Multi



Standard Features AC1000

- Power In and Power Out
- 6' (1.82m) Control Pendant
- Operates on Standard House Current
- Handsaver
- Wire Rope Tensioning Plate

Standard Features SAC1000

- Power In and Power Out
- Wire Rope Tensioning Plate
- 6' (1.82m) Control Pendant
- Operates on Standard House Current
- Handsaver
- Full Load Mechanical and Dynamic Brake
- Hawse or Roller Fairlead

Recommended Accessories AC1000 & SAC1000

- Pulley Block 2227A
- Roller Fairlead AC1000 1560A
- Roller Fairlead SAC1000 2235
- Accessory Kit 1554

Recommended Accessories AC1500

- Pulley Block 2227A
- Roller Fairlead AC1500 1560A
- Accessory Kit 1554

Recommended Accessories AC2000 & AC3000

- Clevis Hook with Latch 90-20435

Specifications

Fated Line Pull	1,000 lb (454 kg) Bottom Layer
Motor	0.6 hp
Wire Rope AC1000	5/32" (3.9mm) x 45' (13.7m)
Wire Rope SAC1000	3/16" (4.8mm) x 50' (15.2m)
Mount Bolt Pattern AC1000	2-hole 3.9" / on center (99.3mm)
Mount Bolt Pattern SAC1000	2-hole 3.69" / on center (93.7mm)
Installed Weight AC1000	18 lb (8 kg) Winch & Rope
Installed Weight SAC1000	33 lb (15 kg) Winch & Rope

Performance 115VAC (1st layer on drum)

Line Pull	Motor Amp Draw	Line Speed
AC1000: 1,000 lbs (454 kg)	10.0 115V	13.0 FPM (4.0 M/M)
SAC1000: 1,000 lbs (454 kg)	10.0 115V	9.2 FPM (2.8 M/M)

AC1000

1,000 lb./454 kg

1401
115V/AC50/60 hz



SAC1000

1,000 lb./454 kg

01000, 01001, 01002
115V/AC50/60 hz With Freespooling
and Hawse or Roller Fairlead



Note: This winch has a 5:1 Safety Factor

Accessories

Bow Shackles

- 2538** Heavy-duty steel large capacity
2302285 ATV Heavy-duty steel shackles



Recovery Straps

- 2517** 2" x 20' strap; 15,600 lb.
2518 2" x 30' strap; 15,600 lb.
1509 2" x 6' strap; 15,600 lb.
2531 3" x 8' strap; 23,500 lb.
2302284 1" x 8' ATV strap; 8,000 lb.



Chains with Grab Hooks

- 2541** 10' x 3/8" Chain



Pulley Blocks

- 2227A** 8000 lb Pulley Block for EX1, X1, X2, S3000, S4000, T1500 and all ATV winches
2229A 10,000 lb Pulley Block for X3 and S5000 (not for Husky, X9 or S9000)
2212A 12,000 lb Pulley Block for X6 and S6000 (not for Husky, X9 or S9000)
7750A 20,000 lb Heavy Duty Pulley Block for X9, S9000, EP, EP1 and Husky winches



Built to Last!

Clevis Hook

- 90-20435** Latched Clevis Hook for X6CD, X9, S6000 and S9000 winches



Gunnebo™ Hook

- 90-24511** Latched Clevis Hook for new synthetic EP19.0S and Rock 95



Replacement Wire Rope

For all winch models, only from Superwinch! Quality galvanized steel wire rope to resist corrosion and includes thimble steel channel that holds wire rope in a wide curve, protecting it from wear.



Replacement Wire Rope sizes

P/N	Wire Rope Length/Diameter	Winch Model
90-33473	7/16" x 90' (11.1mm x 27.4m)	EP16.5
90-33472	3/8" x 125' (9.5mm x 38.1m)	EP12.5
90-20506	21/64" x 100' (8.3mm x 30.5m)	EP9.0
90-20506	21/64" x 100' (8.3mm x 30.5m)	EP6.0
90-20515	21/64" x 125' (8.3mm x 38.1m)	EP9.0
90-20515	21/64" x 125' (8.3mm x 38.1m)	EP16.0
2537	3/8" x 90' (9.5mm x 27.4m)	Husky 10
2562	5/16" x 150' (7.9mm x 45.7m)	Husky 8.5
1580	5/16" x 100' (7.9mm x 30.5m)	X9
1580	5/16" x 100' (7.9mm x 30.5m)	X6
90-12870	5/16" x 94' (7.9mm x 29.0m)	LP8500
1577A	1/4" x 50' (6.4mm x 15.2m)	S5000
1514A	7/32" x 60' (5.6mm x 18.2m)	S4000
1511C	3/16" x 60' (4.8mm x 18.2m)	S9000
1511F	3/16" x 50' (4.8mm x 15.2m)	GP3000
1535C	5/32" x 60' (3.9mm x 18.2m)	GP2300
1511F	3/16" x 40' (4.8mm x 12.0m)	UT3000
87-19019	3/16" x 50' (4.8mm x 15.2m)	ATV8000
87-19019	3/16" x 50' (4.8mm x 15.2m)	ATV2500
87-19039	7/32" x 50' (5.5mm x 15.2m)	UTV4000
1513	7/32" x 40' (5.6mm x 12.2m)	X2
1511	3/16" x 25' (4.8mm x 7.5m)	X1
1535	5/32" x 25' (3.9mm x 7.6m)	EX1
1535C	5/32" x 50' (3.9mm x 15.2m)	T2000
1535C	5/32" x 50' (3.9mm x 15.2m)	LT2000

The Superwinch Thimble

Protects wire rope from wear and tear, extends wire rope life.



Portable Winch Mounts

- 1559B** 2" Class III Receiver Hitch Mount



- 2060** Ball Hitch Mount
 Fits: LT2000
 S Series
 GP Series



- 2055** Small 2 bolt pattern Cradle Hitch Mount
 Fits: LT2000
 S5000
 S4000
 S3000



- 2050** Large 4 bolt pattern Cradle Hitch Mount
 Fits:
 All winches with 10" x 4.5" hole pattern, up to 9000 lb



Receiver Shackle Bracket

- 2546** Fits all Standard Class III Receiver Hitches



Roller Fairleads

- 2549** Fits X6, X9, S6000 and S9000 winches, 11" x 3 3/4"



- 1560A** Fits EX1, X1, X2, X3, T1500 and ATV2000 winches



- 1560C** Fits all GP and T Series winches

- 2343** Fits ATV1800, ATV2300 and ATV3000 winches, with Bracket



- 2235** Fits S Series winches, 5 1/4" x 3 1/4"

- 8584** Fits all Husky winches

- 2349** Heavy Duty Roller Fairlead Kit
 Fits ATV1800, ATV2300 and ATV3000



Accessories

Switches

2302277 Convert direct switching to handlebar mount Roggle switch and sealed solenoid. Fits T, ATV, EX1, X1 and X2 winches



2233B Rocker switch



1519A Repair Switch with 3 ft. Wire Pigtail fits T1500, S and X Series with direct switches



1501B Dash Mount kit fits all X Series, EX1, X1 and X2 Series winches



1591 Three position heavy duty rotary switch for remote switching of EX1-X2F, S2500 & S3500 Power Drives



2270 15' Handheld Switch



2271 30' Handheld Switch



Quick Connects

1551 Fits winches up to 4,000 lbs. Fits 6-10 AWG Wire

2236 Fits winches 5,000 - 9,000 lbs. Fits 2-4 AWG Wire



Wiring Kits

1520 Trailer Wiring Kit - Fits EX1, X1, X2, X3, S3000, and S4000 winches



2008 Trailer Wiring Kit - Fits 5000 to 16,500 lb. winches with 25' Lead



2007 Front Wiring Kit - Fits 5000 to 16,500 lb. winches with 5' Lead



2302283 Solenoid Relocation Kit allows you to relocate the solenoid or solenoid control pack



For 6000 and 9000 lb winches that have removable Solenoid pack

Hawse Fairleads and Synthetic Rope Replacement

90-24507 Aluminum Hawse Fairlead for EP9.OS



90-24506
80' Synthetic Rope



90-24509 Aluminum Hawse Fairlead for ROCK95



90-24510
50' Synthetic Rope



Small Accessory Kit

1554 10,000 lb. Pulley Block
Nylon Sling
Nylon Carry Bag
Heavy Duty Leather Palmed Gloves



Large Accessory Kit

2224 20,000 lb. Pulley Block
2 Bow Shackles
Nylon Sling
Nylon Carry Bag
Heavy Duty Leather Palmed Gloves



ATV Accessory Kit

2303386 8,000 lb. Pulley Block
1 Bow Shackles
1" x 8' Tree-saver
Strap Canvas Carry Bag
Heavy Duty Leather Palmed Gloves



Vinyl Winch Covers

2302305 Fits EP1 6 and EP1 9 winches

1566 Fits X6, X9 and Husky winches

1505 Fits X3, X3F, S3000, S4000 and S5000 winches (not Shown)

1504 Fits EX1, X1 and X2 winches

1566



2302305



1504

Never use a winch to lift or move people.
Never use a winch as an overhead hoist or to suspend a load.

GRADE Mounting Kits



WINCH + CRADLE + RECEIVER = SYSTEM

"SuperMount"

The Portable Front & Rear
Mounting Solution.



Easy On,
Easy Off
Installation.



P/N 2050

Fits 6000 & 9000 lb.
winches
(winch not included)



P/N 2055

Fits X & S Series winches
up to 5000 lbs.
(winch not included)

SuperMount has installation and safety advantages others don't.

You're off the road, not off your rocker. So the mounting system you select has to perform and be practical. That's why your mounting system should be the portable SuperMount from Superwinch, your self recovery specialists.

We make it easy. Maybe you'll bury your front end in mud today. You may prefer driving without your winch tomorrow. SuperMount not only provides a strong and stable winching platform, its special design makes it easy for one person to quickly install or remove the entire mount.

Here's why. The system is made up by selecting your winch, cradle and front receiver (all sold separately). Simply place the cradle in the Class III receiver, and pin. Now your winch is ready to roll on cars, side-by-sides, pickups, trucks, vans, and RVs.

When conditions call for rear winching, SuperMount quickly plugs into any standard 2" Class III receiver hitch. Such versatility isn't just nice, it's essential when front and rear mounting options are the only thing between you and being stuck for the night.

We make it strong. Where you're headed, strength counts. That's why SuperMount's heavy duty custom winch mounting system is painstakingly crafted to strict standards of quality in materials and performance. Constructed of high strength steel and securely fastened with corrosion resistant steel locking pins.

Mounted from the front or rear of your vehicle, SuperMount securely handles the maximum hitch rating of line pull for effective winching.

The SuperMount system is compatible with all Superwinch models EX1 through S9000 (not Husky) to make a complete, affordable portable winching system that promises convenience, safety, and great looks.

Wire Kits

2007 Front Wiring Kit
Fits Models 5000 to
16,500 lb. capacities

2008 Trailer Wiring Kit
Fits Models 5000 to
16,500 lb. capacities



www.superwinch.com

Customer Service

800-323-2031



MAKE/MODEL	YEAR	PART NUMBER	LINE PULL RATING	VERTICAL LOAD
CHEVROLET/GMC TRUCKS, VANS & SPORT UTILITY VEHICLES				
BLAZER/JIMMY - Full Size	92-94	65005A ^{3,4}	9000	500
BLAZER/JIMMY - Downsize, 4 Door	95-05	65020A	9000	300
BLAZER/JIMMY - Downsize, All models	95-05	65004A	9000	300
EXPRESS VAN/SAVANA VAN - Full Size	96-02	65016A ²	9000	500
EXPRESS VAN/SAVANA VAN - RV Outaway Only	03	65016A ²	9000	500
PICKUP C SERIES - 2 Door Regular & Extended Cabs, 2WD	88-00	65021A ⁴	9000	500
PICKUP C SERIES - 4 Door Crew Cab, 2WD	92-00	65021A ⁴	9000	500
PICKUP C/K SERIES - 2 Door Regular & Extended Cabs, 2WD	88-00	65005A ^{3,4}	9000	500
PICKUP K SERIES - 4 Door Crew Cab, 4WD	92-00	65005A ^{3,4}	9000	500
PICKUP SILVERADO/SIERRA - 1500 LD, 2 & 4WD (except Denali)	99-06	65023A	9000	500
PICKUP SILVERADO/SIERRA - All 2500 & 3500 Series, 2 & 4WD	99-07	65028A	9000	500
PICKUP SILVERADO/SIERRA - 1500 HD	01-07	65028A	9000	500
S-10 BLAZER PICKUP/S-15 JIMMY PICKUP - Downsize, 4 Door	94	65020A	9000	300
S-10 PICKUP/S-15 & SONOMA PICKUP - 2WD	83-04	65020A	9000	300
S-10 PICKUP/S-15 & SONOMA PICKUP - 4WD, 7R2, Highrider & 2WD models	94-04	65004A ²	9000	300
SONOMA GT	92-93	65020A	9000	300
SUBURBAN CHEVY & GMC - Old Body Style (not 2500/3500 2WD C Series w/8 lug wheels)	92-99	65005A ^{3,4}	9000	500
SUBURBAN CHEVY & GMC - Old Body Style (2500/3500 2WD C Series w/8 lug wheels only)	92-99	65021A ⁴	9000	500
SUBURBAN CHEVY - 1500 Series, 2 & 4WD	00-06	65023A	9000	500
SUBURBAN CHEVY - 2500 Series, 2 & 4WD	00-06	65028A	9000	500
TAHOE/YUKON - Old Body Style	95-00	65005A ^{3,4}	9000	500
TAHOE/YUKON - 1500 Series, 2 & 4WD	00-06	65023A	9000	500
TRAILBLAZER - Downsize, 4 Door	99-01	65020A	9000	500
TRAILBLAZER - Downsize, All models	99-01	65004A	9000	500
YUKON DENALI - 1500 Series, 2 & 4WD	01-06	65023A	9000	500
YUKON XL - 1500 Series, 2 & 4WD	00-06	65023A	9000	500
YUKON XL - 2500 Series, 2 & 4WD	00-06	65028A	9000	500
YUKON XL DENALI - 1500 Series, 2 & 4WD	01-06	65023A	9000	500
YUKON XL DENALI - 2500 Series, 2 & 4WD	01-06	65028A	9000	500
DODGE TRUCKS, VANS & SPORT UTILITY VEHICLES				
DAKOTA PICKUP	00-04	65029A *	9000	300
DURANGO	00-03	65029A *	9000	300
PICKUP, RAM SPORT	95-99	65003A ^{4,*}	9000	300
PICKUP, RAM FULL SIZE	94-01	65003A ^{4,*}	9000	300
PICKUP, RAM FULL SIZE - 2500/3500 Only	02	65003A ^{4,*}	9000	300
FORD/LINCOLN/MERCURY TRUCKS, VANS & SPORT UTILITY VEHICLES				
ECONOLINE VAN - All Models including RV Outaway	91-07	65001A	9000	500
EXCURSION	00-05	65022A	9000	500
EXPEDITION/NAVIGATOR	EXPEDITION 97-02 NAVIGATOR 98-02	65025A	9000	500
EXPLORER	91-94	65017A *	9000	300
EXPLORER/MOUNTAINEER - All (except Limited)	95-98	65002A ²	9000	300
EXPLORER/MOUNTAINEER	99-01	65026A	9000	300
F-150 - Styleside, Flareside, All models	92-96	65011A ^{2,*}	9000	500
F-150 - Lightning Pickup	93-95	65011A ^{2,*}	9000	500
F-150 HERITAGE - Styleside, Flareside (Old Body Style)	04	65025A	9000	500
F-150 SUPERCREW	00-03	65025A	9000	500
F-150, F250 LIGHT DUTY - Styleside, Flareside	97-98	65006A ^{3,4,*}	9000	500
F-150, F250 LIGHT DUTY - Styleside, Flareside	99-03	65025A	9000	500
F-250, F350 - Styleside, All models, 2WD Diesel	92-96	65014A *	9000	500
F-250, F350 - Styleside, All models, 4WD	92-96	65015A *	9000	500
F-250, F350 HEAVY DUTY - 2WD Diesel Only	97	65014A *	9000	500
F-250, F350 HEAVY DUTY - 4WD Only	97	65015A *	9000	500
F-250, F350 SUPER DUTY	99-07	65022A	9000	500
F350 SUPER DUTY CAB & CHASSIS - 34" wide frames	99-07	65022A	9000	500
F450, F550 SUPER DUTY CAB & CHASSIS - 34" wide frames	99-07	65022A	9000	500
RANGER PICKUP	89-97	65017A ^{9,*}	9000	300
RANGER PICKUP	98-00	65019A ^{11, 12}	9000	300
ISUZU TRUCKS, VANS & SPORT UTILITY VEHICLES				
HOMBRE - 2WD	96-00	65004A ²	9000	300
HOMBRE - 4WD	00	65020A	9000	300
JEEP TRUCKS, VANS & SPORT UTILITY VEHICLES				
CHEROKEE - Downsize, All models (not Grand Cherokee)	84-01	65009A ⁴	9000	300
COMANCHE	86-92	65009A ⁴	9000	300
GRAND CHEROKEE	93-98	65008A ^{5,*}	9000	300
GRAND WAGONER	93	65008A ^{5,*}	9000	300
TJ - Canada	97-06	65010A ^{2,*}	9000	300
YJ - Canada	87-95	65010A ^{2,*}	9000	300
WAGONER - Downsize, All models (not Grand WAGONER)	84-90	65009A ⁴	9000	300
WRANGLER	87-06	65010A ^{2,*}	9000	300
MAZDA TRUCKS, VANS & SPORT UTILITY VEHICLES				
NAVAJO	91-94	65017A ^{9,*}	9000	300
PICKUP B SERIES	89-97	65017A ^{9,*}	9000	300
PICKUP B SERIES	98-00	65019A ^{11, 12}	9000	300
OLDSMOBILE TRUCKS, VANS & SPORT UTILITY VEHICLES				
BRAVADA - 4WD	96-01	65004A ²	9000	300
BRAVADA - Downsize, 4 Door 2WD	96-01	65020A	9000	300
TOYOTA UTILITY VEHICLES				
SEQUOIA	01-07	65031A	9000	500
TUNDRA	00-06	65031A	9000	500

FOOTNOTES

- * Uses all existing holes, no drilling required
- 2 Minor fascia trimming required
- 3 License plate relocation required to install hitch
- 4 Requires 2" x 2" section of fascia removed or removal of entire fascia to install hitch
- 5 Rubber air deflector must be removed to install hitch
- 6 Does not fit Limited
- 7 2500 & 3500 Pickup & Suburban 4WD models only
- 8 Extensive fascia cutting required
- 9 Extensive fascia cutting required on 93-97 models w/fog lamp option
- 10 Extensive fascia cutting required on sport models
- 11 Minor fascia trimming required on 2WD models
- 12 Available while supplies last

Never use a winch to lift or move people.
Never use a winch as an overhead hoist or to suspend a load.

Winch Mounting Solutions



JK Jeep Mount Plate

PN 2302291 - Fits EP19.0S, Rock 95, EP6.0, EP9.0, EP16.0, EP19.0, X6, X9, S6000 and S9000 winch models

Designed to attach directly to TJ frame rails to ensure adequate support for winching activities. Made of 1/4" steel with black powdercoat finish to resist corrosion. Standard 4.5" X 10" winch bolt pattern. Includes mounting hardware.



2302291

TJ Jeep Mount Plate

PN 2302290 - Fits EP19.0S, Rock 95, EP6.0, EP9.0, EP16.0, EP19.0, X6, X9, S6000 and S9000 winch models

Designed to attach directly to TJ frame rails to ensure adequate support for winching activities. Unique design provides adequate clearance above stabilizer bar. Made of 1/4" steel with black powdercoat finish to resist corrosion. Includes mounting hardware.



2302290

YJ Jeep Mount Plate

PN 2302289 - Fits EP19.0S, Rock 95, EP6.0, EP9.0, EP16.0, EP19.0, X6, X9, S6000 and S9000 winch models

Designed to attach directly to YJ frame rails to ensure adequate support for winching activities. Made of 1/4" steel with black powdercoat finish to resist corrosion. Includes mounting hardware.



2302289

CJ Jeep Mount Plate

PN 2302288 - Fits EP19.0S, Rock 95, EP6.0, EP9.0, EP16.0, EP19.0, X6, X9, S6000 and S9000 winch models

Designed to attach directly to CJ frame rails to ensure adequate support for winching activities. Made of 1/4" steel with black powdercoat finish to resist corrosion. Standard 4.5" X 10" winch bolt pattern. Includes mounting hardware.



2302288

Superwinch's newly designed Jeep Mount Plates for the JK, CJ, YJ, and TJ models are what every Jeep owner has been waiting for. They are easy to mount for the do-it-yourself enthusiast and add rugged support so you can tackle the toughest terrain.



Jeep, Toyota, Land Rover and Ford Bumper Mounts

Fits EP19.0S, Rock 95, EP6.0, EP9.0, X6, X9, LP8500 and Husky winches



Heavy duty replacement bumpers from Superwinch are as good looking as they are tough. Thermally bonded black powder coat, one-piece construction delivers strength and performance.



www.superwinch.com



Freedom Switch Wireless Systems

Superwinch's Freedom Switch™ Wireless Remote Control systems enable wireless winch operation from up to 150 feet away. Designed to work with any 12 volt solenoid-switched Superwinch winch model or Power Drive, these systems are designed for quick installation and easy wireless operation. Choose from four separate systems, each complete with instructions. All are FCC and IC approved.



P/N 06212

Fits Superwinch ATV3000, ATV2300 and ATV1800
Includes Power Distribution Module, Antenna, Two Remote Transmitters, all wiring and hardware.

06212




P/N 06702, 06302


Fits Superwinch Models with solenoids
06702 for models with a 7-pin plug connector
06302 for models with a 4-pin plug connector
Includes Power Distribution Module, Antenna, Two Remote Transmitters and Wire Harness.



06702, 06302



06702 7-Pin Plug connector



06302 4-Pin Plug connector

P/N 06402

For use with 12V DC Superwinch Power Drives

06402



Ideal for ATV's



Safe and flexible for recovery trailer operation



Operate tarp drives from up to 150' distances

PREMIUM HUBS

Fits most popular domestic
and import vehicles



Chevrolet/ GM/ Geo

Make/ Model	Year	Spline/ Bolt Count	Hub #	Ser. Kit	Caution Notes
Blazer/ Jimmy/ Suburban	69-91	19 - Internal	400518	404518	A
1/2 Ton Pickup	69-87	19 - Internal	400518	404518	A
3/4 Ton Pickup	60-76	19-6	400517	404517	A
3/4 Ton Pickup	77-87	19 - Internal	400518	404518	A
1 Ton Pickup	76-91	30 - Internal	400439	404439	A
Geo Tracker	All	26 - 6	400538	404404	—

*All 1988 Chevrolet pickups are equipped with an automatic system which cannot be converted.

Dodge/ Chrysler

1/2 Ton Pickup	47-68	19 - 6	400517	404517	—
1/2 Ton Pickup & Ramcharger	69-75	19 - Internal	400518	404518	—
3/4 Ton Pickup	57-75	19 - 6	400517	404517	—
Power Wagon WC 50 & 60	42-56	16	400508	404408	—
D-50 Ram 50 4x4	82-93	28	400543	404401	—
Arrow, D-50 4x4	Thru 81	28	400528	404404	—
1/2, 3/4 Ton Pickup & Ramcharger	80-93	19 - Internal	400518	404518	—
3/4 Ton Pickup	90-93	30 - Internal	400439	404439	—
1 Ton Pickup (Dana 60)	90-93	30 - Internal	400439	404439	—
1 Ton Pickup (Dana 70)	80-93	30 - 8	400541		

*All 1994 Dodge/ Chrysler pickups are equipped with an automatic system which cannot be converted.

Ford

Bronco (not Bronco II)	66-96	19 - Internal	400518	404518	A, D
1/2 Ton F100 Pickup	59-86	19 - Internal	400518	404518	A
1/2 Ton F150 Pickup	59-96	19 - Internal	400518	404518	A, D
3/4 Ton F250 Pickup (D-44)	59-75	19 - Internal	400518	404518	A
3/4 Ton F250 Pickup (D-44HD)	63-77	19 - 6	400517	404417	A
3/4 Ton F250 Pickup (D-44)	78-86	19 - Internal	400518	404518	A
3/4 Ton F250 Pickup (D-60)	78-97	30 - Internal	400439	404439	A, D
1 Ton F350 Pickup	76-97	30 - Internal	400439	404439	A, D
Super Duty F 250 & F 350	00-04	30 - Internal	400439	404439	A
Ranger	90-97	27	400565	404565	G
Explorer	90-94	27	400565	404565	G

International-Harvester

Scout	60-71	10 - 6	400501	404401	—
Scout II, Terra, Traveler	72-80	27 - 6	400502	404401	—
1/2, 3/4 Ton Pickup	56-67	19 - 6	400517	404417	—
1/2 Ton Pickup	68-75	19 - Internal	400518	404518	—
Travel All	68-75	19 - Internal	400518	404518	—

Isuzu

4X4 Pickup	Thru 85	24 - 6	400522	404422	—
4X4 Pickup	72-80	24 - 6	400532	404432	—
Trooper I, II	83-86	24 - 6	400532	404432	—
Trooper II	87-99	17 - 6	400533	404432	E
Rodeo	91-99	17 - 6	400533	404432	E
Amigo	91-99	17 - 6	400533	404432	E

Jeep

CJ, Universal	42-71	10 - 6	400501	404401	B
CJ, Universal	72-80	27 - 6	400502	404401	—
CJ, Universal	81-86	27 - 5	400526	404426	—
J-10 Pickup	74-90	19 - Internal	400518	404518	C
J-20 Pickup	74-76	19 - 6	400517	404417	—
J-30 Pickup	77-90	19 - Internal	400518	404518	C
WAGONER, Cherokee, Gladiator	74-90	19 - Internal	400518	404518	C



Superwinch Premium Hub Advantage

- Easy and quick engagement-disengagement
- All-ways positive engagement
- Robust coil springs for reliability
- All metal construction
- Sealed to keep contaminants out
- Fit most popular domestic and import vehicles

Land-Rover					
Make/ Model	Year	Spline/ Bolt Count	Hub #	Ser. Kit	Caution Notes
Series I, IIA, III All W.B.	59-80	10 - 6	400405	404405	—
Series I, IIA, III All W.B.	81-93		400406	404406	—
Mitsubishi					
Montero	82-98	28 - 6	400543	404401	—
4X4 Pickup	82-94	28 - 6	400543	404401	—
Nissan					
Patrol	69-79	10 - 6	400507	404401	—
Patrol	80-87	29 - 6	400523	404410	—
4X4 Pickup	72-82	24 - 6	400524	404422	—
4X4 Pickup	83-86	26 - 6	400544	40444	—
4X4 Pickup W/4Cyl.	86 1/2-93	27 - 6	400529	40444	—
4X4 Pickup, Pathfinder W/6Cyl and Automatic Hubs (31 Spline)	Does not fit 86	31 - 6	400545	404441	—
Suzuki/ Geo					
Samurai, Sierra	82-94	26 - 6	400538	404404	—
Sidekick/Tracker All	All	26 - 6	400538	404404	—
Toyota					
Land Cruiser	78-97	6 - 6	400504	404404	—
Land Cruiser, Pickup	76-87	30 - 6	400519	404404	—
Pickup, 4 Runner	76-85	30 - 6	400521	404404	F
4X4 Pickup, 4 Runner (Exc. Tacoma)	86-95	26 - 6	400513	404403	F
Mid-Size Pickup T100	93-00	26 - 6	400513	404403	F
Van, Previa	86-94	26 - 6	400513	404403	F
Tacoma (W/ Factory Man. Hubs) Does not fit 98	95-00	26 - 6	400513	404403	—

4X2 Conversion Kits	Part #	Ser. Kit	Commercial Trucks and H.D. Axles	
Gear Set Only	900801	901801	Dana 25/27 Axle, 10 Spline	400501
Gear Set and Hub Set 400518	900802	901801	Dana 30 Axle, 27 Spline	400502
Gear Set and Hub Set 400517	900803	901801	Dana 44, Axle, 19 Spline (Internal)	400518
Gear Set and Hub Set 400439	900805	901801	Dana 44 HD Axle, 19 Spline (External)	400517
			Dana 60 Axle, 30 Spline (Internal)	400439
			Dana 70 Axle, 30 Spline (External)	400541

Parts	
334401	10/32 Tapered Bolt Qty. 1
334401-06	10/32 Tapered Bolt Qty. 6

CAUTIONARY FOOTNOTES:

- When replacing Fulltime 4WD (NP203 only) requires conversion kit (see chart)
- Very early vehicles may require that the threaded axle end be cut off.
- Not compatible with Quadra-Trac equipped models.
- When replacing automatic 3 hole cap screw hubs, one will need to convert their spindle nuts.
- One must obtain special snap ring (26 mm or 1 1/16).
- When replacing automatic hubs with manual hubs, one must also change their spindle nuts (Dealer item).
- When replacing automatic hubs with manual hubs, one must also change the spindle nuts:
PN 404465, available from Superwinch

HYDRAULIC SERIES WINCHES

SEVERE DUTY HYDRAULIC WINCHES

For tough winching applications, no product performs better than Superwinch hydraulic winches. Remember the same technical expertise invested in these commercial and military products goes into all Superwinch products. Choose Superwinch and you've hooked up with the industry leader.



The Hydraulic Series Advantage

The Superwinch line of hydraulic winches provides you with a continuous duty solution to your winching requirements.

They were designed with the toughest commercial/industrial applications in mind.

Available in a full range of planetary and worm gear drives with capacities from 8,000 to 30,000 pounds.

Our hydraulic winches are built to JAE 706 standards and are CE certified.

Most models are available with manual or pneumatic free spool, load holding brakes, and LCV to give you precise control of your load.

When the job is on the line look no further than Superwinch.





H8/H10P
 8000 lb (3630 kg)
 10,000 lb (4540 kg)



*The Superwinch **H8 and 10P** - heavy duty, **8,000 to 10,000 lbs.** capacity planetary drive hydraulic winch, engineered to ensure total reliability during recovery/winch operations. Designed to fill Vehicle Recovery Operators' need for a dependable unit for flat-bed application.*

Features

- Winch**
- Gearbox**
- Brake**
- Motor**
- Free Spooling**
- Drum**

Proven robust construction. Engineered to meet J706 Standards.
 High efficiency 2 stage planetary drive giving optimum reliability.
 Integral, automatic, fail safe.
 Rugged, high torque unit of proven reliability.
 Spring engaged, manual release for rapid rope pay-out, pneumatic option also available, adjustable freespool damper.
 Heavy duty fabricated steel, mounted on maintenance-free plain bearings.

STANDARD PART NUMBERS

- 5050A** H8P Winch, (short drum)
- 5060A** H8P Winch, (long drum)
- 5170A** H10P Winch, (short drum)
- 5178A** H10P Winch, (long drum)

CE PART NUMBER

- 5050** H8P Winch, (short drum)
- 5060** H8P Winch, (long drum)
- 5050S** H8P Winch Fitted with Load Control valve, (short drum)
- 5060S** H8P Winch Fitted with Load Control valve, (long drum)
- 5170** H10P Winch, (short drum)

OPTIONAL ACCESSORIES

- Roller Fairlead (short drum) 5600
- Roller Fairlead (long drum) 5610A
- Cable Tensioner (short drum) 5606
- Cable Tensioner (long drum) 5607
- Flat-Bed Mount Plate 5625
- Pneumatic Freespool 5603
- Pulley Block, 20,000lb/9100kg 7750A

STANDARD

CE APPROVED

- 5600
- 5600
- 5606
- 5607
- 5625
- 5603
- 7750A

Never use a winch to lift or move people.
 Never use a winch as an overhead hoist or to suspend a load.

H11/H13/H15P

11,000 lb (5000 kg)

13,000 lb (6000 kg)

15,000 lb (6800 kg)



The Superwinch H11/12/13/14/15P - heavy duty, high quality 11,000 to 15,000 lbs. capacity planetary drive hydraulic winch, engineered to ensure total reliability during recovery/winning operations. Designed to fill professional Vehicle Recovery Operators' need for a dependable, heavy duty unit for a wide range of applications.

Features

Winch
Gearbox
Brake
Motor
Free Spooling
Drum

Robust construction. Engineered to meet J706 Standards.
High efficiency 2 stage planetary drive for optimum reliability.
Integral, spring applied, hydraulic released, full load holding.
Rugged, high torque, low speed unit of proven reliability.
Pneumatic release for rapid rope pay-out.
Heavy duty steel, mounted on maintenance-free plain bearings.

STANDARD PART NUMBERS

5364 H11P Winch, Manual Freespool (short drum)
5366 H11P Winch, Manual Freespool (long drum)
5370 H13P Winch, Manual Freespool (short drum)
5372 H13P Winch, Manual Freespool (long drum)
5373 H13P Winch, Pneumatic Freespool (long drum)
5374 H15P Winch, Manual Freespool (short drum)
5376 H15P Winch, Manual Freespool (long drum)
5375 H15P Winch, Pneumatic Freespool (short drum)
5377 H15P Winch, Pneumatic Freespool (long drum)

CE PART NUMBERS

5330S H12P Winch, Manual Freespool (short drum)
5321S H12P Winch, Manual Freespool (long drum)
5322S H12P Winch, Pneumatic Freespool (short drum)
5323S H12P Winch, Pneumatic Freespool (long drum)
5330S H14P Winch, Manual Freespool (short drum)
5331S H14P Winch, Manual Freespool (long drum)
5332S H14P Winch, Pneumatic Freespool (short drum)
5333S H14P Winch, Pneumatic Freespool (long drum)

OPTIONAL ACCESSORIES STD. CE APPROVED

Roller Fairlead (short drum)	5610A	5610
Roller Fairlead (long drum)	5620A	5210
Cable Tensioner (short drum)	5637A	5637
Cable Tensioner (long drum)	5670A	5670



www.superwinch.com



H20P | H25P | H30P

20,000 lb (9080 kg)
25,000 lb (11340 kg)
30,000 lb (13610 kg)



*The Superwinch **H20P/25P/30P** - heavy duty, high quality 20,000 to 30,000 lbs. capacity planetary drive hydraulic winch, engineered to ensure total reliability during recovery/winch operations. Designed to fill the professional Vehicle Recovery Operators need for a dependable, heavy duty unit for a wide range of applications.*

Features

- Winch
- Gearbox
- Brake
- Motor
- Free Spooling
- Drum
- Load Control Valve

Robust construction, engineered to meet J706 standards.
 Heavy duty, high efficiency 2 stage planetary drive for optimum reliability.
 Multi-disc type, spring applied, hydraulic release, full load holding.
 Rugged, high torque, low speed unit of proven reliability.
 Spring applied, pneumatic release for rapid rope pay-out.
 Heavy duty cast drum, running on substantial roller bearings.
 Fitted as standard to ensure complete load control.

STANDARD PART NUMBERS

5440B	H20P Winch, Air Clutch
5450B	H25P Winch, Air Clutch
5460B	H30P Winch, Air Clutch
5440M	H20P Winch, Manual Freespool
5450M	H25P Winch, Manual Freespool
5460M	H30P Winch, Manual Freespool

OPTIONAL ACCESSORIES

Cable Tensioner

STANDARD

5683A

CE APPROVED

5683

CE PART NUMBERS

5440	H20P Winch, Air Clutch
5450	H25P Winch, Air Clutch
5460	H30P Winch, Air Clutch

H9W
 9000 lb (4082 kg)



*The Superwinch **H9W** - heavy duty, high quality **9,000 lbs.** capacity worm drive hydraulic winch, engineered to ensure total reliability during recovery/winning operations. Designed to perform in a wide range of applications.*

Features

**Winch
 Gearbox**

Compact size and robust construction.
 Heavy duty, steel centered aluminum bronze wormwheel and casehardened precision ground worm for optimum reliability.

**Brake
 Motor**

Irreversible worm set, for substantial reliable braking action.
 Rugged, high torque unit of proven reliability.

**Free Spooling
 Drum**

Manual release for rapid rope pay-out.
 Heavy duty fabricated steel assembly mounted on maintenance-free plain bearings.

STANDARD PART NUMBERS

8588A H9W Winch

CE PART NUMBER

8588 H9W Winch

8569 H9W Winch, (short drum)

OPTIONAL ACCESSORIES

Roller Fairlead (long drum)

Roller Fairlead (short drum)

Cable Tensioner

Pulley Block, 20,000 lb. (9,100kg)

STANDARD CE APPROVED

8584 8584

N/A 8978

5605 5605

7750A 256009



H10W H12W H14W

10,000 lb (4535 kg)

12,000 lb (5443 kg)

14,000 lb (6350 kg)



The Superwinch H10/12/14W - heavy duty, high quality 10,000-14,000 lbs. capacity worm and wormwheel drive hydraulic winch, engineered to ensure total reliability during recovery/winch operations. Designed to fill the professional Vehicle Recovery Operators' need for a dependable, heavy duty unit, for a wide range of applications.

Features

**Winch
Gearbox**

Robust construction. Engineered to meet J706 Standards. heavy duty, steel centered aluminum/bronze wormwheel and case hardened precision ground wormshaft for optimum reliability.

Brake

Irreversible wormgear for substantial, reliable braking action.

Motor

Rugged, high torque low speed unit of proven reliability.

Free Spooling

Manual release for rapid rope pay-out.

Drum

Heavy duty steel, mounted on maintenance-free bearings.

STANDARD PART NUMBERS

- 7085A H10W Winch
- 7086A H12W Winch
- 7080A H14W Winch

OPTIONAL ACCESSORIES

- Roller Fairlead
- Cable Tensioner
- Pneumatic Freespool Assembly

STANDARD

- 5620A
- 5609
- 5624

CE APPROVED

- 5620
- 5609
- 5624

CE PART NUMBER

- 7080 H14W Winch

POWER DRIVES

SEVERE DUTY WORM GEAR DRIVES



Superwinch Power Drives supply reliable power anywhere automation can provide a safer, more efficient method of executing tasks. Safely automating the movement of many types of home, commercial, and industrial equipment, our Power Drives are lightweight and self-contained. Ready to plug in, all Superwinch units carry both a cross pin hole and keyway for mating with rotary or linear application. From backyards to barns, stadiums to shipyards, Superwinch power is there.



Superwinch Power Drive Advantage

Ready to plug in, Superwinch Power Drives are lightweight and self-contained.


Over 2 million are already on the job wherever automation can provide safer, more efficient operation.

Drives are available with AC or DC power sources, single or dual output, and several gear ratios.

Long-life wear components and attached fit construction ensure strength and reliability.

All DC Power Drives include four magnet shoes for greater efficiency and longer runs.

online

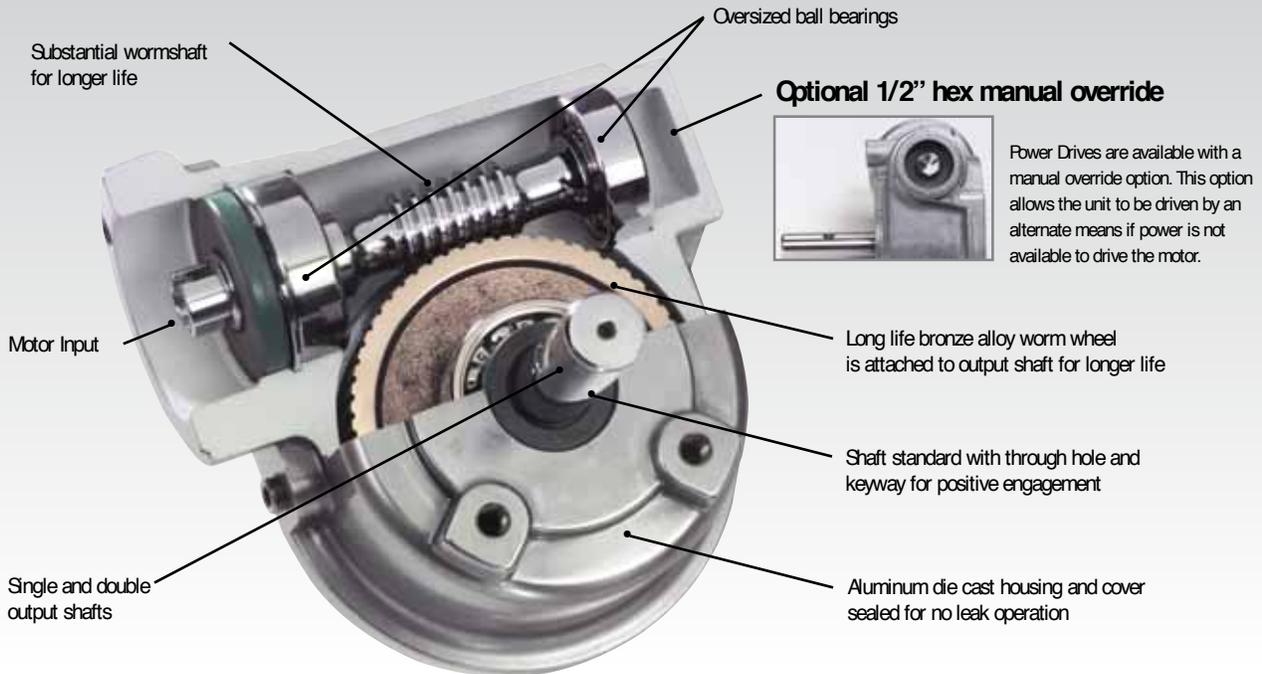


Power Drives are available with a manual override option. This option allows the unit to be driven by an alternate means if power is not available to drive the motor.



Double Output DC

Single Output DC

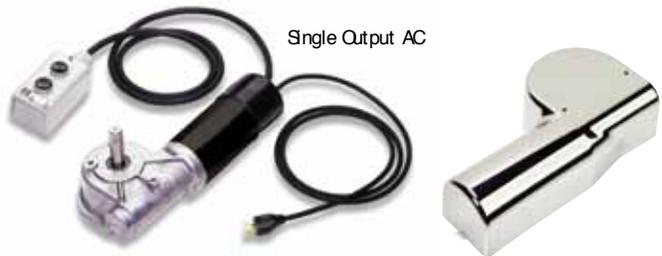

Single Output AC

60:1 Gear Ratio Single Output, 12 and 24V DC

P/N	DESCRIPTION
716527	POWER DRIVE, Single Output Shaft, 60:1, 12V DC, Torque: 750 (in.lb)
716627	POWER DRIVE, Single Output Shaft, 60:1, 12V DC, Torque: 1040 (in.lb)
716620	POWER DRIVE, Single Output Shaft, 60:1, 12V DC, Torque: 1040 (in.lb) with MOR
716537	POWER DRIVE, Single Output Shaft, 60:1, 24V DC, Torque: 750 (in.lb)
716727	POWER DRIVE, Single Output Shaft, 60:1, 12V DC, Torque: 1200 (in.lb)

60:1 Gear Ratio Single Output, 115 V AC

P/N	DESCRIPTION
716110	POWER DRIVE, Single Output Shaft, 60:1, 115V AC, Torque: 200 (in.lb) with MOR

*Rated torque at 60 seconds on-time
To get Newton meters multiply in.lb x .113*

Superwinch Power Drives supply reliable power anywhere automation can provide a safer, more efficient method of executing tasks.

90:1 Gear Ratio Single Output, 12 and 24V DC

P/N	DESCRIPTION
719527	POWER DRIVE, Single Output Shaft, 90:1, 12V DC, Torque: 790 (in.lb)
719520	POWER DRIVE, Single Output Shaft, 90:1, 12V DC, Torque: 790 (in.lb) with MOR
719627	POWER DRIVE, Single Output Shaft, 90:1, 12V DC, Torque: 1125 (in.lb)
719537	POWER DRIVE, Single Output Shaft, 90:1, 24V DC, Torque: 790 (in.lb)
719637	POWER DRIVE, Single Output Shaft, 90:1, 24V DC, Torque: 1125 (in.lb)
719632	POWER DRIVE, Single Output Shaft, 90:1, 24V DC, Torque: 1125 (in.lb)
719630	POWER DRIVE, Single Output Shaft, 90:1, 24V DC, Torque: 1125 (in.lb) with MOR

90:1 Gear Ratio Double Output, 12V DC

P/N	DESCRIPTION
729520	POWER DRIVE, Double Output Shaft, 90:1, 12V DC, Torque: 790 (in.lb) with MOR
729620	POWER DRIVE, Double Output Shaft, 90:1, 12V DC, Torque: 1125 (in.lb) with MOR

90:1 Gear Ratio Single Output, 115V AC

P/N	DESCRIPTION
719110	POWER DRIVE, Single Output Shaft, 90:1, 115V AC, Torque: 275 (in.lb) with MOR

MOR = Manual Override

Master Winch Application Guide

Husky 10

2404	12VDC
8548	12VDC (EU spec.)
2404A	12VDC w/ Roller Fairlead
2405	24VDC
8549	24VDC (EU spec.)

Husky 8

2401	12VDC
2401A	12VDC w/ Roller Fairlead
8512	12VDC (EU spec.) w/ Roller Fairlead

EP16.5

1516200	12VDC w/ Roller Fairlead
1516300	24VDC w/ Roller Fairlead

EP12.5

1512200	12VDC w/ Roller Fairlead
1512300	24VDC w/ Roller Fairlead

X9

1901	12VDC
1901C	12VDC w/Roller Fairlead
1902	24VDC
1902B	24VDC w/Roller Fairlead

X6CD

1646	12VDC
1646A	12VDC w/Roller Fairlead
1647	24VDC
1647A	24VDC w/Roller Fairlead

EP6.0

06032	12VDC w/Roller Fairlead
06033	24VDC w/Roller Fairlead

EP9.0

09032	12VDC w/Roller Fairlead
09033	24VDC w/Roller Fairlead

EP19.0S

09034SR	12VDC w/Alum Hawse & Synthetic Rope
---------	-------------------------------------

ROCK 95

09532FK	12VDC w/Alum Hawse & Synthetic Rope
---------	-------------------------------------

EP16.0

06034	12VDC w/Roller Fairlead
06035	24VDC w/Roller Fairlead

EP19.0

09034	12VDC w/Roller Fairlead
09035	24VDC w/Roller Fairlead

LP8500

1585200	12VDC w/Hawse Fairlead
1585201	12VDC w/Roller Fairlead & Mount Plate

S5000

1450200	12VDC w/Roller Fairlead
1450300	24VDC w/Roller Fairlead

S4000

1440200	12VDC w/Roller Fairlead
1440300	24VDC w/Roller Fairlead

S3000

1430200	12VDC w/Roller Fairlead
1430300	24VDC w/Roller Fairlead

Never use a winch to lift or move people.
Never use a winch as an overhead hoist or to suspend a load.

GP3000

1330200	12VDC w/Roller Fairlead
1330222	12VDC (EU Spec.) w/Roller Fairlead

GP2300

1323200	12VDC w/Roller Fairlead
---------	-------------------------

UTV4000

1140200	12VDC w/ Roller Fairlead
---------	--------------------------

ATV3000

1130210	12VDC w/ Roller Fairlead
---------	--------------------------

ATV2500

1125200	12VDC w/ Roller Fairlead
---------	--------------------------

LT2000 ATV

1120210	12VDC w/Roller Fairlead Handlebar switch & Rigging Tools
---------	---

EX1

1110	12VDC w/Removable Switch
------	--------------------------

X2 & X2F

1201	12VDC w/Removable Switch
1208	12VDC w/Removable Switch & Freespooling
1213	24VDC w/Removable Switch
1215	24VDC w/Removable Switch & Freespooling

X1 & X1F

1101	12VDC w/Removable Switch
1181	12VDC w/Removable Switch & Freespooling
1117	24VDC w/Removable Switch

LT2000

1220210	12VDC Freespooling
---------	--------------------

UT3000

1331200	12VDC w/Roller Fairlead Mount Plate & Switch
---------	--

C1000

03000	12VDC w/Roller Fairlead and Motor Cover
03001	12VDC w/Roller Fairlead and No Motor Cover
03002	12VDC w/Roller Fairlead, Motor Cover and 15' Handheld Remote
03003	12VDC w/Roller Fairlead and 1515A Remote Solenoid System
03010	24VDC w/Roller Fairlead, Motor Cover and 15' Handheld Remote

AC3000

1730000	115/208 – 230V AC 60hz single phase with Switch and Wire Rope
---------	---

AC2000

1723	115/208 – 230V AC 60hz single phase with Switch and Wire Rope
------	---

AC1500

1715000	115/208 – 230V AC 60hz single phase with Switch and Wire Rope
---------	---

AC1000

1401	115V AC 50/60hz
1406	115V AC 50/60hz w/Freespooling

SAC1000

01000	115V AC 50/60hz w/Freespooling and Hawse Fairlead
01001	115V AC 50/60hz w/Freespooling and Roller Fairlead
01002	115V AC 50/60hz without Freespooling and Hawse Fairlead



The best protection in the business!

Superwinch proudly stands behind its products with the industry's best warranties. We have implemented an exclusive 3-year Warranty on our robust S³ Solenoid. While most manufacturers use off-the-shelf solenoids designed for automotive use, the S³ Sealed Submersible Solenoid was designed by Superwinch engineers to outperform other solenoids on the market. Combined with the Superwinch commitment to quality, these new warranty enhancements give owners greater protection for their investment and unwavering confidence in their purchase.



Limited Lifetime Warranty

Superwinch, Inc., warrants to the original retail buyer only that the mechanical components of all genuine SUPERWINCH® Winch Models shall be free from defects in materials and workmanship from the provable date of purchase of the new Product for the lifetime of the winch, the electrical components shall be free from defects in materials and workmanship for one (1) year and the S³ solenoid for three (3) years from the provable date of purchase. Any Product that Superwinch determines to be defective will be repaired or replaced at Superwinch's sole discretion without charge to Buyer upon Buyer's compliance with these procedures. Seller or its Authorized Agent may make reasonable charges for parts and labor for repairs not covered by this Limited Warranty.



Limited Lifetime Warranty

Superwinch, Inc., warrants to the original retail buyer only that the mechanical components of all genuine SUPERWINCH® Winch Models shall be free from defects in materials and workmanship from the provable date of purchase of the new Product for the lifetime of the winch, the electrical components shall be free from defects in materials and workmanship for one (1) year. Any Product that Superwinch determines to be defective will be repaired or replaced at Superwinch's sole discretion without charge to Buyer upon Buyer's compliance with these procedures. Seller or its Authorized Agent may make reasonable charges for parts and labor for repairs not covered by this Limited Warranty.



Limited Two-year Warranty

Superwinch, Inc., warrants to the original retail buyer only that mechanical components of the genuine SUPERWINCH® Winch Model shall be free from defects in materials and workmanship for (2) two years and electrical components for (1) one year from the provable date of purchase. Any Product Superwinch determines to be defective will be repaired or replaced at Superwinch's sole discretion without charge to Buyer upon Buyer's compliance with these procedures. Seller or its Authorized Agent may make reasonable charges for parts and labor for repairs not covered by this Limited Warranty.



Limited One-year Warranty

Superwinch, Inc., warrants to the original retail buyer only that mechanical and electrical components of the genuine SUPERWINCH® Winch Model shall be free from defects in materials and workmanship for one year from the provable date of purchase. Any Product that Superwinch determines to be defective will be repaired or replaced at Superwinch's sole discretion without charge to Buyer upon Buyer's compliance with these procedures. Seller or its Authorized Agent may make reasonable charges for parts and labor for repairs not covered by this Limited Warranty.



Limited One-year Motor ~ Three-year Gear Box Warranty

Superwinch, Inc. Power Drive products, except where noted, will carry a 3 year warranty on the Gear Box and 1 year warranty on the motor against manufacturing defects only. This will be effective from date of sale to the end user. This warranty does not allow for abuse or overloading of the product. Superwinch will not repair or replace any part(s) under warranty that have become inoperative because of improper maintenance, eccentric loading, overloading, chemical or abrasive action, excessive heat or other abuse. Superwinch retains the right to replace or repair the units at its discretion. Superwinch will repair any parts proven to have been defective in material or workmanship under the warranty period and returned to Superwinch. Units or parts that have been altered or modified in any way without the written authorization of Superwinch will not be warranted. Superwinch shall not be responsible for incidental or consequential damages to property, loss of profits, loss of use or costs associated with the installation or removal of the product.

Inquiries

Any inquiries regarding compliance with warranties may be addressed in writing to Superwinch, Inc. or to Superwinch, Ltd. at the addresses noted below.

Superwinch, Inc.

45 Danco Road
Putnam, CT 06260 USA
Tel. (860) 928-7787
Fax (860) 963-0811
info@superwinch.com

Superwinch, Ltd.

Unit D, Union Mine Road, Pitts Cleave
Tavistock, Devon PL 19 0PW England
Tel.+44 (0) 1822 614101
Fax+44 (0) 1822 615204
sales@superwinch.net

The warranties set forth herein are exclusive and in lieu of all other warranties, whether oral or written, express or implied.

3 Ways to Get the Most from Your Winch

1. Physics of the Pulling Power Zone™


How the Laws of Physics govern winch performance. We know that using a long-handled wrench makes a job easier. You pull further away from the bolt – a longer turning radius.

WHAT IF THE BOLT WAS DOING THE PULLING?

Then the opposite is true. It's easier for the bolt to turn the same weight when it is closer to the bolt – a shorter turning radius.

Just like the drum on a winch.

As layers of rope build up, pulling the same weight requires greater force, robbing you winch of power. The first 2 layers of rope on the drum we call the Pulling Power Zone. Beyond 2 layers, pulling capacity can be reduced as much as 42%.

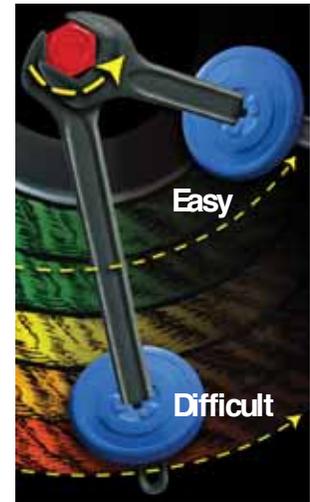


Get the most from your winch. Extra layers cut pulling power. Stay in the Pulling Power Zone.

Start each pull with a minimum of **5 wraps*** around the drum.

From the minimum 5 wraps of rope, to the maximum of **2 layers**** on the drum, you are working in the **Pulling Power Zone**.

* The industry safety standard. The rope fastener alone cannot support a heavy load.

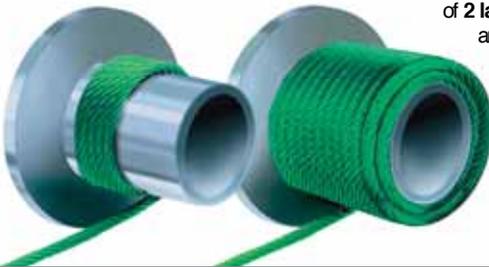

** Pulling capacity is determined by the load a winch can pull with only the bottom layer of rope on the drum. For practical purposes, full capacity is retained with up to 2 layers.



2. Use pulley block and double the capacity of your winch.

Another Law of Physics: double the line with a pulley block and you double the pulling capacity of your winch. Removing extra rope from the drum also allows you to work in the Pulling Power Zone.



Some typical pulls: a single line straight pull.





A typical double-line winch and pulley arrangement doubles winch capacity.



A redirected pull. If there's no straight, clear line to the anchor point, use a pulley block.

3. Keep the rope feeding through the fairlead as straight as possible.

This will help keep the rope wrapping smoothly across the drum. Rope feeding through the fairlead at a sharp angle will bunch up.



CHOOSING THE RIGHT WINCH FOR THE JOB

The Right Winch

Select a winch with a capacity of 1½ times the Gross Vehicle Weight.

Approximate Vehicle Weights* and Suggested Winches**		
2007 Models	Gross Vehicle Weight (lbs)	Suggested Winch (lbs)
Jeep Wrangler	4900	8500/9000
Jeep Grand Cherokee 3.7L V6	5700	8500/9000
Dodge Ram Reg Cab LB	6600	9000/10,000/12500
Land Rover HSE	6834	9000/10,000/12,500
Toyota Tundra Reg Cab	7000	10,000/12,500
Chevrolet Tahoe LS 4dr	7200	10,000/12,500
Hummer H2	8600	12,500/16,500
Ford F-250 Superduty	9000	12,500/16,500
GMC 2500HD Ext Cab LB Diesel	9200	12,500/16,500

Please consider your particular applications and choose accordingly.


* Figures for reference only. Check owner's manual for your vehicle.

** These recommendations are based on recovery of a fully loaded vehicle up a steep grade, an extreme application.

The Right Winch

Pulling anything with wheels up a slope involves some Laws of Physics, but calculating the Rolling Weight to determine the winch you need, is simple.

1. Determine Gross Vehicle Weight (GVW). This is the weight of the vehicle alone (curb weight), plus the weight of any items in and on the vehicle. (See examples in "The Right 4x4 Winch.")
2. How steep is the slope or ramp? Divide the height of the ramp by the length to determine the Grade.

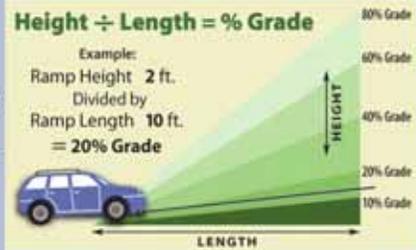

It's a common mistake to confuse the degree of the angle of a slope with the grade percent. Angle (degree) is a geometric measure. You must know the grade % to find the Rated Line Pull you need.

With the GVW and the Grade % known, find the approximate size of the winch you need:

Approximate Gross Vehicle Weights	Choosing a Winch for Rolling Weight					Rated Line Pull (Suggested Winch*)
	Grade:	10%	20%	40%	60%	
5,025		3,401	2,155	1,664	1,422	1,000
10,050		6,803	4,308	3,331	2,845	2,000
15,075		10,251	6,428	4,991	4,268	3,000
20,100		13,597	8,643	6,655	5,690	4,000
25,126		17,009	10,776	8,320	7,112	5,000
30,151		20,408	12,931	9,983	8,535	6,000
45,226		30,612	19,397	14,975	12,802	9,000

* Winch size is approximate

Consider all factors. Some situations may require a larger or different type of pulling device.

The Right Winch

Suggested Superwinch Models for Your ATV		
Vehicle	Weight Range (lbs)	Suggested Winch (lbs)
Less than 350cc	400 – 500	2000
350cc – 500cc	500 – 700	2500
Greater than 500cc	700 – 900	3000
UTV / Side-by-Side	700 – 1000	4000

Mounting an ATV winch:

There are many variations in ATV frames that require specific mounting kits for make, model and year. Superwinch has mounting kits for all popular models.

The Right Winch

Most winches can be used to pull different types of loads in a variety of situations. To help ensure your safety and get the most from your purchase, follow these guidelines for choosing the proper winch:

1. If you are moving dead weight – a load without wheels or operable wheels (a vehicle stuck in the mud, for example) – refer to the information in the "The Right 4x4 Winch."
2. If you are moving Rolling Weight – a wheeled load that will not move by its own power – refer to instructions in the "The Right Trailer Winch" for choosing a winch based on weight AND the grade of a slope, such as a ramp.



online

Superwinch.com



Superwinch, Inc.

Winch Drive
Putnam, Connecticut 06260, USA
Customer Service: 1.800.323.2031
FAX: 1.860.963.0811
info@superwinch.com
Superwinch.com

Superwinch, Ltd.

Unit D, Union Mine Road
Pitts Cleave Ind Est
Tavistock, Devon
PL 19 CPW England
Tel: 44 (0)1822 614101
sales@superwinch.net
Superwinch.com