


Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- Two-function sprayhead with touch control, Sweep™ spray, and aerated stream settings
- DockNetik™ ensures a secure sprayhead fit
- Promotion technology with nylon hose and ball joint for easy operation
- Left or right handle installation and 360° spout rotation
- Single-hole, two-hole, three-hole, or four-hole
- Includes 10-1/2" (267 mm) escutcheon plate and soap dispenser
- 1.8 gal/min (6.8 l/min) maximum flow rate at 60 psi (413.7 kPa)
- Masterclean sprayface allows for easy cleaning

**PULL-DOWN KITCHEN SINK FAUCET
K-R776-SD**

ADA **CSA B651**

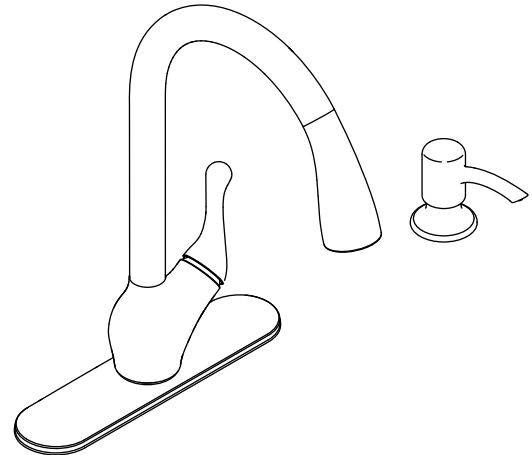

Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- ASME A112.18.1/CSA B125.1
- CSA B651
- Energy Policy Act of 1992
- NSF 61
- All applicable US Federal and State material regulations

Colors/Finishes

- VS: Stainless Steel

Specified Model

Model	Description	Colors/Finishes
K-R776-SD	Pull-down kitchen sink faucet	<input type="checkbox"/> VS

Product Specification

Kitchen sink faucet shall be of metal construction. Faucet shall feature a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Faucet shall have two-function sprayhead with touch control, Sweep spray, and aerated stream settings. Faucet shall feature DockNetik to ensure a secure sprayhead fit. Faucet shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Faucet shall feature Promotion technology with nylon hose and ball joint for easy operation. Faucet shall feature left or right handle installation and 360° spout rotation. Faucet shall have 1.8 gal/min (6.8 l/min) maximum flow rate at 60 psi (413.7 kPa). Faucet shall be for single-hole, two-hole, three-hole, or four-hole installation. Faucet includes 10-1/2" (267 mm) escutcheon plate and soap dispenser. Faucet shall feature Masterclean sprayface for easy cleaning. Kitchen sink faucet shall be Kohler Model K-R776-SD-_____.

BAROSSA™


Installation Notes

Install this product according to the installation guide.

Product includes flexible connections for easy installation.

Refillable soap dispenser allows up to 16 fluid ounce (473 ml) capacity.

ADA compliant when installed to the specific requirements of the 2010 ADA Standards for Accessible Design.

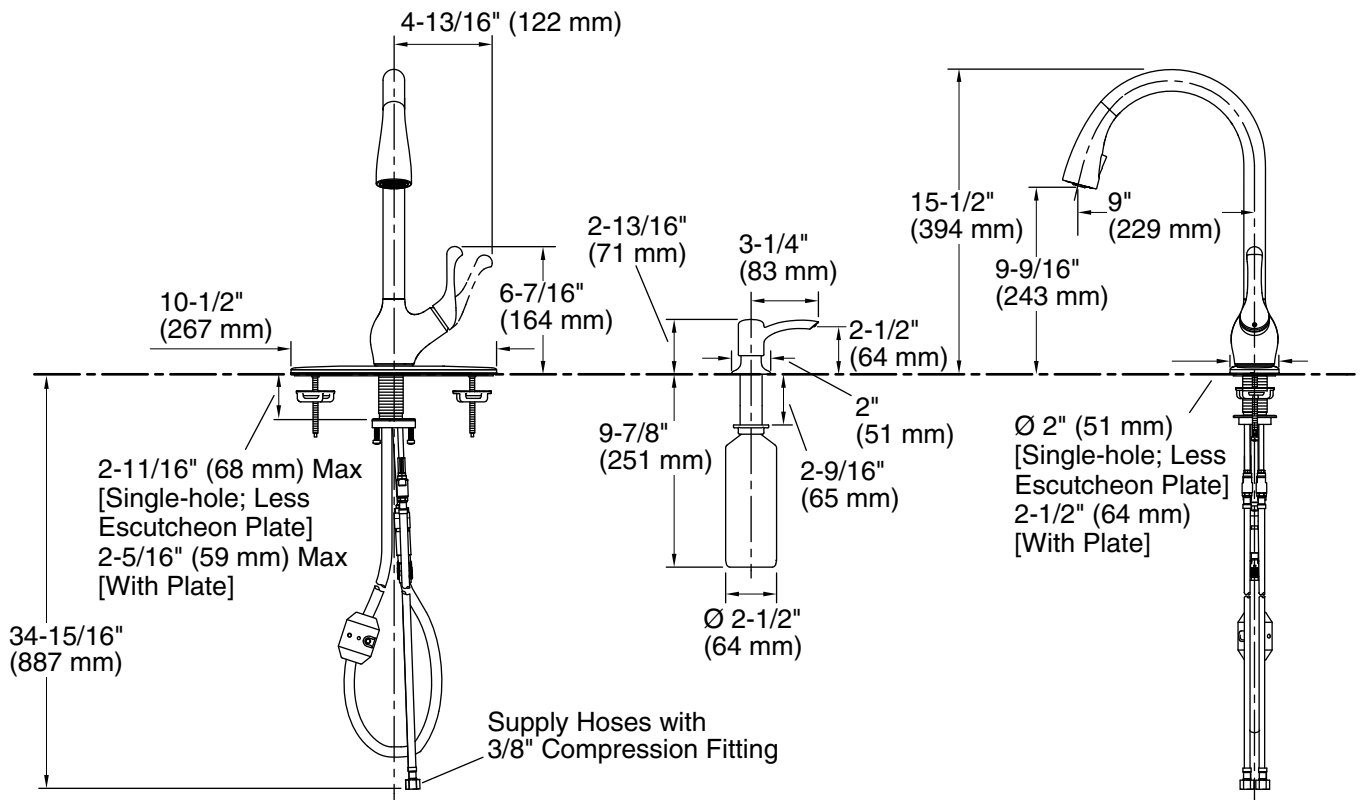

Product Diagram