

## Katun® Bath / Shower Set K-R78040-4E

#### **Features**

- Advanced spray engine provides three spray options: powerful massage, intense drenching, or wide coverage.
- Wide coverage spray produces an encompassing spray for everyday use.
- Intense drenching spray delivers a forceful spray ideal for rinsing soap from hair.
- Powerful massage is a focused stream for massaging sore muscles or for use as a utility spray.
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup.
- Single-lever handle allows for simultaneous on/off activation and temperature control.
- Premium KOHLER finishes with ScratchShield® technology withstands even the toughest daily use.
- Rite-Temp® pressure-balancing technology maintains water temperature within +/- 3 degrees Fahrenheit for anti-scalding protection and precise temperature control.
- Package includes: showerhead, showerarm and flange, valve trim plate, diverter spout with 1/2" NPT or slip-fit connection and Rite-Temp® valve with 1/2" connections.

#### Material

Constructed with premium materials for durability and reliability.

## Adapters, Rough-in and Extension Kits K-10350-NA









#### Codes/Standards

ASME A112.18.1/CSA B125.1 ASSE 1016/ASME A112.1016/CSA B125.16 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

# **KOHLER® Faucet Lifetime Limited Warranty**

See website for detailed warranty information.

#### **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	СР	Polished Chrome
	BN	Vibrant® Brushed Nickel
	RI	Matte Black





## Katun® Bath / Shower Set K-R78040-4E

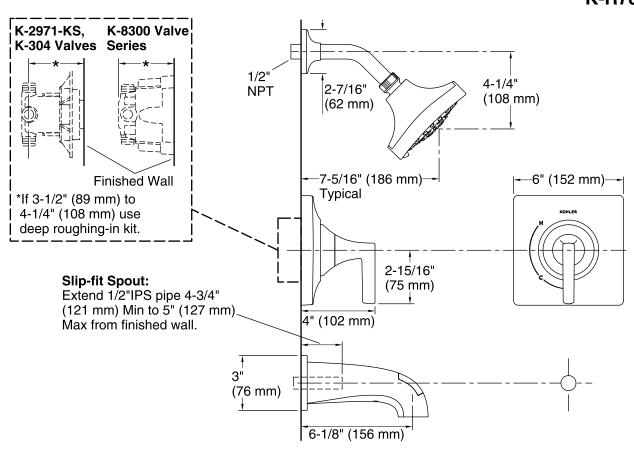

#### **Technical Information**

All product dimensions are nominal.

#### **Shower Valve:**

Flow rate - Max: 5 gal/min (18.9 l/min)
Pressure - Max: 45 psi (3.1 bar)
Min. pressure IN: 20 psi (1.4 bar)

#### Showerhead/Body Spray:

Rated maximum flow: 1.8 gal/min (6.8 l/min)
Pressure: 80 psi (5.5 bar)

#### **Notes**

For use with automatic compensating valves rated at 1.08 gal/min (4.1 l/min) or less.

Install this product according to the installation instructions.

