



• TRUSTED QUALITY SINCE 1921 •



RUST-OLEUM®


GARAGE & INTERIOR

FLOOR PRIMER

APPLY OVER ANY

SEALED CONCRETE

PREVIOUSLY COATED CONCRETE

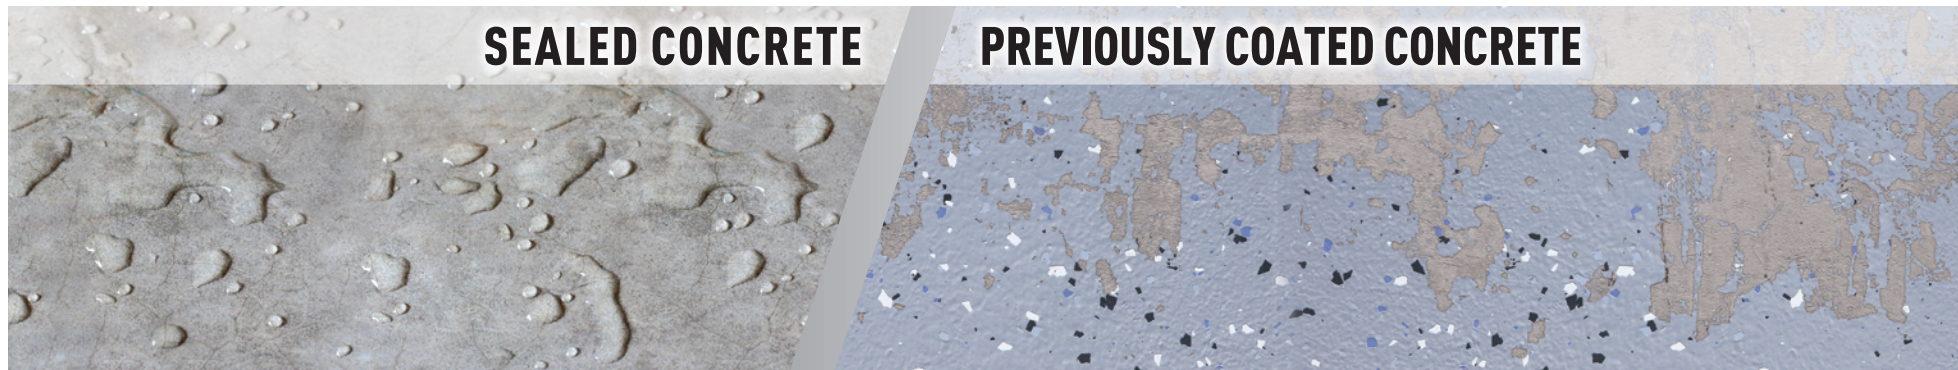

NO SANDING NO GRINDING

TOPCOAT WITH ANY FLOOR COATING



COVERS UP TO 400 SQ. FT.

1 GAL (128 FL OZ) | GRAY

WARNING! COMBUSTIBLE LIQUID AND VAPOR. EYE AND SKIN IRRITANT. READ OTHER CAUTIONS ON BACK PANEL.

ADVERTENCIA! LIQUIDO Y VAPOR COMBUSTIBLES. IRRITANTE DE LOS OJOS Y DE LA PIEL.

RUST-OLEUM® Garage & Interior Floor Primer is easy to use, revolutionary technology which allows you to coat over a previously coated or sealed concrete floor without having to scuff, sand, or grind the surface. Transform your worn garage or basement floor with any Rust-Oleum floor coating (including water and solvent base). Simply Clean, Prime, & Coat!

READ ALL INSTRUCTIONS CAREFULLY BEFORE STARTING PROJECT

WHERE TO USE: For use on previously coated or sealed concrete floors in garages, carports, basements, laundry rooms, and other interior surfaces. May be applied to bare, etched concrete. Note: This Garage & Interior Floor Primer is not a suitable replacement for etching a concrete surface. Proper surface prep is critical for product performance.

LIMITATIONS: Do not use over superhydrophobic sealers or floors contaminated with tire seal and protectant products. Not recommended for asphalt. Note: Garage & Interior Floor Primer is a gray color. Clear topcoats are not recommended for use over Rust-Oleum® Garage & Interior Floor Primer.

SURFACE PREPARATION: For a previously painted, coated, stained, or sealed concrete surface, use a wire brush to remove any loose or peeling paint. Rinse or sweep away dust and other particles. Clean the entire floor with Rust-Oleum Cleaner & Degreaser. Sand (60 - 80 grit) or spot etch all exposed concrete surfaces using Rust-Oleum Clean & Etch. Rinse thoroughly and allow to dry completely.

WARNING! If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN YOUNG CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

APPLICATION: Garage & Interior Floor Primer is ready to use. Do not dilute. Stir thoroughly prior to use. Apply when air (ambient) temperature is 50-90 F (10-32 C) and relative humidity is below 85%. Do not apply if rain is expected within 24 hours.

Use a brush or edger to trim the perimeter and hard-to-reach areas. Use a long handled roller and a high-quality, 3/8" nap roller cover to apply an even coat onto the surface. Apply in 4'x4' sections, and maintain a wet edge while rolling. Do not let product puddle. Only one coat is recommended.

DRY TIME: Garage & Interior Floor Primer must be allowed to dry a minimum of 6 hours, but no more than 48 hours, to ensure proper adhesion of topcoat.

CLEAN UP & STORAGE: Wash tools and equipment with warm water and a mild detergent. Properly dispose of all soiled rags. Store in a cool, dry area and do not let product freeze.

COVERAGE: Covers up to 400 sq. ft. per gallon on previously sealed, painted, coated, or smooth concrete floors. Rough or porous surfaces will require more material.

PRECAUTIONS. May cause eye, nose, throat and skin irritation. Use only with adequate ventilation. Close container after each use.

CAUTION: KEEP OUT OF REACH OF CHILDREN - DO NOT TAKE INTERNALLY.

⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov VOC < 100 g/L

SATISFACTION GUARANTEED: If you are dissatisfied with this product, contact Rust-Oleum Product Support at 888-855-1774 for a product replacement or refund of the purchase price.

RUST-OLEUM® Garage & Interior Floor Primer is easy to use, revolutionary technology which allows you to coat over a previously coated or sealed concrete floor without having to scuff, sand, or grind the surface. Transform your worn garage or basement floor with any Rust-Oleum floor coating (including water and solvent base). Simply Clean, Prime, & Coat!

READ ALL INSTRUCTIONS CAREFULLY BEFORE STARTING PROJECT

WHERE TO USE: For use on previously coated or sealed concrete floors in garages, carports, basements, laundry rooms, and other interior surfaces. May be applied to bare, etched concrete. Note: This Garage & Interior Floor Primer is not a suitable replacement for etching a concrete surface. Proper surface prep is critical for product performance.

LIMITATIONS: Do not use over superhydrophobic sealers or floors contaminated with tire seal and protectant products. Not recommended for asphalt. Note: Garage & Interior Floor Primer is a gray color. Clear topcoats are not recommended for use over Rust-Oleum® Garage & Interior Floor Primer.

SURFACE PREPARATION: For a previously painted, coated, stained, or sealed concrete surface, use a wire brush to remove any loose or peeling paint. Rinse or sweep away dust and other particles. Clean the entire floor with Rust-Oleum Cleaner & Degreaser. Sand (60 - 80 grit) or spot etch all exposed concrete surfaces using Rust-Oleum Clean & Etch. Rinse thoroughly and allow to dry completely.

WARNING! If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN YOUNG CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

APPLICATION: Garage & Interior Floor Primer is ready to use. Do not dilute. Stir thoroughly prior to use. Apply when air (ambient) temperature is 50-90 F (10-32 C) and relative humidity is below 85%. Do not apply if rain is expected within 24 hours.

Use a brush or edger to trim the perimeter and hard-to-reach areas. Use a long handled roller and a high-quality, 3/8" nap roller cover to apply an even coat onto the surface. Apply in 4'x4' sections, and maintain a wet edge while rolling. Do not let product puddle. Only one coat is recommended.

DRY TIME: Garage & Interior Floor Primer must be allowed to dry a minimum of 6 hours, but no more than 48 hours, to ensure proper adhesion of topcoat.

CLEAN UP & STORAGE: Wash tools and equipment with warm water and a mild detergent. Properly dispose of all soiled rags. Store in a cool, dry area and do not let product freeze.

COVERAGE: Covers up to 400 sq. ft. per gallon on previously sealed, painted, coated, or smooth concrete floors. Rough or porous surfaces will require more material.

PRECAUTIONS. May cause eye, nose, throat and skin irritation. Use only with adequate ventilation. Close container after each use.

CAUTION: KEEP OUT OF REACH OF CHILDREN - DO NOT TAKE INTERNALLY.

⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov VOC < 100 g/L

SATISFACTION GUARANTEED: If you are dissatisfied with this product, contact Rust-Oleum Technical Support at 1-888-NUFLOOR (1-888-683-5667) for a product replacement or refund of the purchase price.



11 Hawthorn Pkwy., Vernon Hills, IL 60061
800-373-6333 rustoleum.com

Made in USA | Hecho en E.U.A.
©2018 Rust-Oleum Corporation 349953 1218

