


ASSEMBLY INSTRUCTIONS

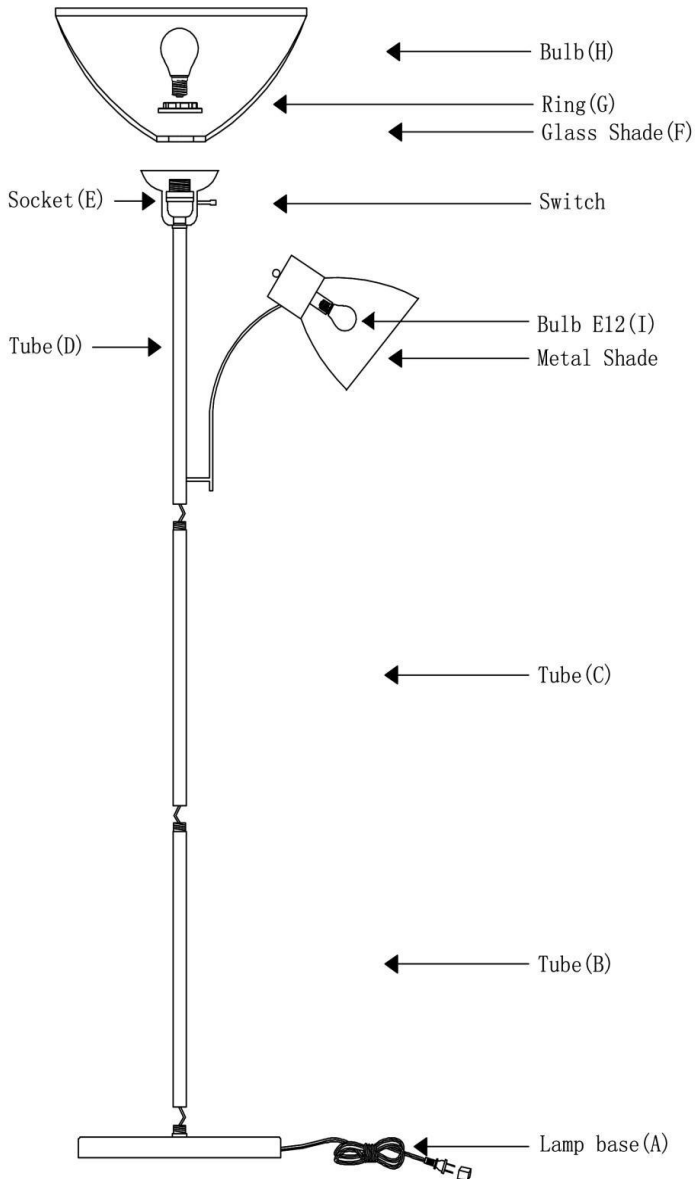

1. PLACE LAMP BASE(A) ON A FLAT SURFACE.
2. THREAD TUBE(B) ONTO LAMP BASE(A). BE CAREFUL NOT TO TWIST THE POWER CORD. TURN CLOCKWISE TO TIGHTEN SECURELY.
3. THREAD TUBE(C) ONTO TUBE(B) AND TURN CLOCKWISE TO TIGHTEN SECURELY.
4. THREAD TUBE(D) ONTO TUBE(C) AND TURN CLOCKWISE TO TIGHTEN SECURELY.
5. INSERT GLASS SHADE(F) ONTO METAL CUP WHERE TOP SOCKET(E) IS LOCATED.
6. THREAD THE RING(G) ONTO SOCKET.
7. INSTALL LED LIGHT BULBS(H) ON THE TOP AND LAMP ARM SOCKET LOCATIONS. TWO(2) LED LIGHT BULBS INCLUDED.
8. PLUG THE LAMP. THIS LAMP HAS A 95 INCH LONG CORD.

ON/OFF LIGHT FUNCTION

1. WHEN YOU TURN THE SWITCH ONCE, ONLY THE READING LAMP TURNS ON.
2. WHEN YOU TURN THE SWITCH THE SECOND TIME, THE READING LAMP LIGHT TURNS OFF AND THE FLOOR LAMP TURNS ON.
3. WHEN YOU TURN THE SWITCH THE THIRD TIME, BOTH READING LAMP AND FLOOR LAMP LIGHTS TURN ON AT SAME TIME.
4. WHEN YOU TURN THE SWITCH THE FOURTH TIME, BOTH READING LAMP AND FLOOR LIGHTS TURN OFF AT SAME TIME.

WARNING

DO NOT USE POLISHER OR CLEANER ON YOUR LAMP. JUST WIPE CLEAN WITH SOFT CLOTH.

IMPORTANT SAFETY INSTRUCTIONS

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS THE PLUG CAN BE FULLY INSERTED.