
GL BALFLEX

FAST · SAFE · EASY

4in x 6ft Semi-Rigid Duct with Collars

Instructions:

- 1. Slide the end of the duct with the smooth connector over the dryer exhaust (a) and secure with a clamp.
- 2. Form the duct to connect to the outside vent.
- 3. Insert the serrated edge of the connector into the outside vent (b) and secure with a clamp.

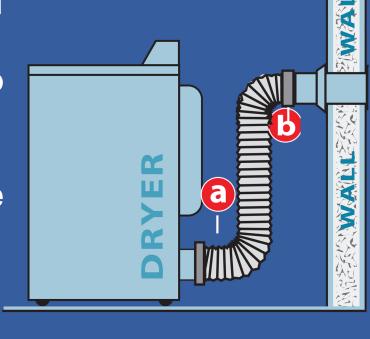

Model Number: GLOBAL002