


PRODUCT SPECIFICATIONS

4ft Wrap Light With Motion Sensor



54676141
SKU# 1001820743

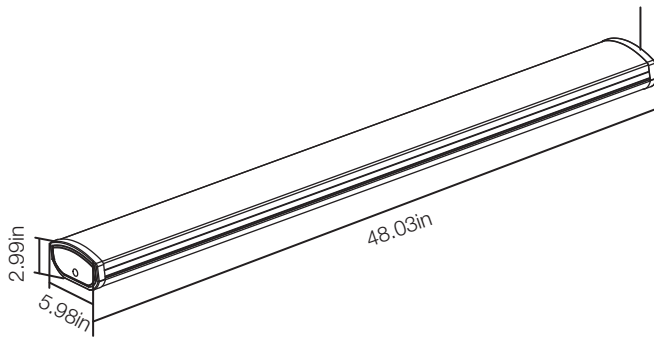

SPECIFICATIONS

Model Number	54676141
SKU	1001820743
OSMID	207018074
Power	39.5 W
AC Voltage, Frequency	120V, 60 Hz
Color Temp (nom.)	4000K
Operation Temp	-4°F ~ 113°F
CRI	90
Lumen Output (min.)	3600 lm
Dimming	NO
Lifetime Rating	L70/50000Hrs
Efficacy	91.1 lm/watt

INCLUDED IN BOX

- Mounting Bracket (1)
- Gasket (1)
- Electrical Box Screw (2)
- Drywall Anchor/Screws (2EA)
- Double Wire Connector (1)
- Single Wire Connector (1)

PACKAGING

Weight (±0.5 lb)	4.11 lbs
Size (L x W x H) (±0.1 in)	48.03in x 5.98in x 2.99in
Box Dimensions	51.61in x 6.89in x 3.78in
Gross Weight	5.47 lbs
UPC	849489001708

APPLICATIONS

Suitable for damp locations

SURFACE MOUNT



4ft Wrap Light With Motion Sensor




54676141
SKU# 1001820743

ADVANTAGES

- Knockouts 7/8" (3)
- 50,000 Hours of Continuous Use
- 5 Year Warranty

DIRECT WIRE INSTALL

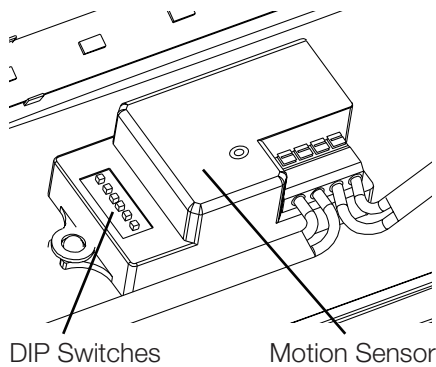

MOTION SENSOR SPECS

	Detection Area			Coverage By Install Height		
	DIP 1	DIP 2		10 ft. Ceiling	9 ft. Ceiling	8 ft. Ceiling
I	●	●	100%	40 ft. x 10 ft.	40 ft. x 9 ft.	39 ft. x 8 ft.
II	●	○	75%	36 ft. x 10 ft.	34 ft. x 9 ft.	33 ft. x 8 ft.
III	○	●	50%	26 ft. x 10 ft.	23 ft. x 9 ft.	23 ft. x 8 ft.
IV	○	○	10%	7 ft. x 10 ft.	7 ft. x 9 ft.	7 ft. x 8 ft.

	Hold Time			Photocell		
	DIP 3	DIP 4		DIP 5	DIP 6	
I	●	●	5 sec.	I	●	Disable
II	●	○	90 sec.	II	●	50 lux.
III	○	●	5 min.	III	○	10 lux.
IV	○	○	15 min.	IV	○	2 lux.

Denotes Factory Setting