





ALL PRODUCTS	SUPPORT	CATALOG & BROCHURES	INNOVATIONS	DIVISIONS	CONTACT	Français
--------------	---------	---------------------	-------------	-----------	---------	----------

METALTECH > STANDARD FRAMES > 60" X 60" STANDARD FRAME

## 60" X 60" STANDARD FRAME

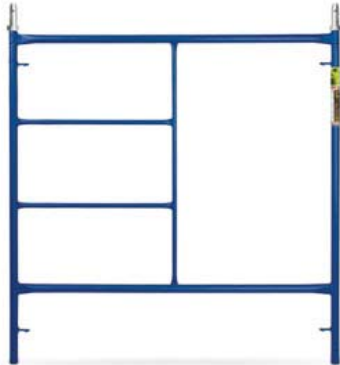


DIMENSIONS	60" X 60"
LOCK SPACING	48 IN.
WEIGHT	38 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.625 IN. - 13 GAUGE
FINISH	POWDER COATED - AVAILABLE IN GALVANIZED
INCLUDES	COUPLING PINS AND SPRING-LOCKS
FRAME LOCK CHOICE	GRAVITY LOCK, C-LOCK, T-LOCK, U-LOCK, F-LOCK, V-LOCK AND K-LOCK
STANDARDS	ANSI AND OSHA
MODEL	M-MF6060PS-A
UPC	778300800575

Available in galvanized



### FRAME LOCKS CHOICE

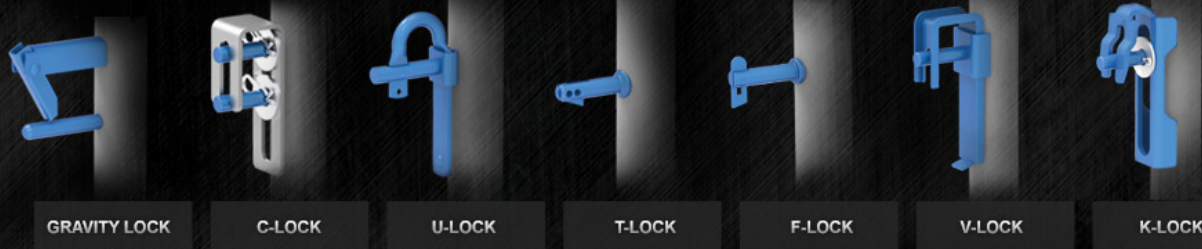

#### ALL PRODUCTS

- ▶ Exterior Scaffolding components
- ▶ Jobsite Series™
- ▶ Alu Series™
- ▶ BuildMan™ Grade
- ▶ Fiberglass Series™
- ▶ Temporary fences
- ▶ Telescopic Ladder and stepladder
- ▶ Brackets, beam and shoring post

#### LOOKING FOR A PRODUCT?

OR

Download our **CATALOG**

#### COMPANY

- About us
- Contact us

#### INNOVATIONS

- Saferstack® Frame
- Saferstack® Fences

#### SERVICE & SUPPORT

- Exterior scaffolding setup instructions
- Exterior Scaffolding Safety Guidelines
- Owner's manual
- Replacement parts
- Videos

#### FOLLOW US ON

