

Features

- Featuring ComforTrack™ Technology – a cushioned bottom track – allows for easier access to the bathing/showering space
- ComforTrack™ enables you to sit, lean or kneel on the bottom track of the door to easily bathe children or clean the showering/bathing space
- 3/16" thick glass available in Clear, Pebbled, Frosted, and Templar

Installation


- Out-of-plumb adjustability allows for easy installation

Material

- Anodized aluminum hardware prevents rusting or Corrosion
- Tempered glass ensures maximum safety and durability

Components

Additional included component/s: Hardware Kit

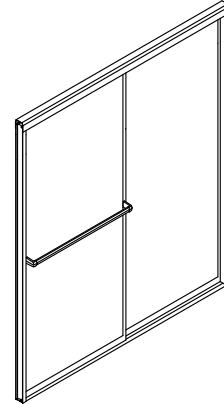

For complete listing of available colors, go to sterlingplumbing.com.


Codes/Standards

ANSI Z97.1 (Tempered Glass)
CPSC 16CFR 1201 Cat II

See website for detailed warranty information.


Product Specification

Shower door shall be 59-3/8" (1508 mm) in width and 70-1/8" (1781 mm) in height. Shower door shall be made of anodized aluminum. Shower door shall feature tempered glass. Shower door shall feature ComforTrack™ Technology - a cushioned bottom track. Shower door shall be shower installation. Shower door shall be STERLING Model 572075-59.

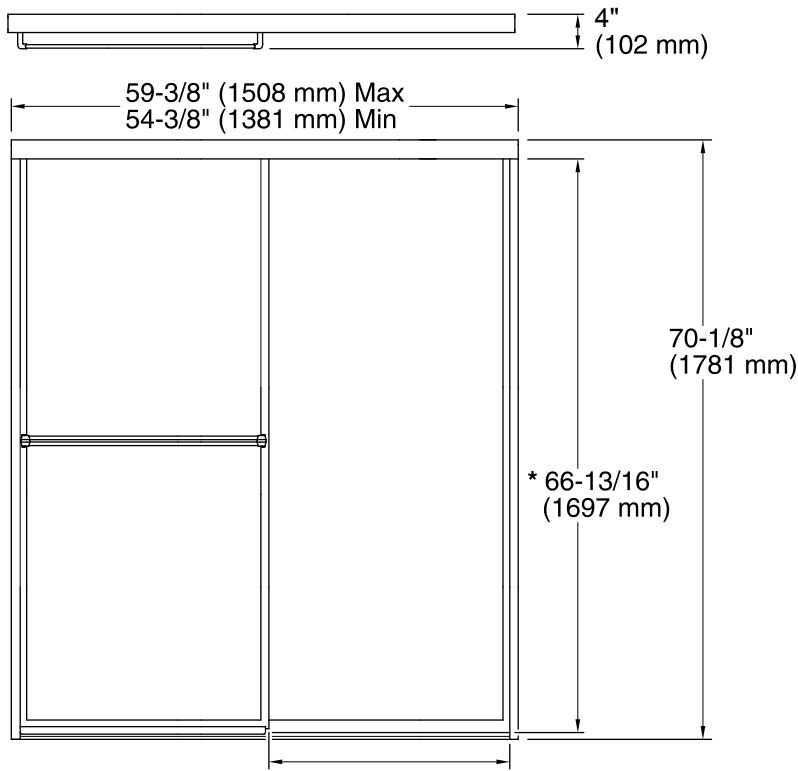

* 28-3/16" (716 mm) Max
* 25-11/16" (652 mm) Min

*** Walk-Through**

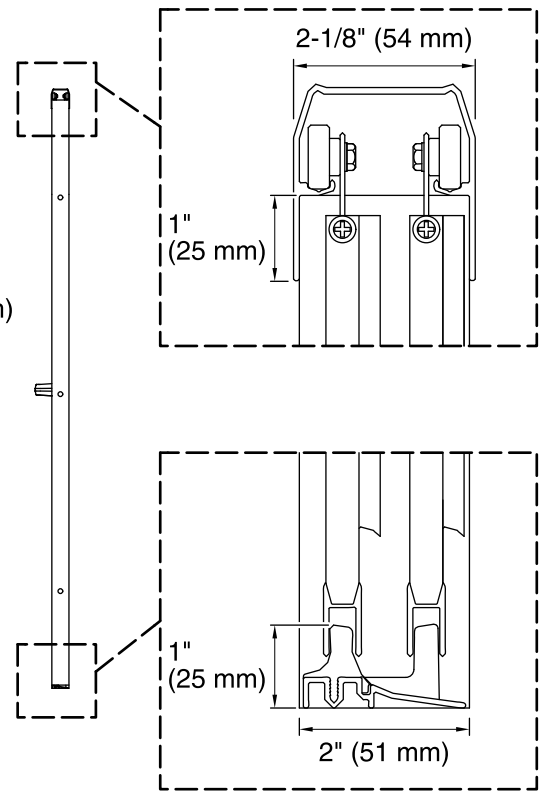

Technical Information

All measurements are nominal.
 Frame material: Aluminum,
 Opening style: Sliding/Bypass
 Walk-through - min: 25-11/16" (652 mm)
 Walk-through - max: 28-3/16" (716 mm)
 Glass thickness: 3/16" (5 mm)

Installation Notes

Install this product according to the installation guide.