

FEATURES & SPECIFICATIONS

INTENDED USE — The OVWP provides years of maintenance-free general illumination for commercial or residential outdoor applications such as driveways, patios, loading areas and warehouses.

CONSTRUCTION — Rugged cast-aluminum, corrosion-resistant rear mounting plate.

Impact resistant polycarbonate front cover/diffuser resists fading and cracking.

Driver operates at 120V.

Operating temperature -40°C to 40°C.

OPTICS — High-performance LEDs maintain 70% of light output at 35,000 hours of service. (LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.)

Lenses are engineered for superior lighting distribution, uniformity and fixture spacing.

See Lighting Facts Labels for specific fixture performance.

INSTALLATION — Designed for wall mounting more than 4' above the ground. Mounts to a recessed junction box (by others).

LISTINGS — ETL Listed to US and Canadian safety standards for wet locations.

WARRANTY — 1-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.


Catalog Number
Notes
Type



Outdoor General Purpose

OVWP

LED WALL PACK

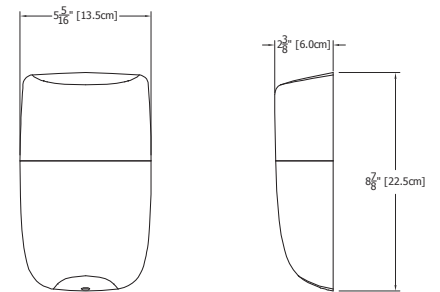

All dimensions are inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION

All configurations of this product are considered "standard" and have short lead times.

Example: OVWP LED 40K 120 PE BZ

Series	Lumens / Color temperature (CCT) ¹	Voltage	Control	Finish
OVWP LED	40K 4000K	120 120V	PE Button photocell	BZ Bronze

Notes


1 Nominal Correlated Color Temperature (CCT) per ANSI C78.377-2008.

OVWP LED Wall Pack

PHOTOMETRIC DIAGRAMS

To see complete photometric reports or download .ies files for this product, visit the OVWP home page on www.Lithonia.com. Tested in accordance with IESNA LM-79 and LM-80 standards.

OVWP LED 40K 120 PE BZ

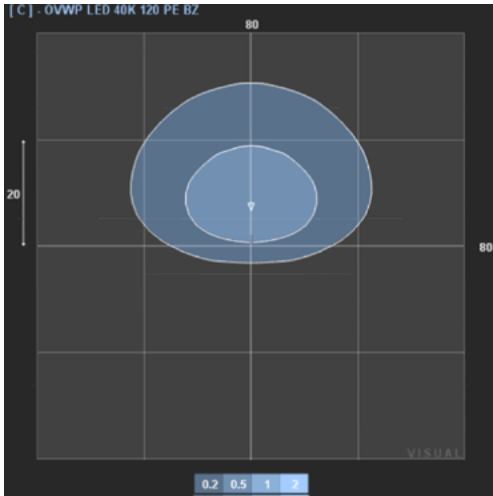

Lithonia Lighting

LED lighting facts[®]
A Program of the U.S. DOE

Light Output (Lumens)	1242
Watts	14.1
Lumens per Watt (Efficacy)	88.09

Color Accuracy
Color Rendering Index (CRI) **80**

Light Color
Correlated Color Temperature (CCT) **4000 (Bright White)**

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-ATIXBP (4/21/2016)
Model Number: OVWP LED 40K 120 PE XX
Type: Luminaire - Other