



SPACING AND FASTENING DETAIL




Eave, Ridge & Valley · -180 psf · 8 in. O.C.




Eave, Ridge & Valley · -93 psf = 12 in. O.C.



Field Fastening · -67.25 psf = 16 in. O.C.



SIDELAP DETAIL

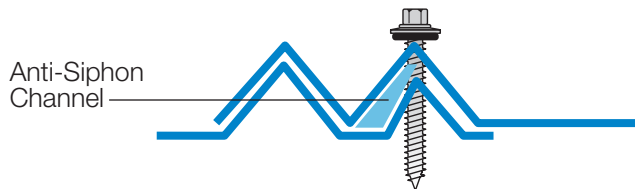

APPROVALS



26 Gauge



29 Gauge

Code Approvals¹

UL Fire Resistant Directory #R20735
 Miami Dade NOA #: **16-0510.23** (26 ga. min.)
 Florida Building #FL-11175 (29 ga. min.)

1. Code Approval numbers may have changed since publication. For the most recent code approval numbers, contact Southeastern Metals' Technical Department or refer to the appropriate code agency.

Testing Data & Specifications

Accelerated testing 2000 hours - **ASTM G23**
 Salt Spray testing 1000 hours - **ASTM B117**
 Fire Testing - **ASTM E108** or **UL 790**
 Wind Driven Rain - **TAS 100**