

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

BL3-**DW Speedi Plumb® PLUS Braided Dishwasher Connectors - Compression Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **EPDM inner hose** ensures durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- **8-sided pneumatic crimp** provides greater dependability for realible nut-to-hose connections
- **No Lead**

Operating Specifications:

Temperature: 40°- 140° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.440" ID (0.630" OD)



MATERIAL SPECIFICATIONS	
Inner Hose	EPDM
Braiding	PVC coated polyester yarn
Barb	Brass
Ferrule	Zinc-plated steel
Washer	Rubber
Compression Nut	Brass, chrome plated


Part Listing:

- | | | |
|--------------------------|------------|--|
| <input type="checkbox"/> | BL3-12DW | 1/2" compression x 1/2" compression x 12" length, bulk |
| <input type="checkbox"/> | BL3-15DW | 1/2" compression x 1/2" compression x 15" length, bulk |
| <input type="checkbox"/> | BL3-36DW F | 1/2" compression x 1/2" compression x 36" length, flag label |
| <input type="checkbox"/> | BL3-48DW F | 1/2" compression x 1/2" compression x 48" length, flag label |
| <input type="checkbox"/> | BL3-60DW F | 1/2" compression x 1/2" compression x 60" length, flag label |
| <input type="checkbox"/> | BL3-72DW F | 1/2" compression x 1/2" compression x 72" length, flag label |

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.



BL3-**DW Speedi Plumb® PLUS Braided Dishwasher Connectors - Compression Inlet

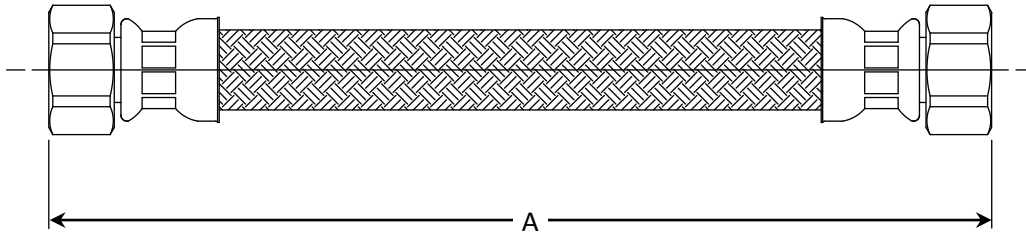

PART DIMENSIONS (Inches)	
Model	DIM. A
BL3-12DW	12.0 / 13.0
BL3-15DW	15.0 / 16.0
BL3-36DW	36.0 / 37.0

PART DIMENSIONS (Inches)	
Model	DIM. A
BL3-48DW	48.0 / 49.0
BL3-60DW	60.0 / 61.0
BL3-72DW	72.0 / 73.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

BrassCraft®