

# Bell Wire

## Twisted Bell Wire

Call Bells, Door Chimes and Furnace Controls  
30V  
60°C Insulation

### Description:

Commonly used for low-voltage battery or transformer circuits, including connecting call bells, buzzer systems, door chimes, and furnace controls.


Bell Wire conductor is rated for use up to 60°C.

### Materials:

**Insulated conductors:** Two solid copper conductors, insulated with heat and moisture-resistant PVC. Multiple conductors are twisted without fillers or a jacket. 20 AWG 2-conductor wire is cabled to 3.0" LHL (left-hand lay).

### Jacket colors:

● Red/White twisted

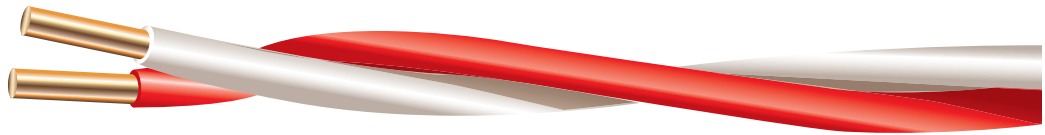

Conductor Size (AWG)	Stranding	Approx. Overall Dimensions (in)	Net Weight Lbs/MFt*
20	Solid	.100	8

### Features:



\*Actual shipping weight may vary.

Data are approximate and subject to normal manufacturing tolerances.

*It is the sole responsibility of the end user to determine suitability of this product for its intended use and application.*