

# Model# **HRG3080U**

## Thor Kitchen 30-inch Professional Gas Range



### DIMENSION & WEIGHT

#### Product Dimension

Product width	30"
Product height (from bottom to top of back splash)	38.39"-39.37"
Product height (from bottom to top of side panel)	35.57"-36.56"
Product depth (from back panel to bullnose)	27.94"
Product depth (from back panel to control board)	26.54"
Product depth (from back panel to side panel front)	24.84"
Depth of control panel (minimum)	1.7"
Depth of control panel (bullnose)	3.1"
Cast iron cooking grate (W x L)	10 3/4" * 23"
Adjustable legs	not to exceed 1"

#### Required Cutout Size (W x D x H)

	30 1/8" x 24.84" x 35.57(+1)"
Oven Cavity Dimension	24"W * 15 1/4"H * 18"D
Oven Rack Dimension	22 3/4" * 15 1/2"
Distance between Oven Rack	2 1/8"

### FEATURES

Black Porcelain Drip Pan On Cook Top  
 Heavy Duty Continuous Cast Iron Cooking Grates  
 Automatic Re-Ignition Safety Feature  
 Blue LED Illuminated Knobs  
 4.2 cu.ft. Oven Capacity  
 Stainless-Steel Professional Style  
 Blue Porcelain Oven Interior  
 2 x Halogen Lights  
 Commercial Convection Fan

<b>12K</b>	<b>12K</b>
<b>18K</b>	<b>15K</b> (650 BTU Simmer)

### BURNER PERFORMANCE



Total Number of Range Top Burners	4 Burners
Front Right (Dual Burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Front Left (Single)	18,000 BTU
Rear Right (Single)	12,000 BTU
Rear Left (Single)	12,000 BTU
Tube Broil burner	13,000 BTU
U-shape Bake burner	22,000 BTU

### TECHNICAL DETAILS

Fuel Type	Natural Gas / LP Convertible
Electrical Requirements	120V
Circuit Breaker (A)	15 or 20 A
Frequency (Hz)	60 Hz

### ACCESSORIES (NOT INCLUDED)

LPKHRG3080U	Liquid Propane Gas Conversion Kit
TR30SS	30-inch Telescopic Rack
ITHRG3080U	30-inch Island Trim
RG1022	Cast Iron Reversible Griddle
RG1032	Cast Iron Range Griddle

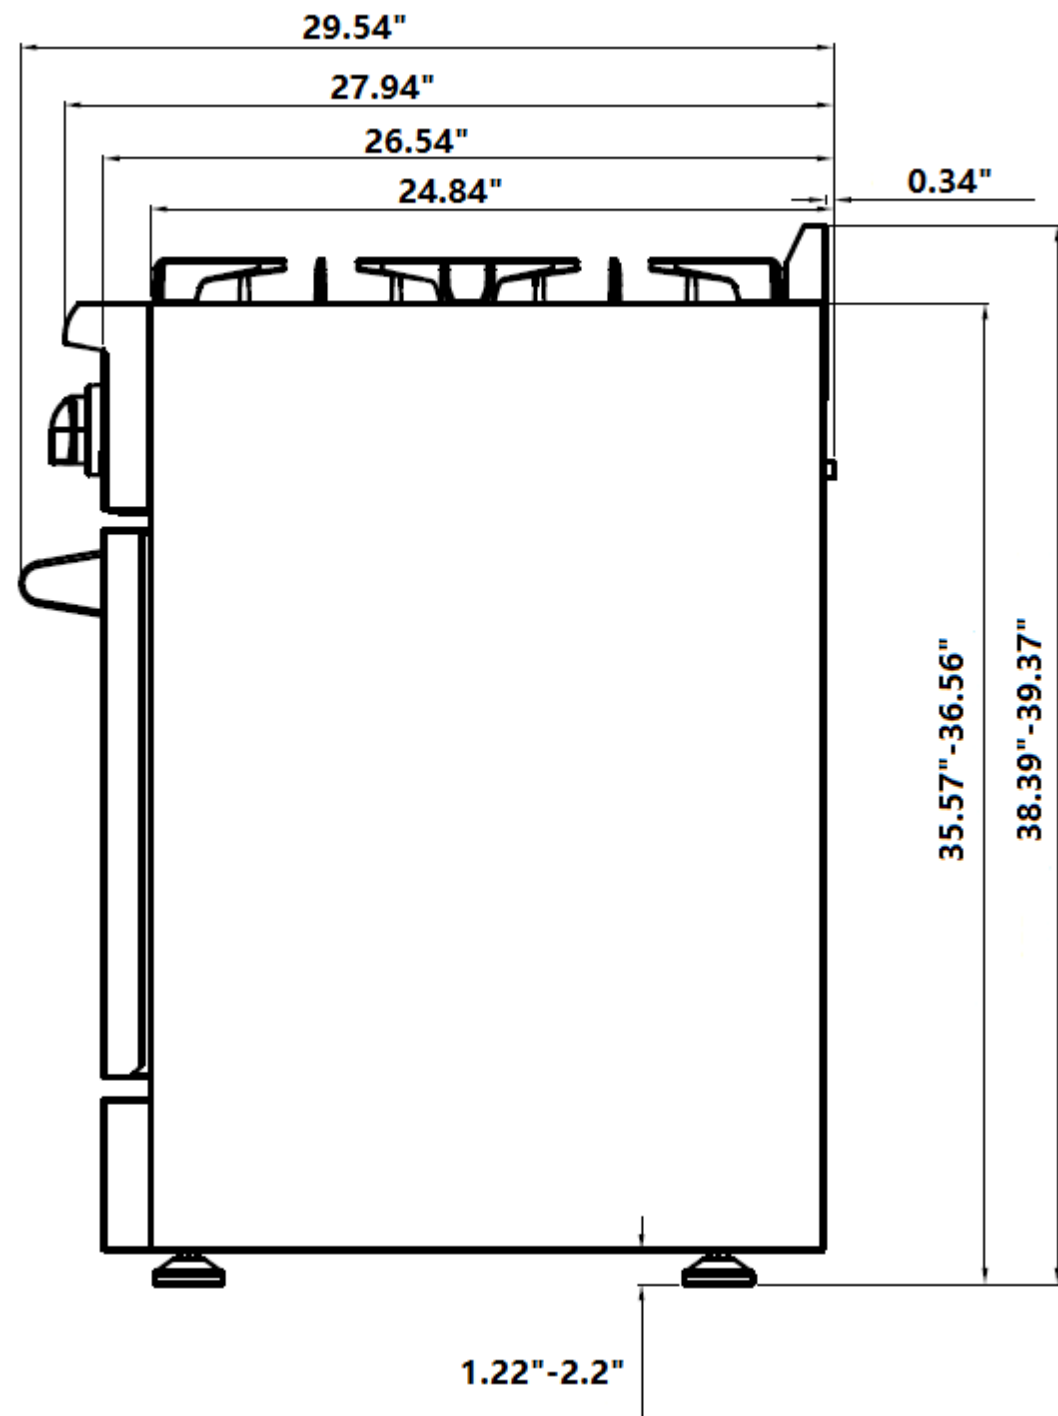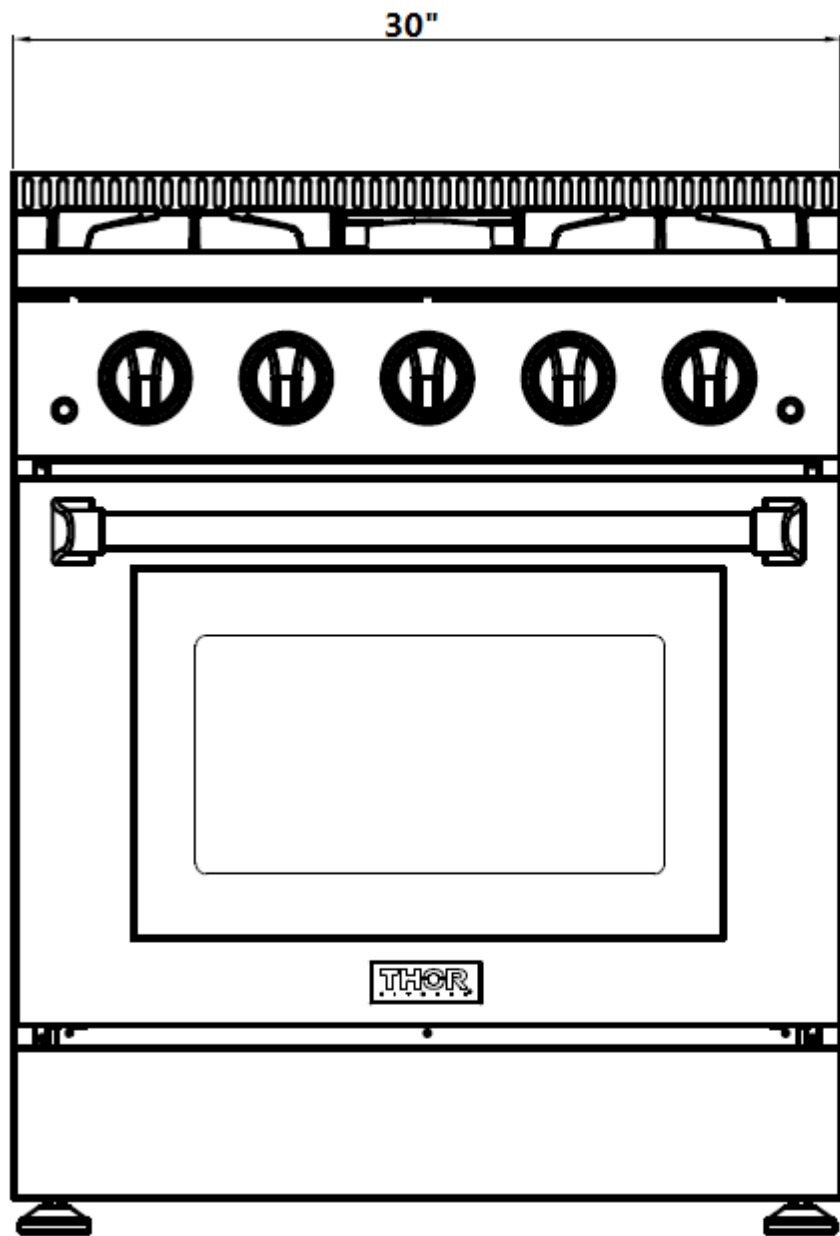

**NG: Input Pressure: 7 inches, Output Pressure: 5 inches**  
**LP: Input Pressure: 11 inches Output Pressure: 10 inches**  
**Size of Regulator: ½ inch**

