



HDS3660- 106K (O & B)  
(Cut to size specification sheet)


1. Cut 6" or desired width from left side  
Install

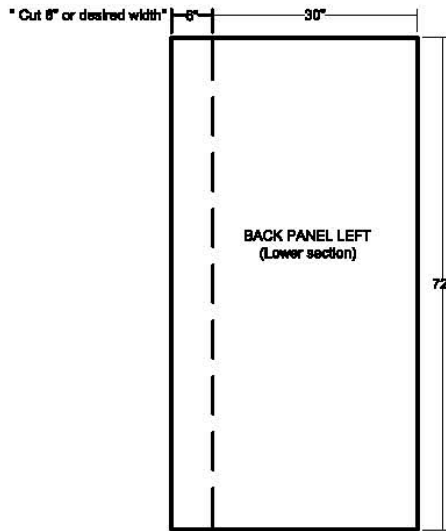

2. Cut 6" or desired width from right side  
Install

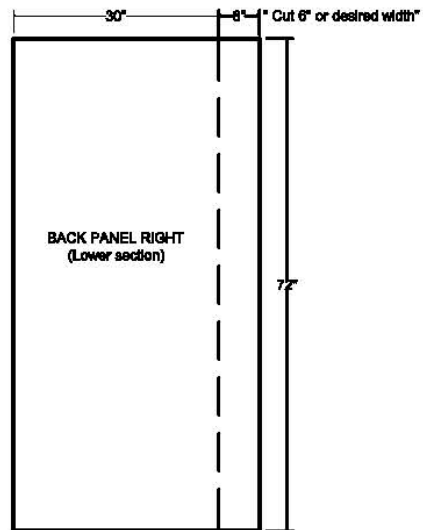


3. Install left wall panel

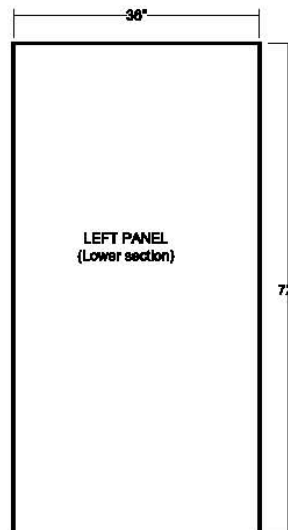

Match spacer back to lower panel and install panels using spacer back in middle vertical grout line for uniform grout lines


4. Start with ½ diamond in Right back corner wall, (2) strips for back wall, (2) strips for both right and left walls.



and run consecutively (4) strips for back wall, (2) strips for both right and left walls.


5a. Cut 42" or desired height from bottom of panel

5b. Install piece or inside knee wall

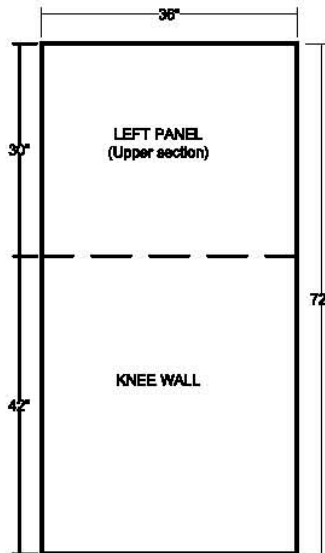

6a. Cut 6" or desired width from right side

6b. Cut panel at 30"

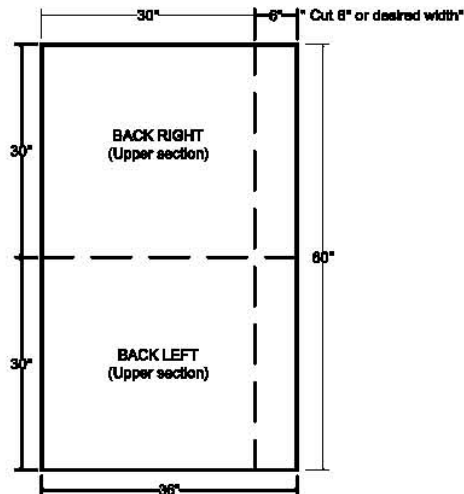

**Install** both pieces seamed together or back wall upper section.  
(Use spacer bar between design strip and upper section if desired)

7. **Install** left panel upper section from step # 5

(Use spacer bar between design strip and upper section if desired)

8. Starting at bottom of wall cut and install trim pieces consecutively around panels until finishing or top of knee wall.

9. **Install** 6" soap dish at desired height.

10. **Install** 10" soap dish at desired height.

11. Apply CEG epoxy grout into design strip grout lines.

12. Apply silicone caulk between trims, panels, and corner joints.

13. Clean and enjoy.

\*Coordinate panels to determine which panels should be seamed together based on color, shading and veining.

**\*Please follow all instructions in the SoterraSlate installation guide**