

# **Underscore®**

6' Bath **K-1834** 



#### **Features**

- Center drain.
- Slotted overflow for deep soaking.
- Integral lumbar support.
- 72" (1829 mm) x 36" (914 mm) x 23" (584 mm)

#### Material

Acrylic

#### Installation

Drop-in or under-mount.

## **Required Accessories**

K-7271 Brass Slotted Overflow Bath Drain

K-7272 PVC Slotted Overflow Bath Drain

#### **Recommended Accessories**

K-593 Under-mount Installation Kit K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-24916 Wireless Music Kit



#### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™






**KOHLER** 


6' Bath **K-1834** 


No change in measurement if connected with drain illustrated. (K-7272)



**Drop-In Rim Detail** 

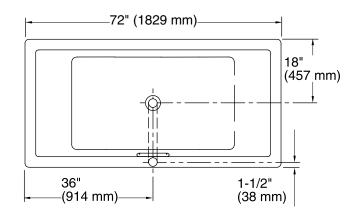



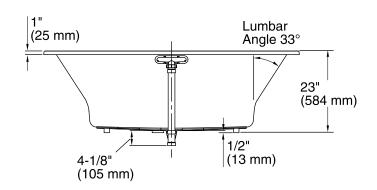

### **Technical Information**

All product dimensions are nominal.

Installation: Drop-in, Under-mount

Drain location: Center

Basin area, bottom: 45-3/4" x 25-15/16" (1162 mm x 659 mm) Basin area, top: 65-3/8" x 29-5/16" (1661 mm x 745 mm)

Weight: 82 lbs (37.2 kg)

Minimum floor load: 58 lbs/ft² (283.2 kg/m²)
Water depth: 19-7/16" (494 mm)
Water capacity: 112.9 gal (427.4 L)

Cutout: Drop-in, 71-1/2" x 35-1/2" (1816 mm x

902 mm)

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation

instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

