



# San Souci™

## Comfort Height® Touchless Toilet

### K-4000

#### Features

- Simply hold your hand over the sensor to activate.
- Powered by 4 AA batteries (included).
- Easy to clean concealed trapway.
- Compact elongated, space saving bowl.
- Large 3-1/4" canister flush valve features a powerful jet action, providing rapid water delivery from tank to bowl.
- High-efficiency system offers bulk flushing performance and best in class cleanliness.

#### Water Conservation & Rebates


- Significant water savings of as much as 16,500 gallons of water annually over a 3.5 gallon toilet.
- Meets strict flushing performance guidelines established by the EPA's WaterSense® program.
- Qualifies as an HET (High Efficiency Toilet). Consumer rebates are available in some municipalities.
- This product can help a building earn Water Efficiency points in the LEED Green Building Rating System.

#### Components

Product includes:

K-4008 Toilet seat

Additional included component/s: Tank Cover, Low Profile Bolt Cap Accessory Pack, Tank Accessory Pack, and Touchless Flush System.

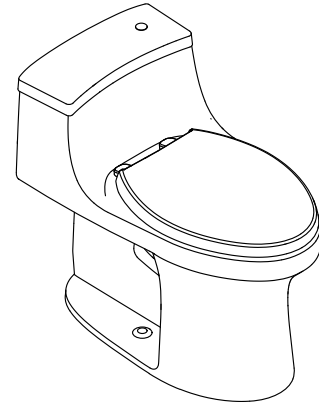

For complete listing of available colors, go to [kohler.com](http://kohler.com).



#### Codes/Standards

ASME A112.19.2/CSA B45.1


EPA WaterSense®

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Product Specification

Toilet shall be 27-3/4" (705 mm) in length, 16-3/8" (416 mm) in width, and 25-5/16" (646 mm) in height. Toilet shall be made of vitreous china. Toilet shall be one-piece. Toilet shall feature touchless flush actuation. Toilet shall be a 12" (305 mm) rough-in. Toilet shall be KOHLER Model K-4000.

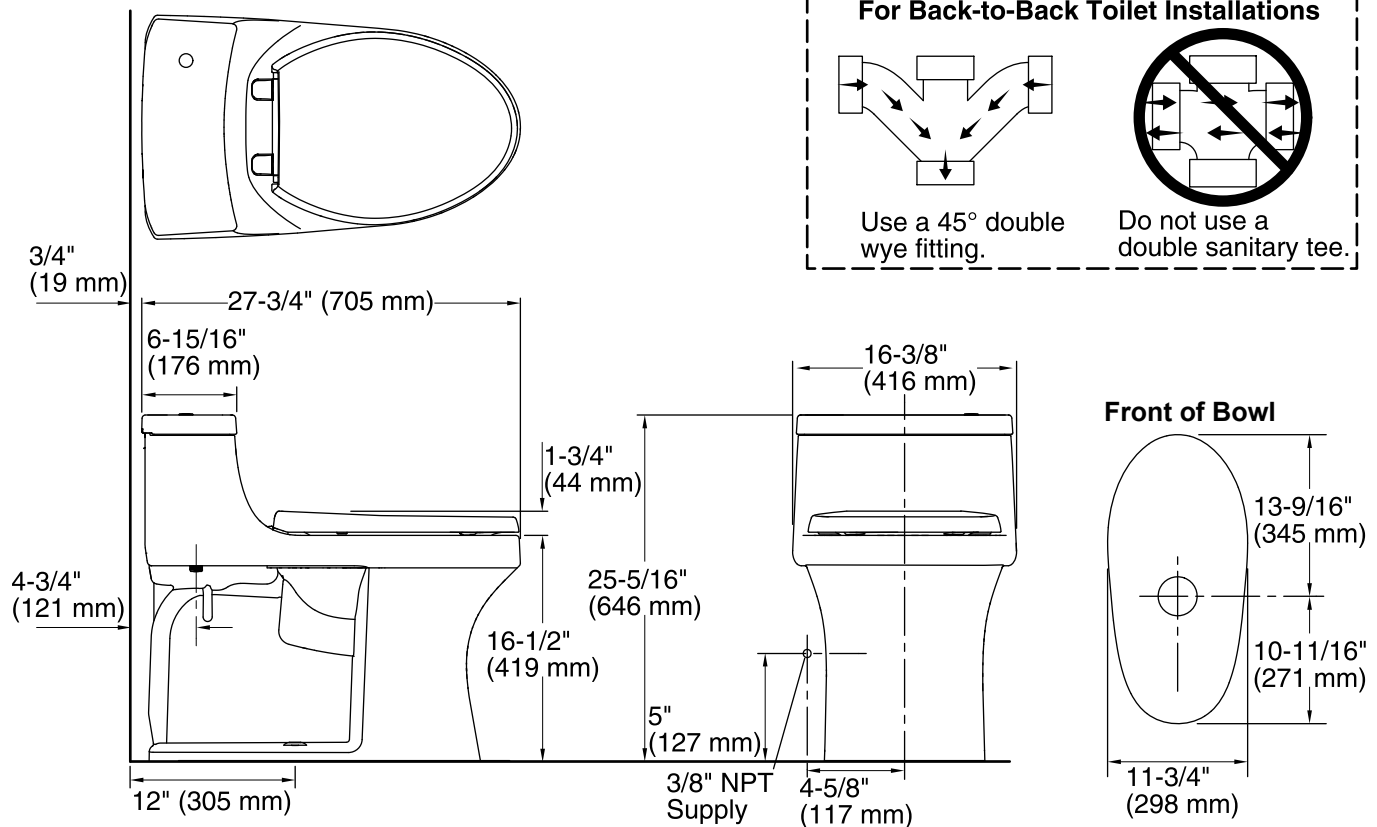

### Technical Information

All measurements are nominal.

Toilet style:	One-piece
Bowl shape:	Compact Elongated front
Seat hinge type:	Quick-Attach®, Quiet-Close™
Passageway:	2-1/8" (54 mm)
Flush rate - full:	1.28 gpf (4.8 lpf)
Water area:	10-3/4" x 7-1/2" (273 mm x 191 mm)
Rim to water height:	5-3/8" (137 mm)
Rough-in:	12" (305 mm)
Seat hole centers:	5-1/2" (140 mm)

### Installation Notes

Install this product according to the installation guide.

For back-to-back toilet installations: Use only a 45° double wye fitting.