



WALL FIXTURE

Instruction Manual

Please read carefully and save these instructions, as you may need them at a later date.

SAFETY

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.

READ & SAVE THESE INSTRUCTIONS

CAUTION: Before assembling the lighting fixture, refer to the section titled Wiring Connections. If you feel you do not have enough electrical wiring experience, either refer to a do-it-yourself wiring handbook or have your lighting fixture installed by a qualified, licensed electrician.

UNPACK THE PACKAGE

Check the contents to be sure everything is included

Tools Needed: Slotted screwdriver, Adjustable wrench, Step ladder, Wire cutters, Wiring supplies as required by electrical code.

INSTALLATION & OPERATION INSTRUCTIONS

GENERAL

Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the appropriate fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

All electrical connections must be in accordance with local and National Electrical Code (NEC) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

Remove the fixture and the mounting packages from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

Be sure to read these installation instructions and review the diagrams thoroughly before installation.


Assembly and Installation

1. Secure the mounting plate (5) to the outlet box (1) using the screws (6) provided.
2. **Wiring Connections:** Connect the white wire(s) from the fixture to the white wire of the supply circuit. Connect the black wire(s) from the fixture to the black wire of the supply circuit. Connect the green or bare copper wire to the ground wire of the supply circuit. Use UL/CSA listed wire connectors suitable for the size type, and number of conductors. No loose strands or loose wires should be present. Secure wire connectors with UL/CSA listed electrical tape.
3. Place back plate (8) onto screw (7) through the holes on back plate (8) and then secure with finial (9). Adjust screw (7) length as needed.
4. Place the shade (12) on the socket (13), Tighten the socket ring (11) to secure the shade (12) on to socket (13).
5. Screw the bulb (10) into the socket (13).

Re-lamping

1. Turn off the lamp at the switch and the main power supply.
2. Allow the fixture and bulb to cool before touching.
3. Remove the old bulb and insert a new bulb into the socket.
4. Restore the main power and turn on at the switch to check the operation of the bulb.

CAUTION: Refer to the re-lamping label near the lamp holder for recommended bulb type and maximum wattage allowed (bulbs sold separately).

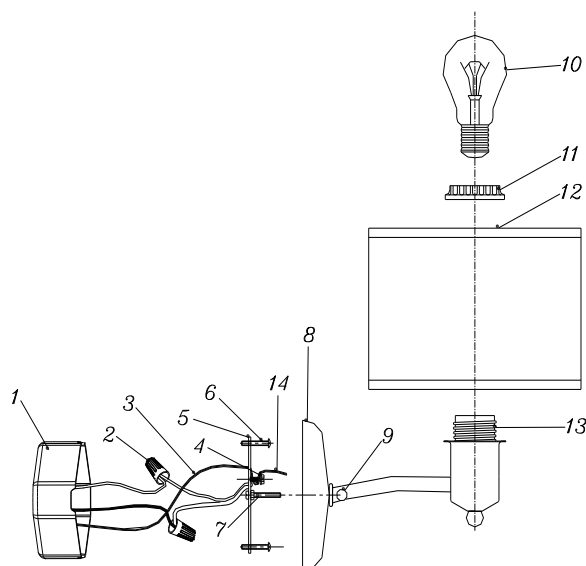

- | | |
|-----------------------|-----------------|
| 1. Junction Box | 8. Back plate |
| 2. Wire Connector | 9. Finial |
| 3. Ground Wire | 10. Bulb |
| 4. Ground Green Screw | 11. Socket Ring |
| 5. Mounting Plate | 12. Shade |
| 6. Screw | 13. Socket |
| 7. Screw | |