


This LED tube is intended to replace fluorescent tube lamps with an ANSI designation 32W/48T8/RS, 32W/48T8



### Questions?

For customer service please call us at 1-888-743-5766  
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday



## LED Hybrid Tube

### PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION

WARNINGS	CAUTIONS
<ul style="list-style-type: none"> <li>• Risk of fire / electrical shock</li> <li>• LED Hybrid Tube bypass ballast installation requires knowledge of luminaire electrical systems. (If you are not a qualified electrician, please do not attempt bypass ballast installation.)</li> <li>• Risk of electric shock – disconnect power at source before installation</li> <li>• Do not make or alter any open holes in an enclosure of wiring or electrical components during installation.</li> <li>• If lamp or luminaire exhibits abnormal operation (buzzing, flickering, minimal light, etc.), turn off power, remove lamp and contact us. For more information please visit <a href="http://www.eurilighting.com">www.eurilighting.com</a> or call our toll-free number 1-888-743-5766.</li> </ul>	<ul style="list-style-type: none"> <li>• Do not use with dimmers.</li> <li>• Do not look directly at the operating LED Hybrid Tube.</li> <li>• Do not touch this product with wet hands.</li> <li>• Do not disassemble, repair or alter lamp.</li> <li>• Designed for indoor applications only.</li> <li>• Suitable for damp locations.</li> <li>• The luminaires shall be grounded.</li> <li>• Be careful not to touch the lamp pins to the metal housing when installing.</li> <li>• This Device is not intended for use with emergency exits or emergency lights.</li> </ul>

### WHEN BYPASSING A BALLAST ALWAYS HAVE A QUALIFIED ELECTRICIAN DO YOUR ELECTRICAL WORK.


#### DIRECT REPLACEMENT INSTALLATION INSTRUCTIONS

1. Turn-off power before installation | 2. Replace traditional fluorescent tube with LED Hybrid tube | 3. Turn-on power and enjoy your new LED Hybrid Tube.


#### BYPASS BALLAST INSTALLATION INSTRUCTIONS

##### Single Ended Bypassing of Magnetic / Electronic Ballast

1. Turn-off power before installation.
2. Remove the existing ballast and existing starter (If present)
3. Replace fluorescent tube with **LED Hybrid Tube**

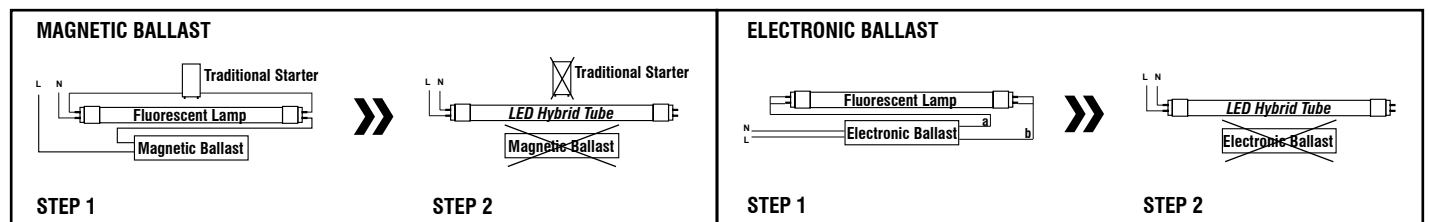

**FOR BYPASS INSTALLATION  
SINGLE ENDED INSTALLATION ONLY.  
(PROFESSIONAL INSTALLATION IS REQUIRED.)**



**WARNING!**  
DOUBLE ENDED INSTALLATION IS NOT RECOMMENDED  
DUE TO POTENTIAL RISK OF FIRE OR ELECTRIC SHOCK



THIS PRODUCT MAY NOT BE COMPATIBLE WITH ALL BALLASTS, FOR MORE INFORMATION ABOUT BALLAST COMPATIBILITY PLEASE VISIT: [WWW.EURILIGHTING.COM](http://WWW.EURILIGHTING.COM)