Installation and Operation Instructions

ELECTRIC FIREPLACE CAM56WMEF





READ & SAVE THESE INSTRUCTIONS

Carefully read and review before assembling, installing, operating or maintaining this product. Observe all safety instructions and information.


FAILURE TO FOLLOW WARNINGS & OPERATIONAL INSTRUCTIONS CONTAINED IN THIS MANUAL CAN RESULT IN PROPERTY DAMAGE OR PERSONAL INJURY.



TABLE OF CONTENTS

Tool list	3
Assembly Instructions	3-4
Important Safety Instructions	4-5
Listing Approvals	6
Glass Particles Installation	7
Instructions	8-9
Product Dimensions	10-11
Installation	12
Operating Instructions	12
Remote Control Instructions	13
Temperature Limiting Control	13
Troubleshooting	13
Cleaning	

Suggested tools: Phillip head screw driver, power drill, drill bit, and a tape measure. Unit needs to be hung on wall stud for more security and stability.

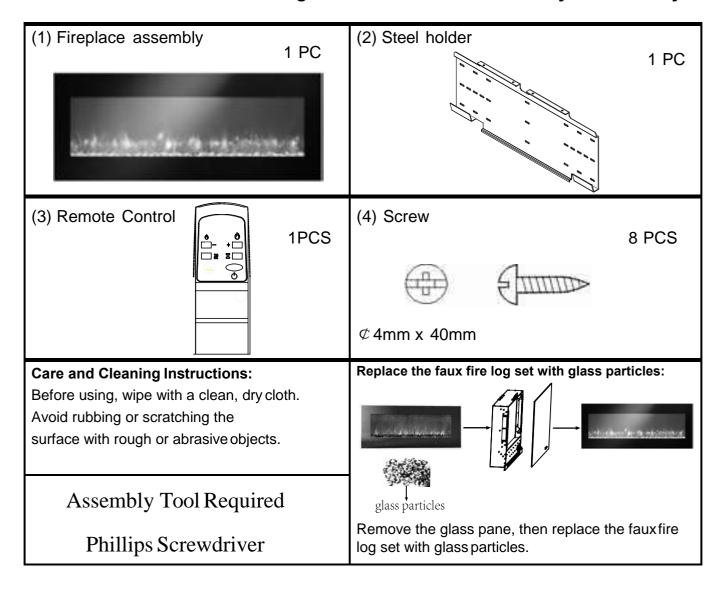

Quick Reference Guide

- 1. Prior to plugging your heater into a convenient outlet, first verify that the circuit breaker for the outlet is on.
- 2. The heater may emit a slight, harmless odor when first used. This odor is normal and it is caused by the initial heating of internal heater parts and will not occur again.
- 3. If the heater does not emit heat, consult your Practical User's Guide for further information.

CAUTION

RISK OF ELECTRIC SHOCK
DO NOT OPEN
NO USER-SERVICEABLE PARTS INSIDE
HIGH TEMPERATURE
KEEP ELECTRICAL CORDS, DRAPERY AND OTHER
FURNISHINGS AT LEAST 1 METRE FROM FRONT OF THE HEATER AND KEEP THEM AWAYFROM
THE SIDES OF HEATER

WARNING

RISK OF FIRE-KEEP COMBUSTIBLE MATERIAL AWAY FROM FR TOP OF HEATER. SERVICING SHOULD BE DONE ONLY WHILE THE HEATER IS UNPLUGGED FROM POWER SUPPLY.

The flame effect on the wall hanging fireplace is created by LED surface mounted components that are designed to last the life of the product. Do not remove back cover of heater, no user serviceable parts are contained within.

IMPORTANT SAFETY INSTRUCTIONS

When using electrical appliances, to reduce the risk of fire, electric shock and injury to persons, basic precautions should always be followed, including the following:

1. Read all instructions before use.

- 2. This heater is hot when in use. To avoid burns, do not let bare skin touch hot surfaces. If provided use handle when moving this heater.
- 3. Keep combustible materials such as furniture, pillows, bedding, papers, clothes, and curtains at least 7cm away from the front of heater and keep them away from the sides of heater.
- 4. Extreme caution is necessary when any heater is used by or near children or invalids and whenever heater is in operation and unattended.
- 5. Always unplug the heater when not in use.
- 6. Do not operate any heater with damaged cord or plug or after the heater has malfunctioned or has been dropped or damaged in any manner. Return heater to an authorized service facility for repair.
- 7. Do not use outdoors.
- 8. This heater is not intended for use in bathrooms, laundry areas and similar indoor locations. Never locate heaters where it may fall into a bath tub or other water container.
- 9. Do not run cord under carpeting. Do not cover cord with throw rugs, runners or the like. Arrange cord away from traffic areas and where it will not be tripped over.
- 10. To disconnect heater, turn control to off, then remove plug from outlet.
- 11. Connect to properly grounded outlet only.
- 12. Do not insert or allow foreign objects to enter any ventilation or exhaust opening as this may cause an electric shock or fire, or damage the heater.
- 13. To prevent a possible fire, do not block air intake or exhaust in any manner.
- 14. Do not use on soft surfaces, like a bed, where openings may become blocked.
- 15. A heater has hot and arcing or sparking parts inside. Do not use it in areas where gasoline, paint or flammable liquids are used or stored.
- 16. Use this heater only as described in manual. Any other use not recommended by the manufacturer may cause fire, electric shock, or injury to persons.
- 17. Avoid the use of an extension cord because the extension cord may overheat and cause a risk of fire.
- 18. Do not strike the heater glass.
- 19. Always use properly grounded, fused and polarized outlets.
- 20. Always disconnect power before performing any cleaning or maintenance, or relocation of the heater.
- 21. When transporting or storing the heater keep in a dry place, free from excessive vibration and store so as to avoid damage.
- 22. The flame effect is powered by a motor and it is normal for the motor to make some noise as it slowly rotates and helps to create the beautiful 3D flame effect. Some rooms have more or less furnishings than others resulting in varying noise amplification.
- 23. Whilst every effort is made to ensure packing materials are kept outside of the plastic bag which covers your heater in the box, there is a remote chance that some packing may lodge itself in the heater part of the unit. If you notice this on close inspection, please remove it. When turning your heater on for the first time it is normal for the heater to emit a little 'new heater' smell which quickly passes.
- 24. You may notice some light coming from under or from the sides of the unit. This is normal and the holes allow the unit to 'breathe'. Do not attempt to block these holes.
- 25. This heater is to be used on a 110 / 120 V, 11.2AMP, grounded circuit. Do not use in an outlet controlled by a switch or dimmer switch. The cord supplied with the heater, has a 2 blade plug, the round pin on the plug is for grounding purposes. If a 2 slot receptacle is not available, an adapter must be used, and the adapter must be properly grounded to the outlet box. Avoid plugging other appliances into the same circuit as heater.

LISTING APPROVALS

This heater has been tested in accordance with the CSA Standards.


Model Number:	X56WMEF
Description:	Wall Mount Electric Fireplace
Voltage:	120V AC, 60Hz
Watts:	MAX 1350W
Length:	56.0"
Height:	20.2 "
Depth:	4.7 "

GLASS PARTICLES INSTALLATION INSTRUCTIONS


- 1. Removing the outer glass around the bracket, mounting screws (red arrows) (①、②)
- 2. Remove the outer glass, to be put flat, scratch concern (3)
- 3. glass particles into the slot neatly bagged glass (4)
- 4. Need to be cautious about the outer glass bracket screws (5)




PRODUCT DIMENSIONS

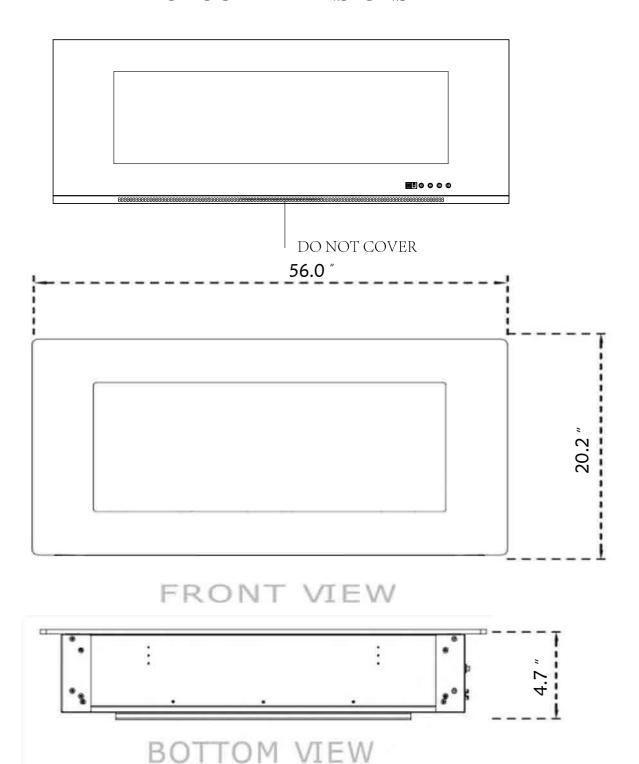





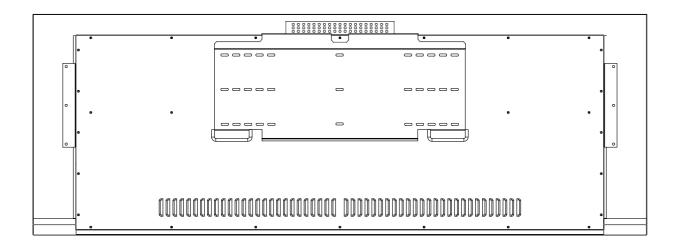

BACK VIEW

PRODUCT DIMENSIONS

WARNING: Due to high temperatures, this electric fireplace should be located out of traffic. Keep combustible materials such as furniture, pillows, bedding, papers, clothes and curtains at least 0.9m from the top of the heater.

WARNING: Never locate this electric fireplace where it may fall into a bathtub or other water container.

CAUTION: Do not expose the electric fireplace to the elements (such as rain, ect.)

WARNING: To prevent contact with sagging or loose insulation, the electric fireplace must not be installed against vapor barrier or exposed insulation. Localized overheating could occur and a fire could result.

UNPACKING AND TESTING FIREPLACE

Carefully remove the unit from the box. Prior to installing the unit, test to make sure the unit operates properly. To do this, plug the unit's power supply cord into a conveniently located 120 Volt grounded outlet.

INSTALLATION

WARNING: RISK OF FIRE! The power cord must not be pinched or against a sharp edge. Secure cord to avoid tripping or snagging to reduce risk of fire, electric shock or personal injury. Do not run cord under carpeting. Do not cover cord with throw rugs, runners or other fabric. Arrange cord away from traffic area and where it will not be tripped over.


WARNING: RISK OF FIRE! To prevent a possible fire, do not block air intake or exhaust in any manner. Do not use on soft surfaces where openings may become blocked.

WARNING: RISK OF FIRE! Do not blow or place insulation against the fireplace.

WARNING: This electric fireplace is tested and listed for use only with the approved optional accessories. Use of optional accessories not specifically tested for this electric fireplace could void the heater warranty and/or result in a safety hazard.

WARNING: If the information in these instructions is not followed exactly, a fire or explosion may result causing property damage, personal injury or death. Do not store or use gasoline or other flammable vapors in the vicinity of this or any other heater.

INSTALLATION

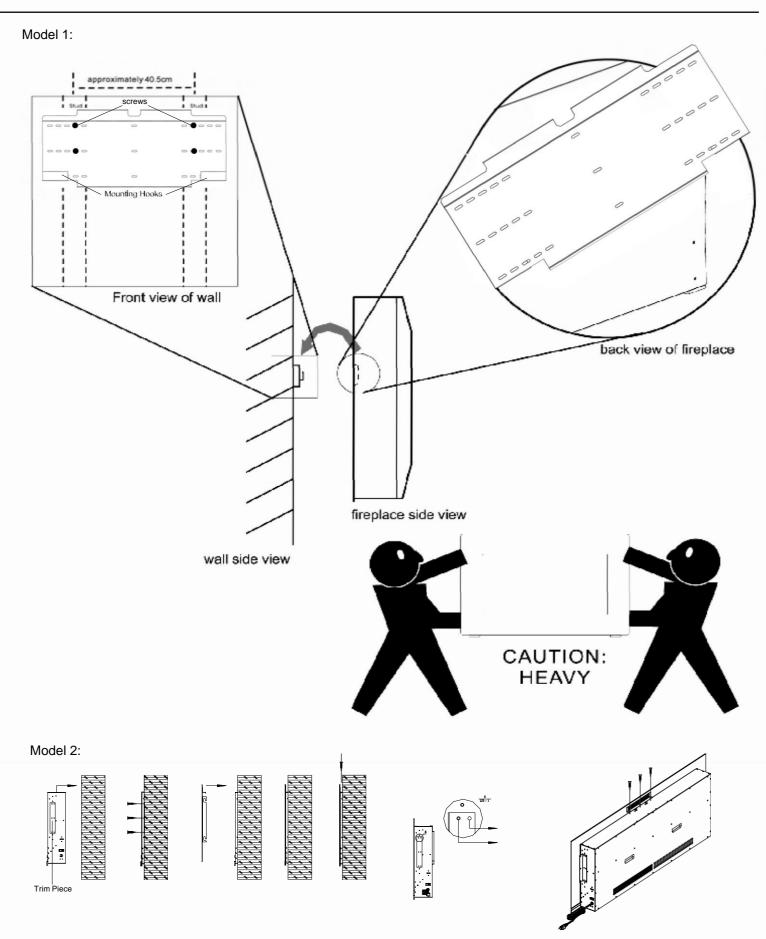

Remove the glass pane first, set the fire box into the wall. secure the side trim pieces on the wall with screws. Reinstall the glass pane onto the firebox with screws.

OPERATING INSTRUCTIONS

The manual controls are located on the left side of the fireplace.

You have the following controls:



- 1.Power ON/OFF: Power to the unit.
- 2.Push the flame button for desired flame, it has 5classes flame to adjust from L1-L2-L3-L4-L5-L1...and so on.It appears the related flame on the digitalscreen.
- 3.Low heat:700 watts(LO), High heat: 1350 watts(HI)
- 4. Display shows the current temperature of the boot.

REMOTE CONTROL INSTRUCTIONS


1.Power ON/OFF: Power to the unit.

2.Push the flame button for desired flame, it has 5classes flame to adjust from L1-L2-L3-L4-L5-L1-L2...and so on. It appears the related flame on the digital screen.

3.Low heat: 700 watts(LO), High heat: 1350 watts(HI)

4. Timing, This fireplace is equipped with a timer can program from 1 hour to 9 hours. Press the timer command to a desired time (appears ra digital screen from '1H' distance 9H'cuando settings, and so on). After adjustment, it appears the Celsius available.

NOTE: Make sure your batteries are fully charged and installed correctly in your remote control.

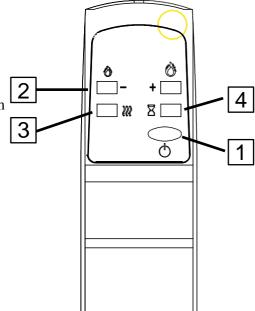

The remote control uses CR025 batteries

TEMPERATURE LIMITING CONTROL

This heater is equipped with a Temperature Limiting Control. Should the heater reach an unsafe temperature, (115 degrees Celsius) the heater will automatically turn off. To reset: Unplug unit from wall, wait for 5 minutes, plug back in and continue to use.

TROUBLESHOOTING



WARNING: Turn off the fireplace completely and let cool before servicing.

OBSERVED PROBLEM	POSSIBLE CAUSE	REMEDY
No warm air is coming out of the heater. Heat doesn't turn on when it is set to Low setting.	Room temperature is higher than the heater setting (if It is set to LO or MED)	Set heater to a higher temperature setting (MED or HI)
Fireplace turns off and will not turn on	Fireplace has overheated and safety device has caused the thermal switch to disconnect House circuit breaker has tripped	1. Unplug the unit, allow heater to cool for 10 minutes, then plug back in 2. Reset house circuit breaker
Fireplace will not come on when switch is flipped to ON	1. Fireplace is not plugged into an electrical outlet 2. Fireplace has overheated and safety device has caused the thermal switch to disconnect	1. Check plug and plug It in 2. Unplug the unit, allow heater to cool for 10 minutes, then plug it back in
Remote control does not work	Low batteries	Replace AAA batteries in remote control The remote takes 2 x AAA batteries

CLEANING

Turn heater OFF and unplug from outlet. Use a vacuum or duster to keep heat and vent area clean from dust and dirt. The exterior of the stove should be cleaned with a damp cloth or duster. Do not use abrasive cleaners, liquid sprays, or any other cleaner that may scratch the surface.