JVW5301SJ/EJ GE® 30" Wall-Mount Pyramid Chimney Hood

Dimensions and Installation Information (in inches)


Installation Information:


Before installing, consult Use & Care/installation instructions packed with product for current dimensional data.

Optional Accessories

JXDC72SS/ES-Chimney Height Kit
Max ceiling height installation with kit - 10'-0"
JXRC70-Remote Control
JXCF72-Charcoal Filter
(needed if used in recirculation mode)

Amp Rating	
120V	3.5



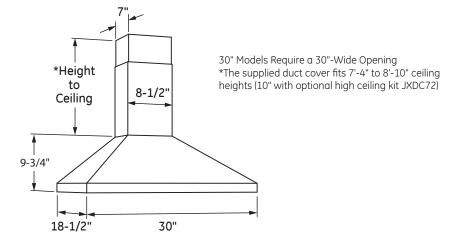

The vent hood must be installed 24" min. and 36" max. above the cooking surface. The hood installation height above the cooking surface depends upon ceiling height. The telescopic duct cover conceals the ductwork running from the top of the hood to the ceiling.

NOTE: Installation height should be measured from the cooking surface to the lowest part of the hood. This hood may be installed onto a wall and vented to the outdoors, or it can be installed for recirculating operation. Parts for recirculating operation are supplied with the hood. However, when installed for recirculating operation, the optional charcoal filter JXCF72 will need to be purchased separately.





JVW5301SJ/EJ GE® 30" Wall-Mount Pyramid Chimney Hood

Features and Benefits

- 370-CFM venting system with boost Effectively remove smoke, grease, odor and moisture
- Electronic backlit controls Add a sophisticated look with this up-front, easy-to-use display
- Dual halogen lighting Enjoy better visibility with a brightly lit cooktop and surrounding surface
- Convertible venting options Select recirculating or external venting
- Remote control option Control your ventilation lighting and fan speed from anywhere in the kitchen
- Auto-off Set the vent hood to automatically shut off after 15 minutes
- Night light Keep a dim light on for visibility at all hours
- Dishwasher safe filter Filters grease and is dishwasher-safe
- Model JVW5301SJSS Stainless steel
- Model JVW5301EJES Slate

