

Features

- Single lever handle allows for both on/off activation and temperature setting.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Includes Artifacts[®] handshower and a 60" hose.
- 8 gpm maximum flow rate (30 l/min) @ 60 psi.
- Coordinates with Artifacts[®] faucets, accessories and showering components to complete your bathroom.

Material

- Premium Metal Construction.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- Floor-mount
- Compatibility with tub varies by application.

Required Accessories

K-97339 Multiproduct Mounting-block





Codes/Standards ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.




Artifacts™

Floor-Mount Bath Filler Trim K-T72790-9M

KOHLER, Faucets

Artifacts[™] Floor-Mount Bath Filler Trim K-T72790-9M

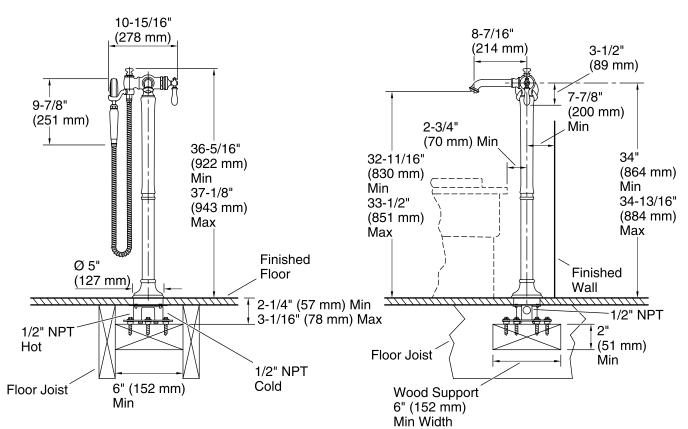

Technical Information

All product dimensions are nominal.

Faucet:

| Flow rate: | 8 gal/min (30.3 l/min) |
|-------------|------------------------|
| Pressure: | 45 psi (3.1 bar) |
| Valve body: | Composite |

Valve body:

Spout:

| Spout reach: | 8-7/16" (214 mm) |
|-------------------|------------------|
| Handle clearance: | 3-1/2" (89 mm) |

Handshower:

Rated maximum flow: 2 gal/min (7.6 l/min) 80 psi (5.5 bar) Pressure:

Notes

For use with automatic compensating valves rated at 1.6 gal/min (6.1 l/min) or less.

For use with automatic compensating valves rated at 1.6 gal/min (6.1 l/min) or less.

Install this product according to the installation instructions.

Adequate floor support is required. The wood support must be a minimum of 2" (51 mm) thick by 6" (152 mm) wide. 2x6 lumber is NOT adequate for this application.

Concrete can be used as the floor support. Requires 3/16" masonry drill bit and six 1/4" x 1-3/4" concrete screws, not included.

