

Installation Instructions Step/Deck Light

MB520 / MB530

Thank you for purchasing the Mr Beams® Step/Stair Light. We are committed to eliminating darkness using the latest in Light-Emitting Diodes (LEDs). LEDs are the most efficient and durable light sources available. We are certain that your light will contribute to a safer environment and provide light where you need it at a very reasonable cost.

What is included per light:

- · Motion Sensor Step/Stair Light
- · 2 Screws
- · 2 Anchors

What you need to install:

- 1 Small Screwdriver
- 3 C-Cell Alkaline Batteries

Step/Stair Light Features:

Motion/Light Sensor: Light instantly turns on when it detects motion from up to 15 feet away. The light sensor conserves battery life by preventing light from activating in daylight.

Auto Shut-off: Light shuts off automatically after 20 or 60 seconds (optional) if no motion is detected.


Glow Mode Option: Emits soft glow when darkness is sensed for safety.

Bright LED: 35 Lumens covers up to 120 sq ft.

Durable, Weather Resistant: Tight seals and UV resistant material allow the Mr. Beams Light to work in all weather conditions.

Tips:

- Use only new alkaline C-Cell batteries with 1.5V rating.
- Do not mix old and new batteries. If batteries are not new, it may cause the light to malfunction.
- Install batteries with polarity in correct position.
- Light may activate when batteries are inserted. Simply take light into a dark room. Allow batteries to settle, then test activation.
- If your light will not turn off, it means that it is time to replace the batteries.

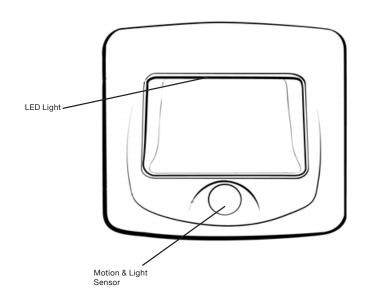

NOTE: Light sensor only allows light to activate in darkness. We recommend you test in a dark room or closet.




1. Remove rear cover of light by removing 2 screws on back.




2. Set auto shut-off to 20 or 60 seconds. Setting to min will extend battery life.




3. Set "GLOW" to on if you want it to glow in darkness or off for no glow. Setting to off will extend battery life.



4. Insert 3 C-Cell batteries.



5. Determine location for mounting the light. Flip rear cover upside down and use holes for thumb screws as template to mark two holes for anchors and/or screws (included). We recommend mounting the screws parallel to the ground if mounting on a vertical surface. Make sure that screws are precise distance from each other as defined by the distance of the thumb screw holes. Replace rear cover and tighten screws.



6. If using anchors, use 3/16" drill bit to drill holes and insert anchors. Drive screws into anchors so that screw head potrudes 1/8" from the surface. If using only screws, us 1/8" drill bit to drill holes and insert screws so that screw head protrudes 1/8" from the surface.

7. Slide light down so screws are securely held by track.

Battery Caution:

- Do not mix old and new batteries
- 2) Do not mix Alkaline, Standard (Carbon-Zinc) or Rechargeable (Nickel Cadmium)
- or (Nickel Metal Hydride) batteries
- 3) Do not dispose of batteries in fire
- 4)Batteries should be recycled or disposed of as per state and local guidelines



