

Specifications:

Range:

0-9990ppm ; 0-99C° ; 32-212F°

Accuracy:

2% full scale ±1C°; ±2F°

Calibration:

factory calibrated

Auto shut-off:

10 minutes

Temperature compensation:

Automatic

Operating temperature:

0C° to 50C° ; 32F° to 106F°

Power source:

2 x 1.5V (button cell)

Size:

6.14 x 1.18 x 0.79 in

Weight:

1.76 oz



TDS Meter

Warranty:

This meter is guaranteed from all defects in material and production for a period of one year from the date of purchase. If repair or replacement is required within the warranty period, and damage is not due to negligence or erroneous operation by the user, return the meter to either your dealer or to our offices for repair or replacement.

To contact our office:

Please call **(678)261-7611** or

Email us at: sales@ispringfilter.com


Test Water Quality

- Tap Water
- Bottled Water
- Filtered Water
- Aquarium
- Spring Water
- Any Water

For quality drinking water, we recommend iSpring's bestselling multi-stage RO systems.

Please visit us at:
www.123filter.com

for more product information.

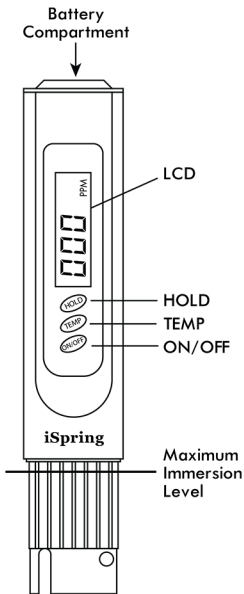

Operating Instructions:

1. Remove the protective cap.
2. Press the ON/OFF button to turn the meter on. The tester will read "000".
3. Immerse the tester in the water no more than 2 inches.
4. Wait for the display to stabilize. The tester automatically compensates for temperature variations. Once the readout stabilizes (10-30 seconds), press the HOLD button to view out of the water.
5. Press the ON/OFF button again to turn off the tester. The tester will shut off automatically after 10 minutes of non-use.
6. After usage, shake off the water from your tester or clean it with clean tissue. Then, put the protective cap back on and insert it back into the sleeve.

Note:

1. Do not immerse the entire meter in the water or immerse beyond the maximum immersion level of 2 inches.
2. The meter is not meant to be for hot water.
3. If the tester displays a flashing "X10" icon, multiply the reading by 10.



TDS in parts per million (PPM)

