

PENTEK 3G SLIM LINE SERIES FILTER HOUSINGS

SLIM DESIGN AND CHEMICAL COMPATIBILITY ARE AN IDEAL CHOICE FOR LOW-FLOW APPLICATIONS



Pentair Pentek[®] 3G Slim Line[®] Housings are the perfect choice for low-flow filtration applications. Their slim design and high chemical compatibility make them ideal for those challenging applications.

Caps are manufactured from reinforced polypropylene in black, blue, and white. Three different style caps add to the flexibility of these housings. The mounting bracket cap allows the housing to be mounted to a single or multiple housing bracket.

The bracket is built into the integral bracket cap. The meter mount cap's gauges indicate when the cartridge is dirty and allow you to get the most out of your cartridges.

Housings are available with either clear or opaque sumps with the clear housings being manufactured of Styrene-Acrylonitrile (SAN) and the opaque housings are polypropylene. Clear housings offer on-site examination of the flow, cartridge life and performance. Opaque housings are molded from reinforced polypropylene and offer outstanding chemical compatibility.

FEATURES/BENEFITS

10" housings available with clear or opaque sump	Housing accepts DOE (double open end) cartridges
Buttress threads for additional strength and easier cartridge changes	Leak-proof seal
John Guest and NPT threaded connections offered in 1/4", 3/8", and 1/2"	Pressure relief button helps reduce pressure in housing when changing cartridges
Cap styles include mounting bracket, integral bracket, meter mount and optional pressure relief bleed valve	

SPECIFICATIONS

Housing – Polypropylene (opaque) or Styrene Acrylonitrile (clear)	O-Ring – #237 Buna-N
Cap – Reinforced polypropylene	Temperature Rating- 40-125°F (4.4-51.7°C)
Button Assembly – 300-Series stainless steel, EPDM, and polypropylene	Maximum Pressure- 125 psi (8.6 bar)

SPECIFICATIONS AND PERFORMANCE

PART #	DESCRIPTION (#10 3G SLIM LINE)	MAXIMUM DIMENSIONS	INITIAL ΔP (PSI) @ FLOW RATE (GPM)
158598	1/4" Black/Blue Mounting Bracket Cap w/PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 3 gpm (0.14 bar @ 11 Lpm)
158599	1/4" Blue/Clear Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 3 gpm (0.14 bar @ 11 Lpm)
158601	1/4" White/White Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 3 gpm (0.14 bar @ 11 Lpm)
158603	1/4" Black/Blue Quick-Change Mounting Bracket Cap w/PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 3 gpm (0.14 bar @ 11 Lpm)
158604	1/4" Blue/Clear Quick-Change Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 3 gpm (0.14 bar @ 11 Lpm)
158606	1/4" White/White Quick-Change Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 3 gpm (0.14 bar @ 11 Lpm)
158637	1/4" Blue/Clear Integral Bracket Cap w/PR	13.75" x 5.38" (349 mm x 137 mm)	2 psi @ 3 gpm (0.14 bar @ 11 Lpm)
158638	1/4" White/White Integral Bracket Cap w/PR	13.75" x 5.38" (349 mm x 137 mm)	2 psi @ 3 gpm (0.14 bar @ 11 Lpm)
158639	1/4" Black/Blue Quick-Change Integral Bracket Cap w/PR	13.75" x 5.38" (349 mm x 137 mm)	2 psi @ 3 gpm (0.14 bar @ 11 Lpm)
158641	1/4" White/White Quick-Change Integral Bracket Cap w/PR	13.75" x 5.38" (349 mm x 137 mm)	2 psi @ 3 gpm (0.14 bar @ 11 Lpm)
158602	1/4" Black/Blue Quick Change Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 3 gpm (0.14 bar @ 11 Lpm)
158608	3/8" Black/Blue Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158610	3/8" Blue/Clear Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158614	3/8" Black/Blue Quick-Change Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158616	3/8" Blue/Clear Quick-Change Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158619	3/8" White/White Quick-Change Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158642	3/8" Black/Blue Integral Bracket Cap w/PR	13.75" x 5.38" (349 mm x 137 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158643	3/8" Blue/Clear Integral Bracket w/PR	13.75" x 5.38" (349 mm x 137 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158644	3/8" White/White Integral Bracket Cap w/PR	13.75" x 5.38" (349 mm x 137 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158647	3/8" White/White Quick-Change Integral Bracket w/PR	13.75" x 5.38" (349 mm x 137 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158620	1/2" Black/Blue Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158621	1/2" Black/Blue Mounting Bracket Cap w/PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158622	1/2" Blue/Clear Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158623	1/2" Blue/Clear Mounting Bracket Cap w/PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158625	1/2" Black/Blue Quick-Change Mounting Bracket Cap w/o PR	11.75" x 4.75" (298 mm x 121 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158648	1/2" Black/Blue Integral Bracket w/PR	13.75" x 5.38" (349 mm x 137 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158649	1/2" Blue/Clear Integral Bracket w/PR	13.75" x 5.38" (349 mm x 137 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)
158794	1/2" Black/Clear Integral Bracket w/PR	13.75" x 5.38" (349 mm x 137 mm)	2 psi @ 5 gpm (0.14 bar @ 19 Lpm)

CAUTION: Protect against freezing to prevent cracking of the filter and water leakage.

ACCESSORIES

PART #	DESCRIPTION
150539	SW-1A Wrench for Slim Line
155003	Cartridge Coupler for Standard Cartridges
151121	Buna-N #237 O-ring for Slim Line
158095	Viton #237 O-ring for Slim Line
158096	Silicone #237 O-ring for Slim Line
244047	SL-ZP Kit - Zinc Plated Bracket for Slim Line
357638	SL-SS - Stainless Steel Bracket ONLY for Slim Line
357644	SL-SS Kit - Stainless Steel Bracket for Slim Line
244046-00	SL-ZP - Zinc Plated Bracket ONLY for Slim Line
244627-02	Two-Housing System Bracket



WATER QUALITY SYSTEMS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209

P: 262.238.4400 | F: 262.238.4404

WATERPURIFICATION.PENTAIR.COM | WWW.PENTAIRINDUSTRIAL.COM

CUSTOMER CARE: 800.279.9404 | tech-support@pentair.com


© 2016 Pentair Residential Filtration, LLC. All rights reserved.

§For a detailed list of where Pentair trademarks are registered, please visit waterpurification.pentair.com/ brands. Pentair trademarks and logos are owned by Pentair plc or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners.

310120 REV D MY16

PRESSURE DROP VS FLOW RATE

Based on 3G Slim Line

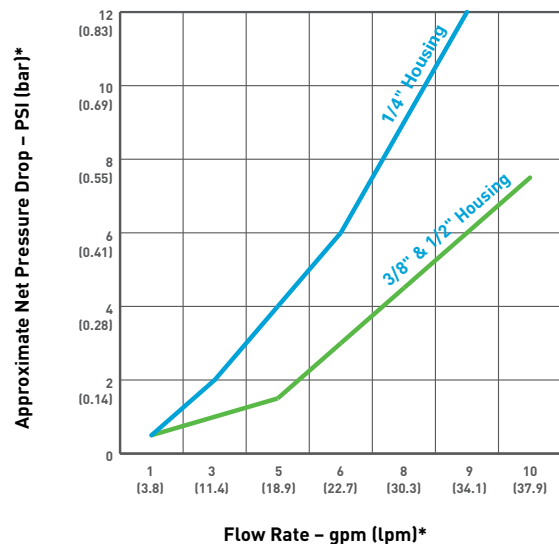

* Pressure drop and flow rate based on housing without cartridge.