



DLEC888W

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS

A Width	24"
B Height	33-1/2"
C Depth	25-1/4"
D Depth with door open	45"
Carton (WxHxD)	26" x 35-3/4" x 27-3/4"
Weight (Product/Carton)	Electric 105 lbs / 115 lbs


POWER SOURCE

Ratings	TBD
Electrical Requirements	240V, 30 Amps (Electric)
Type	Electric (product rating label 13A)




CONNECTING ELECTRIC DRYERS

- A **4-wire connection** is required for all mobile and manufactured home installations, as well as all new construction **after January 1, 1996**.
- A **3-wire connection is NOT permitted** on new construction **after January 1, 1996**.
- A UL-listed strain relief is required.
- Use a 30-amp, 240-volt, 4-wire, UL-listed power cord with #10 AWG-minimum copper conductor and closed loop or forked terminals with upturned ends.

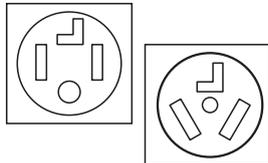

DIMENSIONS / CLEARANCES

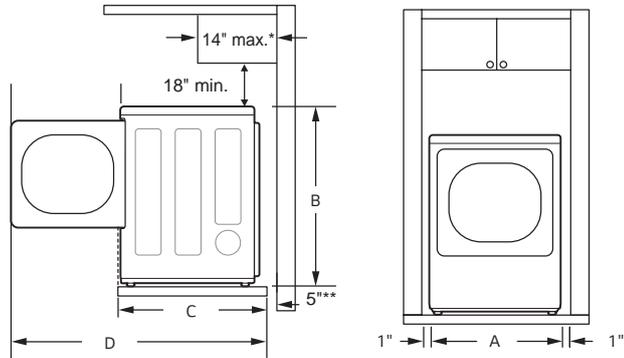

* Required spacing

** For side or bottom venting, 2-inch (5.1 cm) of spacing is allowed.



VENTILATION REQUIREMENT

Alcove or Under counter

- Ensure air flow of 112 cu.ft./min through dryer

Closet

- Closet door must have 2 (louvered) openings, each having a minimum area of 60 sq. inches (387 sq.cm), located 3 inches (8 cm) from bottom and top of door.

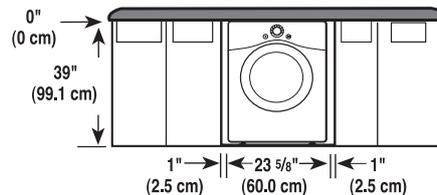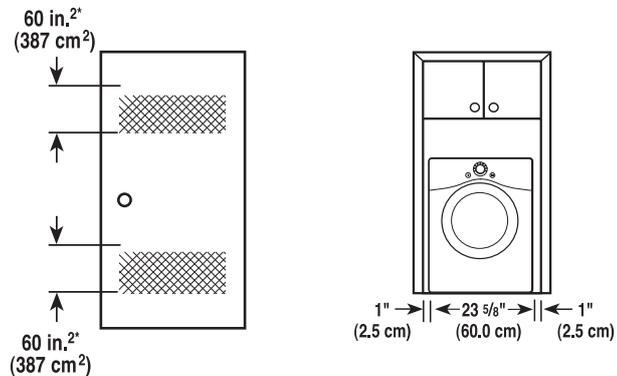

* The appearance and specifications are subject to change without manufacturer's notice.



WM1388HW

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS

A Width	24"
B Height	33-1/2"
C Depth	25-1/4"
D Depth with door open	45"
Carton (WxHxD)	26" x 35-3/4" x 27-3/4"
Weight (Product/Carton)	147.7 lbs / 156.5 lbs

POWER SOURCE


Ratings	TBD
Electrical Requirements	120V, 10 Amps
Type	Electric

CONNECT TO THE POWER SUPPLY

- The washer should be plugged into a 120-VAC, 60-Hz grounded 3-prong outlet. Plug in the washer. Improper connection of the equipment-grounding conductor can result in risk of electric shock. Check with a qualified electrician or service technician if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance. If it does not fit the outlet, have a proper outlet installed by a qualified electrician. Failure to follow these warnings can cause serious injury, fire, electrical shock, or death.
- The power outlet must be within 60 inches (1.5 m) of either side of the washer.
- The appliance and outlet must be positioned so that the plug is easily accessible.
- Do not overload the outlet with more than one appliance.
- The outlet must be grounded in accordance with current wiring codes and regulations.
- Time-delay fuse or circuit breaker is recommended.
- It is the personal responsibility and obligation of the product owner to have a proper outlet installed by a qualified electrician.



DIMENSIONS / CLEARANCES

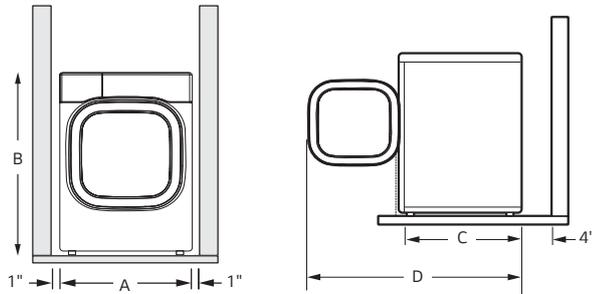


- Install the washing machine on a solid floor that is strong and rigid enough to support the weight of the washing machine, even when fully loaded, without flexing or bouncing. If the floor has too much flex, you may need to reinforce it to make it more rigid. If the floor is not solid, it may cause severe vibration and noise.

CONNECTING THE WATER LINES


LG recommends the use of LG hoses. Any leaking, property damage, or damage to the washing machine caused by an improper installation or by the use of non-LG hoses is not covered under the terms of the LG warranty and is the sole responsibility of the customer and/or an installer.

- Water supply pressure must be between 20 psi and 120 psi (138-827 kPa). If the water supply pressure is more than 120 psi, a pressure reducing valve must be installed.
- Inspect the threaded fitting on each hose and make sure there is a rubber seal in place in both ends of each hose.
- Connect the water supply hoses to the HOT and COLD water faucets tightly by hand and then tighten another 2/3 turn with pliers.
- Always run a gallon or two of water through each inlet hose to flush dirt, scale and other debris out of the water lines. Doing so will help prevent future problems with clogged filter screens, and will also allow you to verify which water line is hot and which is cold.
- Attach the hot water line to the hot water inlet on the back of the washer. Attach the cold water line to the cold water inlet on the back of the washer. Tighten the fittings securely. Turn ON both faucets all the way and check for leaks at both ends of the hoses.

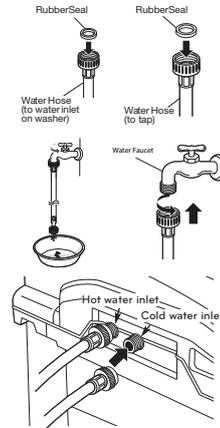

CONNECTING THE DRAIN HOSE

- The drain hose should always be properly secured. Failure to properly secure the drain hose can result in flooding and property damage.
- The drain must be installed in accordance with any applicable local codes and regulations.
- Make sure that the drain hose is not stretched, pinched, crushed, or kinked.
- Normal height of the end of the hose should be approximately 35"-47" (0.9-1.2 m) from the floor.
- Do not install the end of the drain hose lower than 29 in. (73.7 cm) or higher than 96 in. (243.8 cm) above the bottom of the washer or more than 60 in. (152.4 cm) away from the washer.
- Never create an airtight seal between the hose and the drain with tape or other means. If no air gap is present, water can be siphoned out of the tub resulting in poor wash/rinse performance or clothing damage.

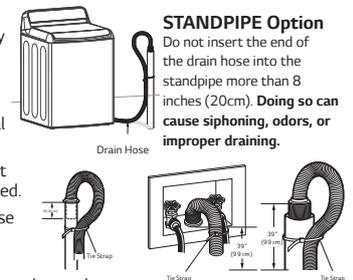

LAUNDRY TUB Option
Do not use this drain hose with a floor drain. The end of the drain hose must be at least 29 inches above the floor for proper draining to occur.



WM3488H*

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.


DIMENSIONS

A	Width	24"
B	Height	33-1/2"
C	Depth	25-1/4"
D	Depth with door open	45"
Carton (WxHxD)		26" x 35-3/4" x 27-3/4"
Weight (Product/Carton)		156.5 lbs / 165.3 lbs

POWER SOURCE

Ratings	TBD
Electrical Requirements	120V, 10 Amps
Type	Electric

DIMENSIONS / CLEARANCES

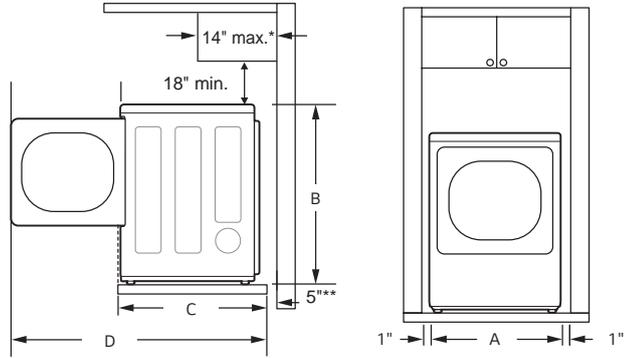


* Required spacing

** For side or bottom venting, 2-inch (5.1 cm) of spacing is allowed.

CONNECTING ELECTRIC DRYERS

- A **4-wire connection** is required for all mobile and manufactured home installations, as well as all new construction **after January 1, 1996**.
- A **3-wire connection is NOT permitted** on new construction **after January 1, 1996**.
- A UL-listed strain relief is required.
- Use a 30-amp, 240-volt, 4-wire, UL-listed power cord with #10 AWG-minimum copper conductor and closed loop or forked terminals with upturned ends.

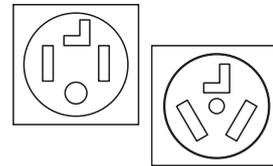



WM3997HWA

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.


DIMENSIONS

A	Width	27"
B	Height	38-11/16"
C	Depth	29-3/4"
D	Depth with door open	55-3/4"
E	Minimum vertical space	56"
Carton (WxHxD)		29-1/2" x 42-1/4" x 31-1/4"
Weight (Product/Carton)		211 lbs/225.8 lbs

POWER SOURCE

Ratings	UL Listed
Electrical Requirements	120V, 10 Amps
Type	Electric

DIMENSIONS / CLEARANCES

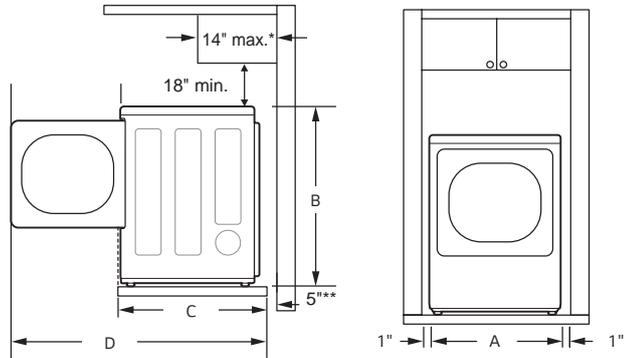


* Required spacing

** For side or bottom venting, 2-inch (5.1 cm) of spacing is allowed.

CONNECTING ELECTRIC DRYERS

- A **4-wire connection** is required for all mobile and manufactured home installations, as well as all new construction **after January 1, 1996**.
- A **3-wire connection is NOT permitted** on new construction **after January 1, 1996**.
- A UL-listed strain relief is required.
- Use a 30-amp, 240-volt, 4-wire, UL-listed power cord with #10 AWG-minimum copper conductor and closed loop or forked terminals with upturned ends.

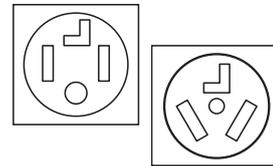



S3RERB

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS




Dimensions (WxHxD)	17-1/2" X 72-3/4" x 23"
Product Weight	183 lbs
Shipping Weight	207 lbs
Clearances	2" Side/Back, 7-3/4" Top

POWER SOURCE

Ratings	CSA Listed
Electrical Requirements	120V, 12.5 Amps
Watts	1,500
Type	Electric

RECOMMENDED INSTALLATION SPACING

The following clearances are recommended for the Styler. The Styler has been tested for clearances of 13/16 inch (3 cm) on the sides and rear.

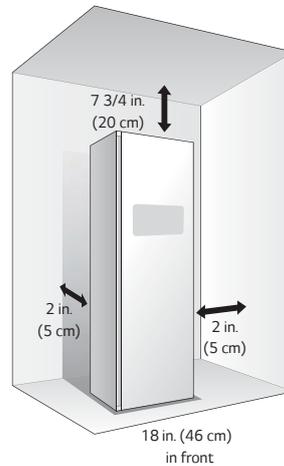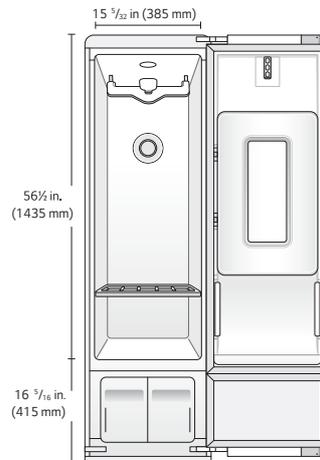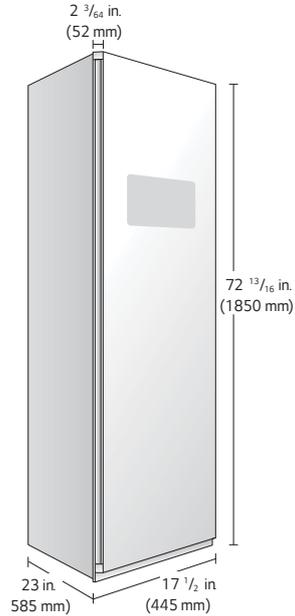



S3WERB

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS

Dimensions (WxHxD)	17-1/2" X 72-3/4" x 23"
Product Weight	183 lbs
Shipping Weight	207 lbs
Clearances	2" Side/Back, 7-3/4" Top

POWER SOURCE

Ratings	CSA Listed
Electrical Requirements	120V, 12.5 Amps
Watts	1,500
Type	Electric

RECOMMENDED INSTALLATION SPACING

The following clearances are recommended for the Styler. The Styler has been tested for clearances of 13/16 inch (3 cm) on the sides and rear.

