

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides years of maintenance-free general illumination for residential and commercial outdoor applications such as yards, driveways, patios, loading areas and warehouses.

CONSTRUCTION

Two tool-free adjustable heads allow for easy aiming up/down or side to side. Rugged cast aluminum, corrosion-resistant housing in bronze or white. Clear acrylic lenses are fully gasketed to keep out moisture, dirt and bugs. 120V driver operates at 60Hz. Rated for outdoor installations, -40°C minimum ambient.

OPTICS

High-performance 4000K CCT LEDs produce 1770 lumens and maintain 70% of light output at 35,000 hours of service. (Nominal correlated color temperature per ANSI C78-377-2008; LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.) An integrated photocell turns light on at dusk and off at dawn for energy savings and convenience.

INSTALLATION

Mounts easily to existing junction box on wall or under building eave. Adjustable heads allow precise illumination.

LISTINGS

UL/C-UL Certified to US and Canadian safety standards. Wet location listed for mounting higher than 4' off the ground.

WARRANTY

1-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

NOTE: Actual performance may differ as a result of end-user environment and application.



All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications are subject to change without notice.

Outdoor General Purpose

OVFL

DUSK-TO-DAWN LED FLOODLIGHT
2 ADJUSTABLE HEADS

High Performance LED

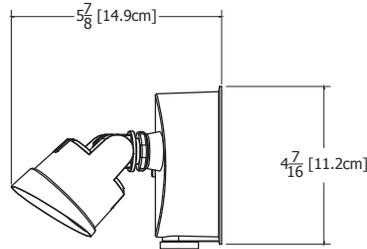

All dimensions are inches (centimeters).

ORDERING INFORMATION

All configurations of this product are considered "standard" and have short lead times.

Example: OVFL LED 2RH 40K 120 PE BZ


OVFL LED	2RH	40K	120	PE	
Series	Number of heads	Color Temperature	Voltage	Control	Finish
OVFL LED	2RH 2 heads, round	40K 4000K	120 120 volts	PE Dusk-to-dawn photocell	BZ Bronze WH White

2-Head LED Floodlight with Photocell

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

OVFL

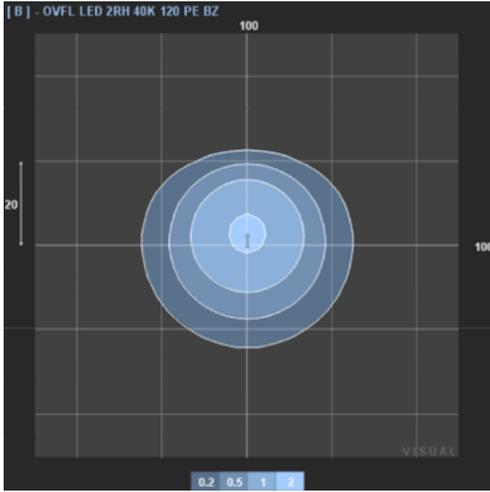

Lithonia Lighting

LED lighting facts
A Program of the U.S. DOE

Light Output (Lumens)	1770
Watts	20
Lumens per Watt (Efficacy)	88.5

Color Accuracy	80
Color Rendering Index (CRI)	

Light Color	4000 (Bright White)
Correlated Color Temperature (CCT)	

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: NJSM-SI3E7Q (3/24/2016)
Model Number: OVFL LED 2RH 40K 120 XX XX
Type: Luminaire - Other