

Outdoor Clock

with Temperature and Humidity



Remove the Weather-Resistant Cover

Access the battery compartment by pulling off the weather-resistant cover. Be careful not to damage the cover during removal.

Set the Time

Turn the set knob on the back of the clock in either direction.

O Install or Replace Batteries

AcuRite recommends high quality alkaline or lithium batteries for the best product performance. Heavy duty or rechargeable batteries are not recommended.

The clock requires lithium batteries in low temperature conditions. Cold temperatures can cause alkaline batteries to function improperly. Use lithium batteries in the clock for temperatures below -4°F / -20°C.


Insert 1 x AA alkaline or lithium battery into the battery compartment, as shown. Follow the polarity (+/-) diagram in the battery compartment. Replace the weather-resistant cover and secure using screws.

Calibrate the Temperature and Humidity

The pointer may move during shipping, causing the thermometer/ hygrometer to read temperature/humidity inaccurately. If the thermometer/hygrometer is reading incorrectly, compare the temperature/ humidity reading to a known accurate thermometer/hygrometer. Let both thermometers/hygrometers adjust to room temperature for at least three hours. If the new thermometer/hygrometer continues to read inaccurately, adjust the pointer by turning knob on the back of the unit in the appropriate direction.

DO NOT HANG IN DIRECT SUNLIGHT!

For the most accurate temperature readings choose a location that will not be exposed to direct sunlight or other direct heat sources.

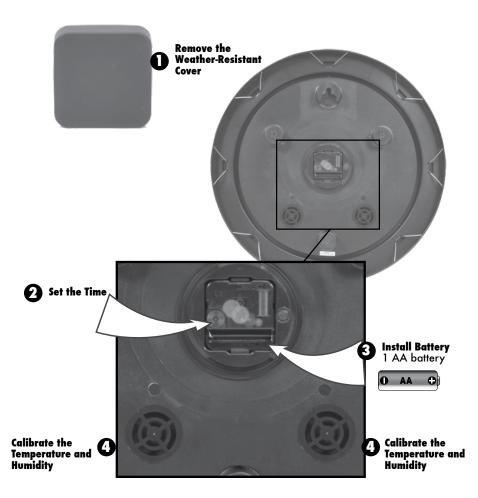

Care & Maintenance

Clock Care

- A soft cloth may be used to clean the clock, as needed.
- Do not use corrosive cleaners or chemicals on the clock.
- Always store the clock without a battery when not in use.



PLEASE DISPOSE OF OLD OR DEFECTIVE BATTERIES IN AN ENVIRONMENTALLY SAFE WAY AND IN ACCORDANCE WITH YOUR LOCAL LAWS AND REGULATIONS.

BATTERY SAFETY: Clean the battery contacts and also those of the device prior to battery installation. Remove batteries from equipment which is not to be used for an extended period of time. Follow the polarity (+/-) diagram in the battery compartment. Promptly remove dead batteries from the device. Dispose of used batteries properly. Only batteries of the same or equivalent type as recommended are to be used. DO NOT incinerate used batteries. DO NOT dispose of batteries in fire, as batteries may explode or leak. DO NOT mix old and new batteries or types of batteries (alkaline/standard). DO NOT use rechargeable batteries. DO NOT recharge non-rechargeable batteries. DO NOT short-circuit the supply terminals.