

### Features

- Single lever handle is simple to use and makes adjusting water temperature easy.
- Premium KOHLER finishes with ScratchShield™ technology withstands even the toughest daily use.
- Compatible with 1- or 3-hole sinks.
- One-piece, self-contained ceramic disc valve allows both volume and temperature control.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.

### Material

- Premium material for durability and reliability.

### Installation

- Simplified faucet assembly; mounting hardware requires no special tools.

### Water Conservation & Rebates

- 1.2 gpm (gallons per minute) flow rate.



ADA CSA B651 OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF 61  
NSF 372  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------



CP	Polished Chrome
BN	Vibrant® Brushed Nickel

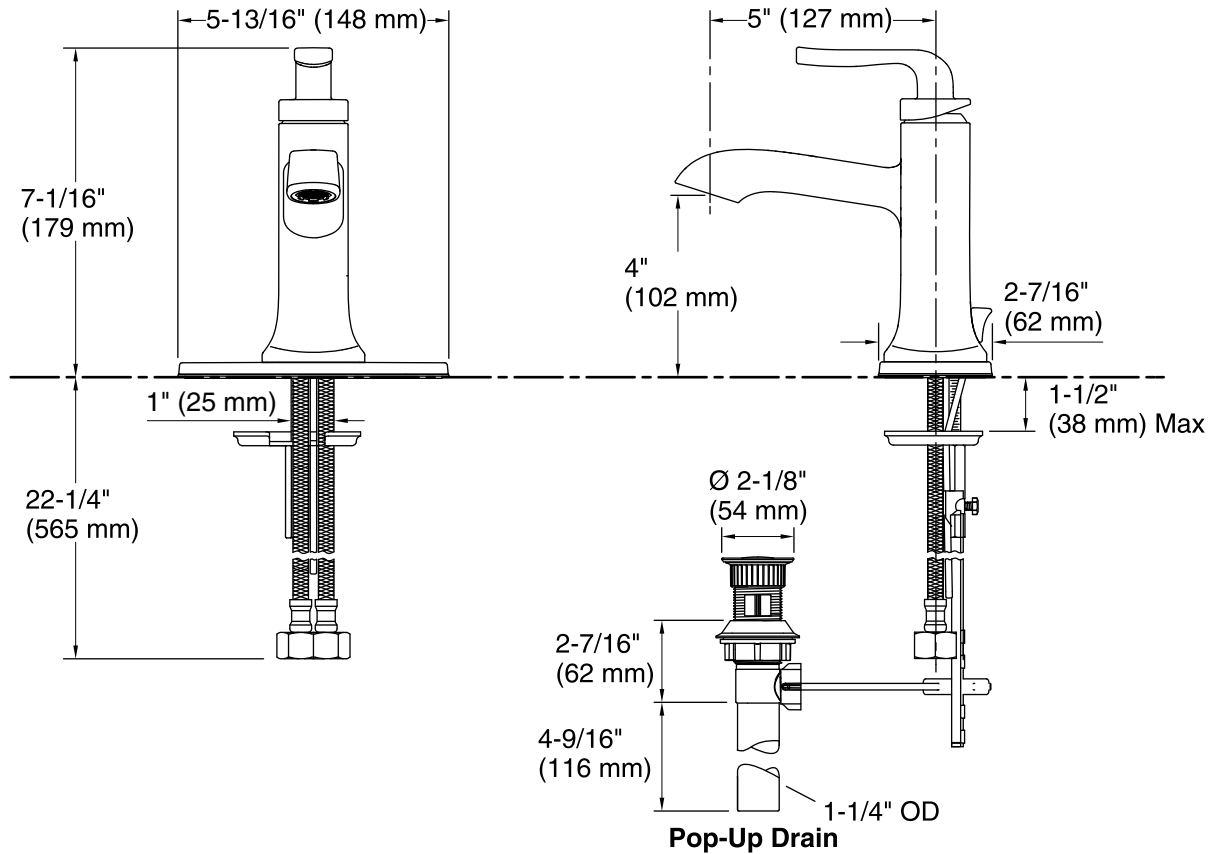

### Technical Information

All product dimensions are nominal.

Valve body:	Plastic
Drain included:	YES
Drain with overflow:	YES
Drain tailpiece included:	YES

### Spout:

Spout reach: 5" (127 mm)

### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)  
Pressure: 60 psi (4.1 bar)

### Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.