


Residential & Light Commercial Insulation

- + Energy saving thermal insulation*
- + Provides fire protection
- + Controls sound between floors and walls
- + Mold resistant²
- + Easy to install
- + Minimum 70% Recycled Content¹

Where can UltraBatt™ insulation be installed?

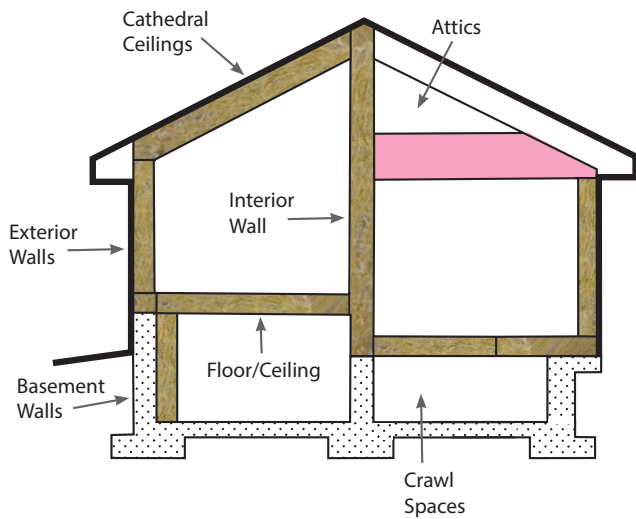

- Owens Corning® Fiberglas™ Insulation
- Thermafiber® UltraBatt™ Mineral Wool Insulation

Thermafiber® UltraBatt™



UltraBatt™ insulation provides exceptional R-value and fire protection in residential and light commercial buildings. UltraBatt insulation makes homes energy efficient and quiet.



UltraBatt™ insulation being installed in a residential wood stud application. The semi-rigid batts are denser than traditional batts, making them easy to install.



Thermafiber®



Thermafiber® UltraBatt™ Insulation


Description:

THERMAFIBER UltraBatt™ mineral wool insulation is designed to provide excellent thermal insulation, fire protection and noise control in residential and light commercial building. The semi-rigid batts are more dense than traditional batts or rolls, and are quick and easy to install. UltraBatt products are noncombustible, moisture-resistant, noncorrosive, nondeteriorating, and mold resistant.²

Product Options:

- Standard thicknesses are available with a vapor-retarding foil facing.
- Available in standard widths for both wood and steel stud framing.
- Non-standard thicknesses and sizes are available upon special request.

Installation:

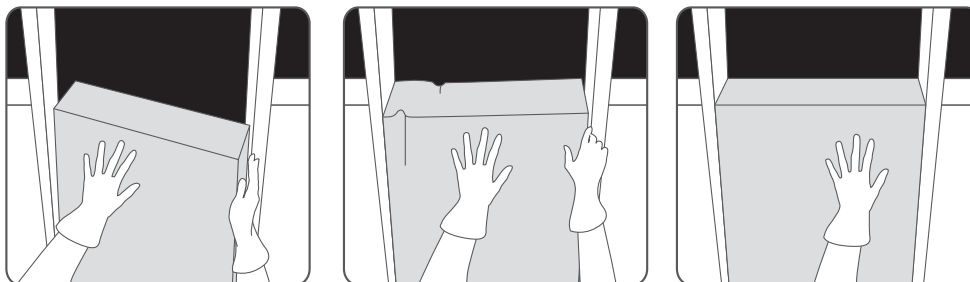

1. Measure & cut

UltraBatt™ insulation is easy to cut with a serrated knife for custom fitting around electrical boxes, pipes, duct-work, wiring, or between non-standard studs and joist.

2. Squeeze & insert

UltraBatt™ insulation is flexible and pliable; simply squeeze the sides to compress the insulation and insert into the desired wall.

3. Release & expand

Once in place, UltraBatt™ insulation naturally expands to fill in the space, creating a snug, custom fit.

Standard Sizes:

Wood Stud Application				Steel Stud Application			
R-Value*	Sizes	Pieces/Bag	SqFt./Bag	R-Value*	Sizes	Pieces/Bag	SqFt./Bag
R15	3.5" x 15" x 47"	5	24.5	R10	2.5" x 16" x 48"	8	42.7
	3.5" x 23" x 47"	5	37.5		2.5" x 24" x 48"	8	64.0
R23	5.5" x 15" x 47"	4	19.6	R15	3.5" x 16" x 48"	5	26.7
	5.5" x 23" x 47"	4	30.0		3.5" x 24" x 48"	5	40.0
R30	7.1" x 15" x 47"	3	14.7	R24	6" x 16" x 48"	4	21.3
	7.1" x 23" x 47"	3	22.5		6" x 24" x 48"	4	32.0

*R-Value is a measure of insulating ability. "R" means resistance to heat flow. The higher the "R" Value, the greater the insulation power. For more information refer to the UltraBatt™ Fact Sheet

Technical Data:

Product Designation	Tested to ASTM E 84			
	Unfaced		Foil Faced	
	Flame Spread	Smoke Developed	Flame Spread	Smoke Developed
UltraBatt™	0	0	25	0

Standards Compliance:

NFPA 101	Class A rated interior finish
ASTM C 665	Non-Corrosive
ASTM E 136	Rated Non-combustible per NFPA Standard 220
CAN/ULC S114	Complies
ASTM C 1104	Absorbs less than 1% by volume
ASTM E 96	Unfaced, 50 Perms as tested
ASTM E 96	Foil Faced, 0.02 Perms as tested
CAN/ULC S102	Flame Spread 0, Smoke Developed 0

Thermafiber Insolutions®:

Thermafiber offers industry leading technical and engineering assistance to architects, specifiers, and contractors. These services include CAD drawings, engineering judgments, LEED® Credit Information, and product recommendations. Contact our technical services department at 1-888-834-2371, or email technicalservice@owenscorning.com. For any additional information about other Owens Corning products, please call 1-800-GET-PINK®

Notice:

THERMAFIBER, Inc. shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. THERMAFIBER liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing within thirty (30) days from date it was or reasonably should have been discovered. * Savings vary. Find out why in the seller's fact sheet on R-values. Higher R-values mean greater insulating power.

¹ Recycled content verified by ICC-ES.

² ASTM C 1138

LEED® is a registered trademark of the U.S. Green Building Council

Pub.No. 10019756. Printed in the U.S.A. May 2015. The Pink Panther™ & © 1964-2015 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. © 2015 Owens Corning

