



Assembling the bottom frame

- □ Locate the desired position of the bottom frame (C). Ensure that it is no more than 6 in. from the floor.
- Place two tapered sleeves (A) into the appropriate groove on each pole assembly. Ensure the tapered end is up (see arrow on sleeve).
- □ Place the bottome frame (C) on its side and slide the each pole assembly with tapered locks through the bottom of the frame (C) until snug.
- After all pole assemblies are in place, position the unit in the upright position.
 Push down on each corner of the frame (C), ensure the frame (C) is in a fully locked

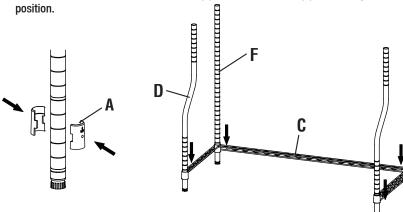

Assembling the Racks

- □ Locate the desired position of the cup holder (G), book rack (H) & coat rack (I). Place the tapered sleeves (A) on to the pole assemblies.
- □ Slide the cup holder (G) down from the top of the pole assemblies and onto the tapered sleeves (A). Repeat for the remaining book rack (H) & coat rack (I).

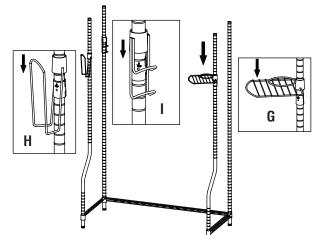

Safety Information

- 1. Two adults are recommended for ease of assembly. Use care when handing.
- 2. Assembly recommended on a soft surface, such as carpet, to avoid scratching flooring finish.
- 3. Discard the black circular plastic pieces. These are used to separate the shelves for shipping purposes.


Assembling the Shelf


- □ Locate the desired position of the shelf (B) and place the tapered sleeves (A) on to the pole assemblies.
- □ Slide the shelf (B) down from the top of the pole assemblies and onto the tapered sleeves (A).

Assembling the posts

Screw a top pole (E) to a bottom pole (F) &

- Push down on each shelf (B) corner, ensuring the shelf (B) is in a fully locked position.
- Repeat for the remaining shelf (B).








CAUTION: Each shelf holds up to 150 lbs, evenly distributed. Do not overload.



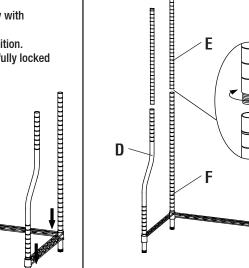

bend pole (D).