



900 Series Pet Patio Door

Installation Instructions

For: 75³/₈" to 80³/₈" or 91" to 96" Doors

Patent Pending



Before You Get Started...

- It is important to read all instructions carefully and make sure you have all the parts listed below before beginning pet door installation.
- Your pet door may be installed on the right or left side depending on which way your sliding door opens.
- There are several lock styles for aluminum sliding doors. See page 4 to determine which lock you have.
- If you need help with any part of the installation, call one of our associates Toll Free at (800) 378-4385 (M-F, 9 am to 4 pm, PST) and they will be happy to help you free of charge.


As with any home improvement project, if you do not have the tools or skills to properly install your pet door, we suggest using a professional handyman or licensed contractor.

Tools Required For Installation –




Parts List –

1. Hangers (2)
with 3/16" x 1-1/2"
Screws (4)
(POLY BAG #1)

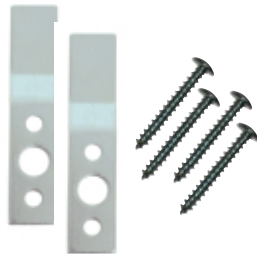

2. Lock Catch (2)*
with Screws (4)
& Spacers (4)*
(POLY BAG #2)

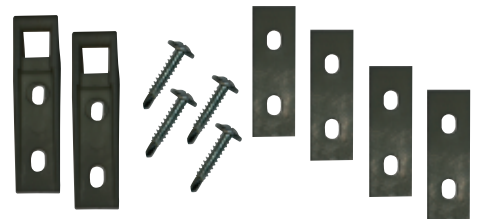

*Parts color may be white

3. Door Seal Extrusions (4)




4. Draft•Seal™*
(2) Flat Pieces



*Parts color may be white

5. Filler Plate (1) and
5/8" x 3/16" dia.
Self Tapping
Screws (2)
(POLY BAG #1)



6. Lock Button Override (1)*
(see page 4)
(POLY BAG #2)



*Parts color may be white

7. Latch Adapter (1)
with Screws (2)
(see page 4)
(POLY BAG #2)




Installing Your 900 Series™ Pet Door

Step #1-Installing the Pet Door

Remove existing Lock Catch plate as it may interfere with your new Pet Door (see Picture #1).

If your catch plate is 3/4" wide or less, you can re-install into the Pet Door with self-tapping screws provided.

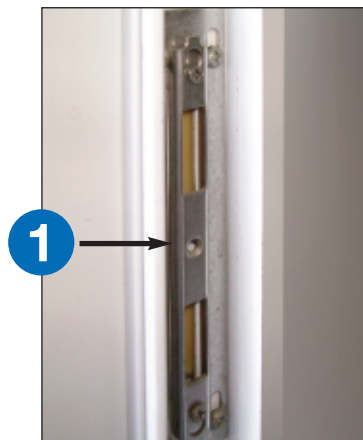

Poly Bag #1 contains 2 Hangers and 4 Screws 3/16" x 1-1/2" long.

First, locate position of hangers.

For 80" Door (see Sketch A).




Mark 2 lines inside door frame, the lower at 12" and the upper at 60" from bottom of track. Place bottom edge of lower hanger on 12" and the upper on 60".

For 96" Door (see Sketch B).

Mark 2 lines inside door frame, the lower at 12" and the upper at 64-1/2" from bottom of track. Place bottom edge of lower hanger on 12" and the upper on 64-1/2".

Mark location of screws with pencil and drill 1/8" hole approx. 1-1/2" deep.

Place hangers in track and install using 3/16" x 1-1/2" screws (see Picture #2).

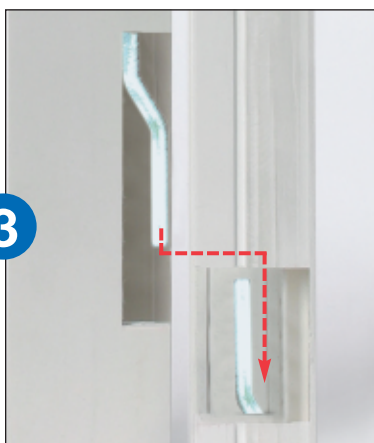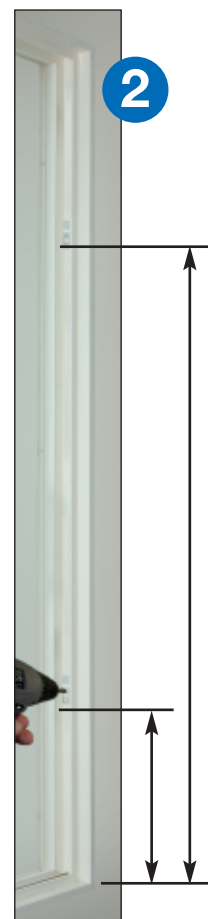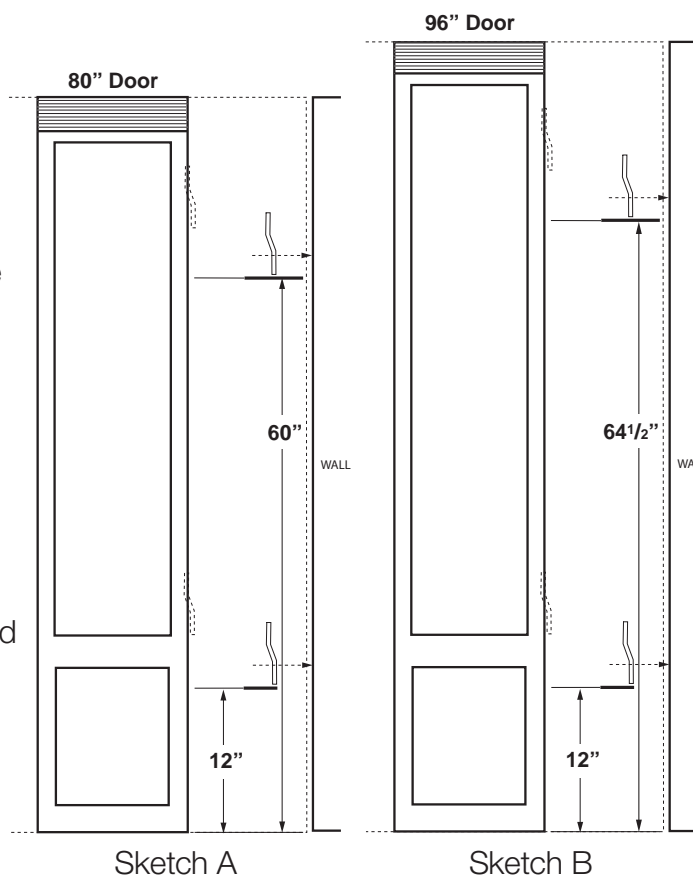

Lift and locate Pet Door in place (see Picture #3).


Continue to Page 3...

Continuing the Installation...

Step #2- Securing the “Spring Loaded” Top Section


With “Spring Loaded” Top Section inside of door frame, secure by using 2 5/8” x 3/16” dia. Self Tapping Screws.

Install screws 5/8” from edge of glass through the left and right side of “Spring Loaded” Top Section into 900 Series Pet Door (see Picture #5).

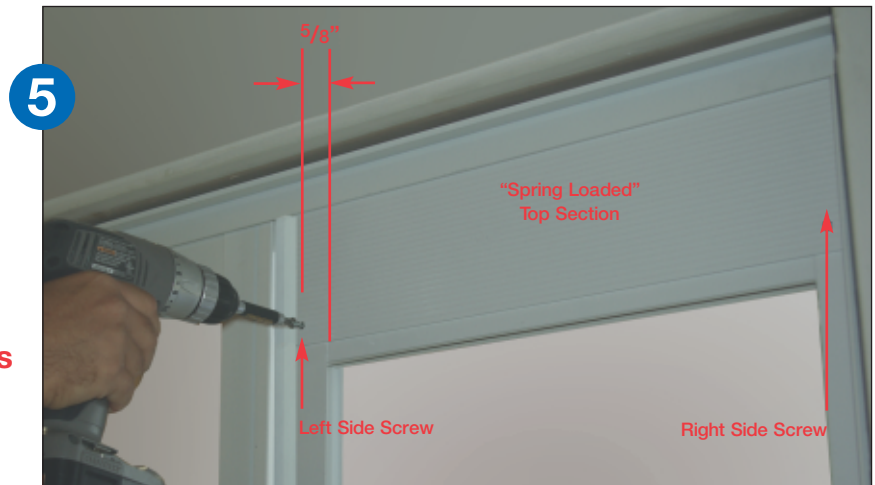

Continuing the Installation...

Step #3-Installing the Door Seals

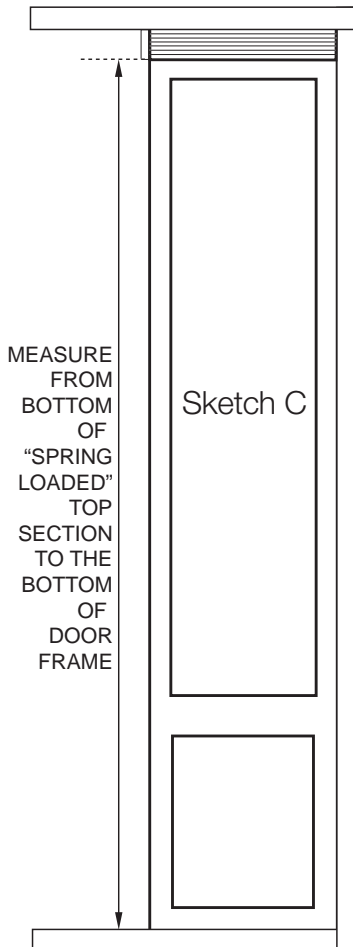


There is a Filler Plate that fits against the edge of the “Spring Loaded” Top Section of your door. Peel tape and install the Filler Plate (as shown in Picture #6–A & B).

Your pet door includes 4 Door Seal Extrusions which mount on to the edge on the side of the 900 Series Pet Door Panel. To properly measure for installation, measure length from the bottom of the door frame to the bottom of the “Spring Loaded” Top Section (see Sketch C).

Make sure this is done with the door installed.

After measuring length, use a hack-saw to cut Door Seal Extrusions to length (see Picture #7) and press on to edge of door (see Picture #8).

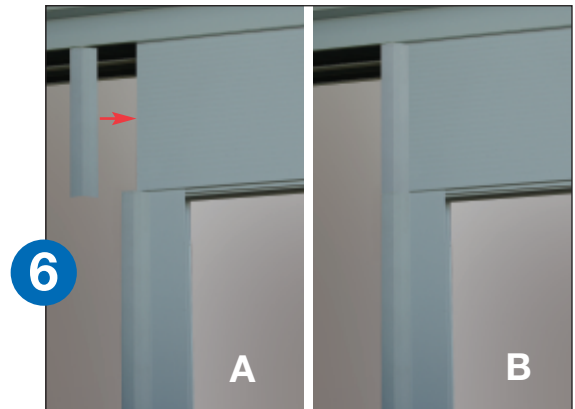

Continue to Page 4...


Continuing the Installation...

Step #4-Installing the Lock Catch

Our instructions will cover the majority of sliding door locks. If your door lock is not compatible with the enclosed lock components, you can use an alternate method of securing your door. Please call us Toll Free at **(800) 378-4385** for more information.

NOTE: Many sliding doors have an adjustable locking mechanism. To increase or decrease the locking strength of your door, turn Adjustment Screw in or out.

If your lock looks like this...

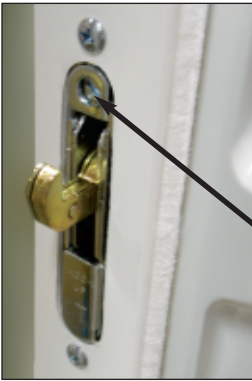

Single Hook-Style Door Lock

...then place One Lock Catch and Spacer like this.



Front View Side View

Adjustment Screw

If your lock looks like this...



Double Hook-Style Door Lock

...then place Two Lock Catches and Spacers like this.



Front View Side View

Adjustment Screws

If your lock looks like this...



Double Hook Reverse-Style Door Lock

...then place Two Lock Catches and Spacers like this.



Front View Side View

Adjustment Screws

If your sliding door lock has a small button below the latch hook...



...you will need to install the Lock Button Override.

10

Peel paper off the two-sided tape. Position pin to depress the lock button and press firmly in place (see Picture #10).

If your sliding door lock has a latch lock... you will need to install the Latch Adapter.

Position Latch Adapter to line up with latch lock when door is closed. Secure with the 2 self-tapping screws, included (see Picture #9).

NOTE: You will need to remove door seal and cut to fit around the Latch Adapter.



9

Continue to Page 5 to finish installation...

Continuing the Installation...

Step #4-Installing the Lock Catch (continued)

Place Lock Catch onto your existing door lock hook in the up (locked) position (see Picture #11).

11



12

Partially close your sliding door so that you can mark the location of the top edge of Lock Catch inside your pet door frame (see Picture #12).

WARNING: SCREWS PROVIDED ARE SELF-TAPPING, NO DRILLING REQUIRED. DO NOT USE DRILL BITS IN ANY PART OF INSTALLATION ON THIS PAGE.



13

Open door, relocate Lock Catch to line up with pencil and mark holes (see Picture #13). Install Lock Catch, using self-tapping screws provided in Poly Bag #2 (see Picture #14). Use Spacer if needed. Lock Catch has slotted holes for adjustment if necessary.

14



If your sliding door has double hook-style lock, repeat steps for second hook.

Finishing the Installation

Step #5-Attaching the Draft•Seal™ and Optional Sliding Door Adjustments

15



The Draft•Seal™ (combined in 2 pieces) attaches to the moving section of your sliding glass door. To install the Draft•Seal™, measure the vertical distance, or height of exposed glass between top and bottom frames of the sliding door and using this length, cut Draft•Seal™ to size with scissors.

First, clean the surface of frame with household glass cleaner, then starting at top, attach Draft•Seal™ by aligning edge so that it rubs lightly against glass. (see Picture #15) Pull paper off tape and gently press in place while working slowly down the Draft•Seal™. Do not press too firmly in the event that repositioning is necessary. Be sure that vinyl rubs lightly against glass all the way down length of glass. Press Draft•Seal™ firmly in place along entire length when you are satisfied it is correctly placed.

Note: If the sliding door portion of your patio door is not plumb with the 900 Series Pet Door Panel, you may need to adjust the bottom rollers on the sliding patio door. Please refer to the manufacturers adjustment instructions for your specific sliding patio door style.



For more information, visit us online.

Need Help... Glass Broken... Missing Parts...



Please Do Not Return Merchandise To The Store
Before You Call Us TOLL – FREE For Assistance.

1(800)378-4385

We'll Provide You With:

- Prompt Shipment of Missing or Defective Parts
(At No Cost To You!)
- Free Technical Assistance Monday-Friday
8:00 a.m. – 5:00 p.m. PST

Or..Visit Us On The Web At: www.idealpetproducts.com

Limited Lifetime Warranty

We believe that our pet door is the most durable on the market. That's why we were the first to offer a Limited Lifetime Warranty. All parts are guaranteed to be free of manufacturers defects. Lifetime Warranty applies to the original purchaser with proof of sales receipt. All defective parts will be replaced by Ideal Pet Products, Inc.