

Features

- Brass construction
- One-piece, self-contained ceramic disc joystick valve actuation allows both volume and temperature control.
- Single-hole installation.
- Single-handle.
- 5-5/16" (135 mm) spout reach.
- Stationary spout.
- Touch-activated drain with tailpiece and overflow.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)].



For complete listing of available colors, go to kohler.com.

ADA

CSA B651

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

ADA

ICC/ANSI A117.1

DOE - Energy Policy Act 1992

CSA B651

OBC


All applicable US Federal and State material regulations

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Product Specification

Bathroom sink faucet shall be 5-5/16" (135 mm) spout reach and 3-1/2" (89 mm) spout outlet height. Bathroom sink faucet shall be brass construction. Bathroom sink faucet shall be single-handle. Bathroom sink faucet shall be touch-activated drain with tailpiece and overflow. Bathroom sink faucet shall be for single-hole installation. Bathroom sink faucet shall be KOHLER Model K-14760-4.

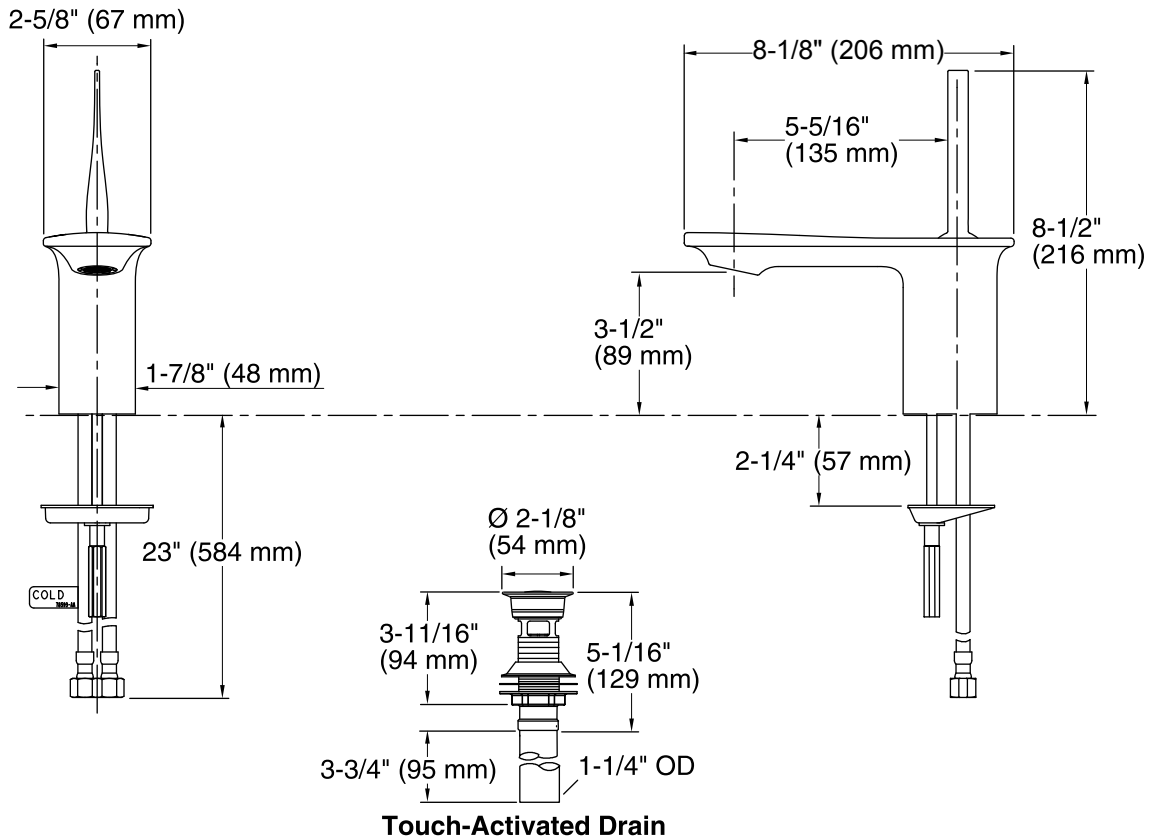

Technical Information

All measurements are nominal.

Spout reach: 5-5/16" (135 mm)

Drain included: YES

Drain with overflow: YES

Drain tailpiece included: YES

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Installation Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.