


For our most up-to-date instructions, to request missing, lost, or broken parts, or for any other Customer Service issues, please visit our website at **www.walkeredison.com** or call us at 877-207-5906.

Revised 022012

General Assembly Guidelines


- I. Insure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to insure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The main types of hardware used to assemble this product are wood dowels, screws, bolts and washers.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.




In future assembly steps when dowels are necessary to attach assembly parts together, place a small amount of glue on the end of the dowel before attaching parts together. Wipe away excess glue immediately.




VI. A Phillips head screwdriver is required for the assembly of this product.



VII. Power tools should not be used to assemble this product.




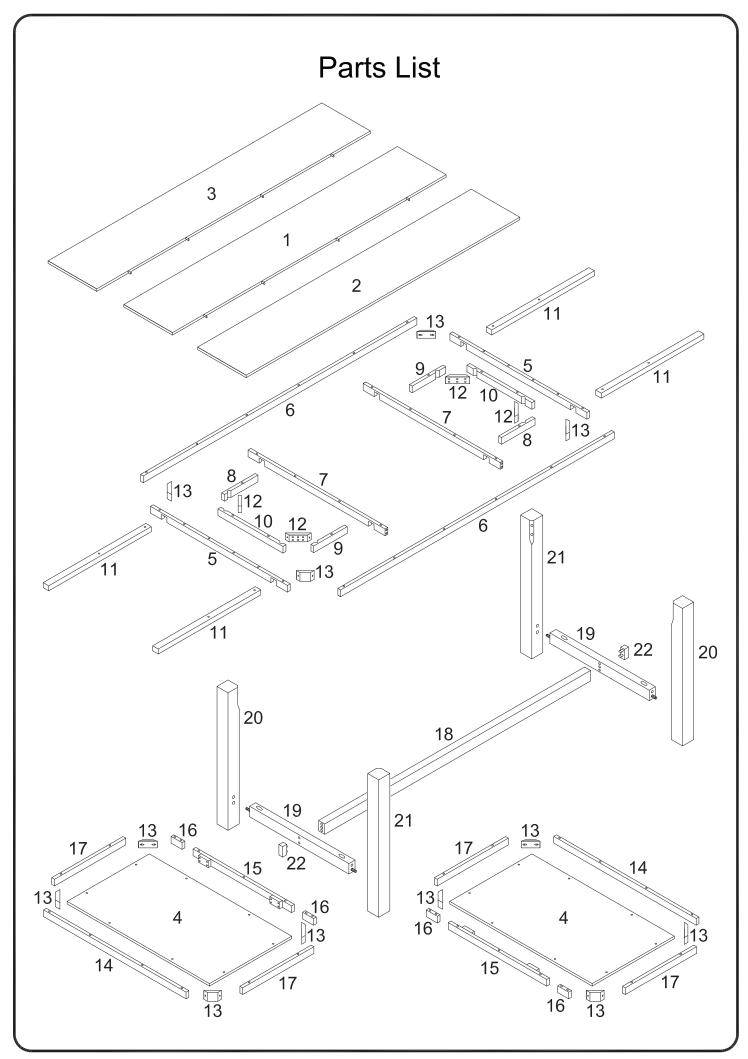



Hardware List


A		Ø10*35(mm)	Wooden dowel	64 pcs
В	<aaccelering< td=""><td>Ø4*38(mm)</td><td>Long screw</td><td>4 pcs</td></aaccelering<>	Ø4*38(mm)	Long screw	4 pcs
С	Autter &	Ø4*32(mm)	Short screw	110 pcs
D		Ø6*70(mm)	Bolt	2 pcs
Е		Ø8*60(mm)	Bolt	8 pcs
F	\bigcirc	Ø5/16"	Spring washer	8 pcs
G	\bigcirc	Ø5/16"	Washer	8 pcs
Н	EF3		Table lock	4 pcs
J	6 40		Table lock	4 pcs
K	Atter (b)	Ø3.5*16(mm)	Screw	24 pcs
L			Bracket	4 pcs
М	D	M4(mm)	Allen	1 pc
Ν		M5(mm)	Allen	1 pc
Ρ	2		Glue	2 pcs


The hardware quantities listed above are required for proper assembly. Some extra hardware may also have been included.

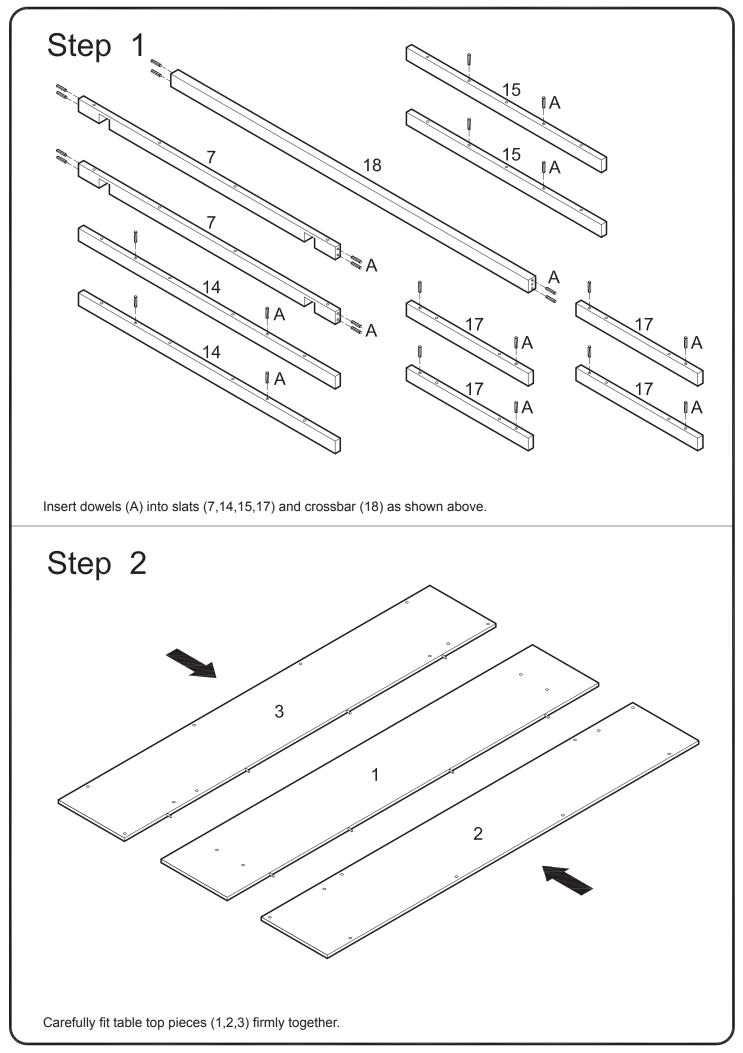


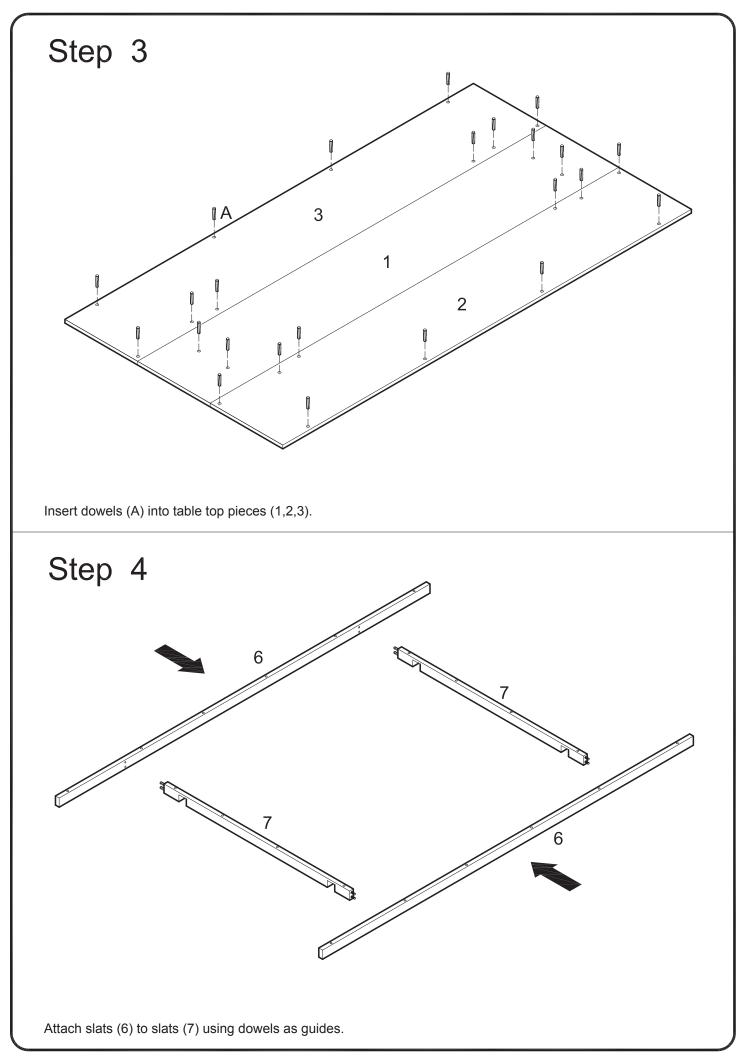


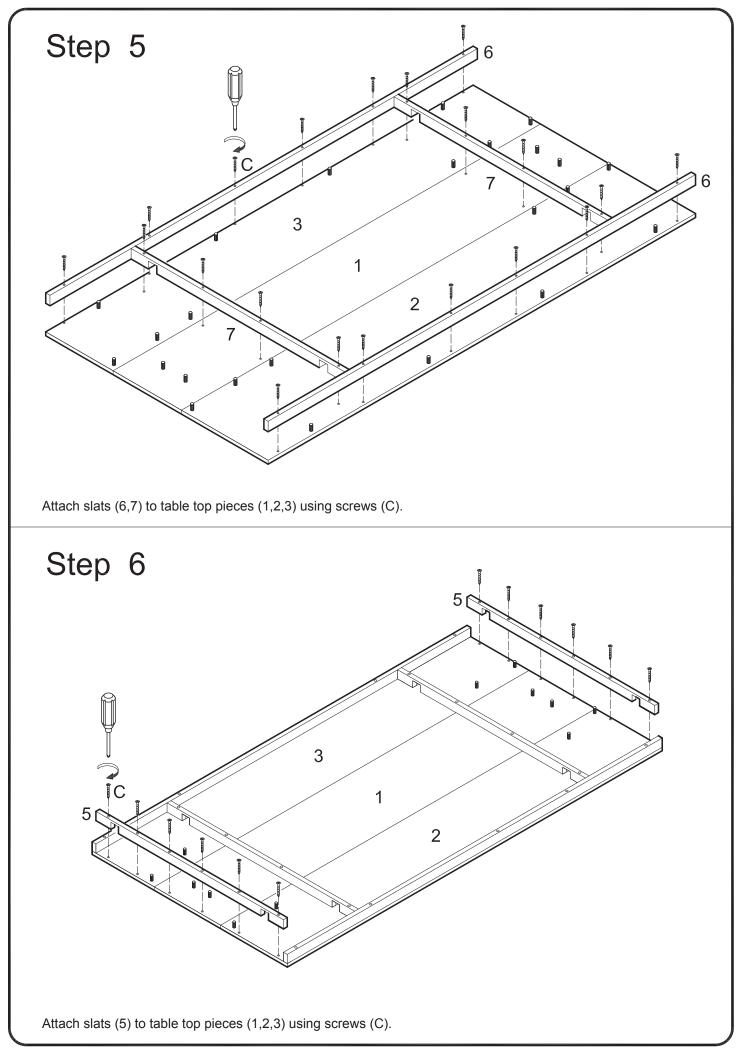

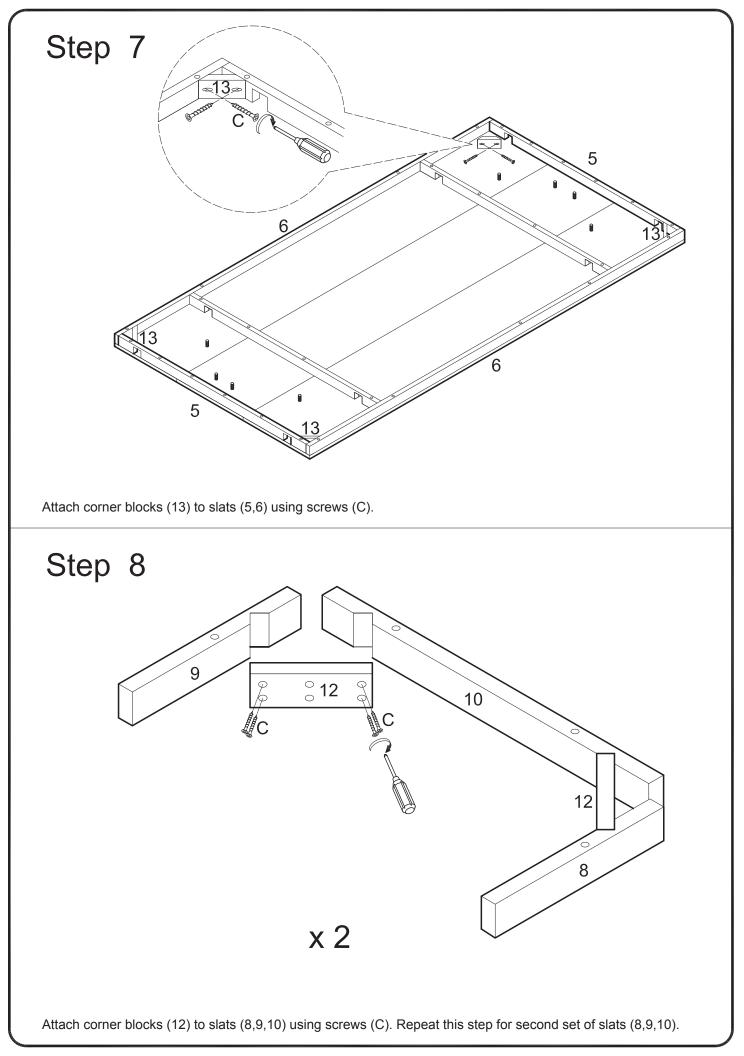


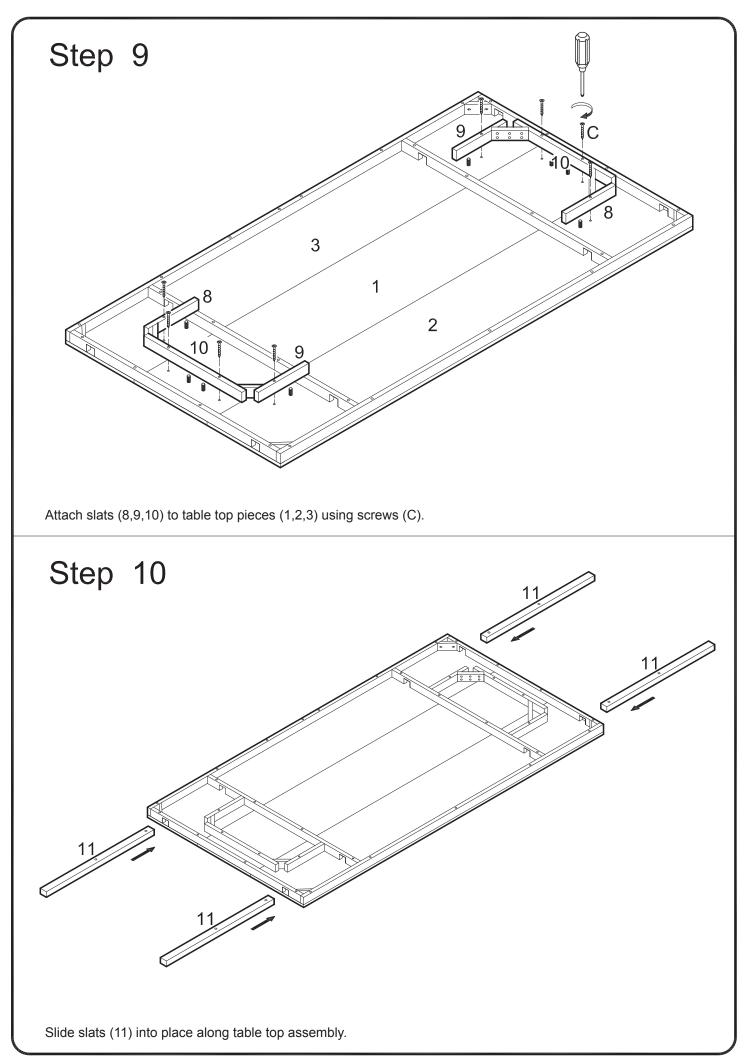

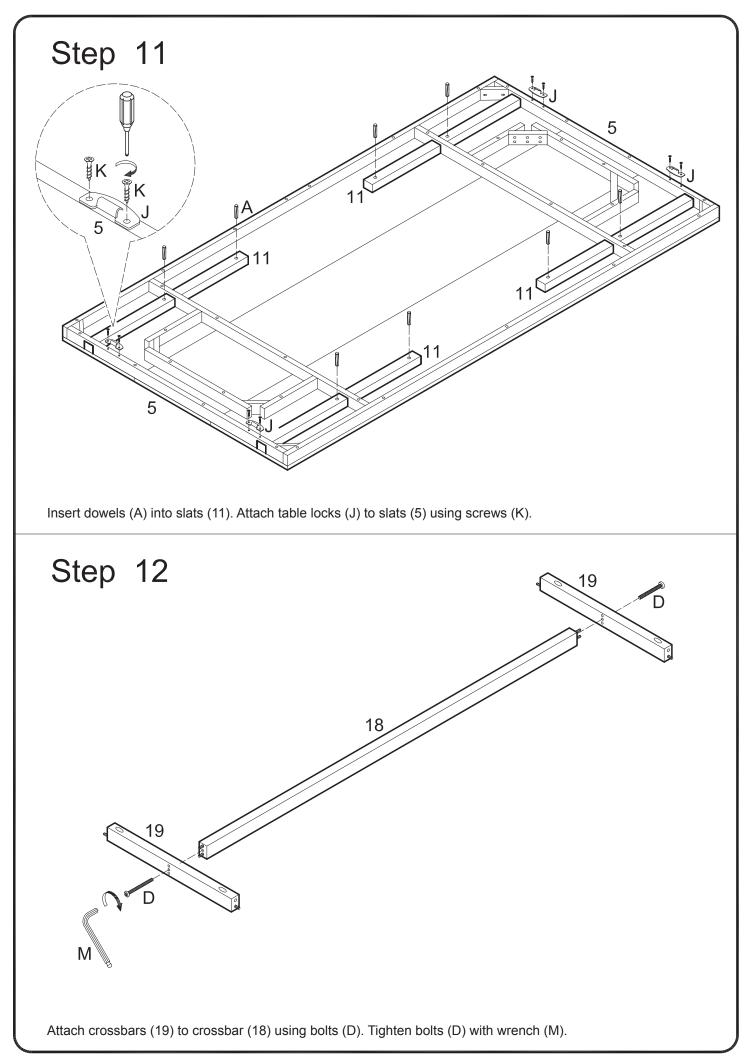

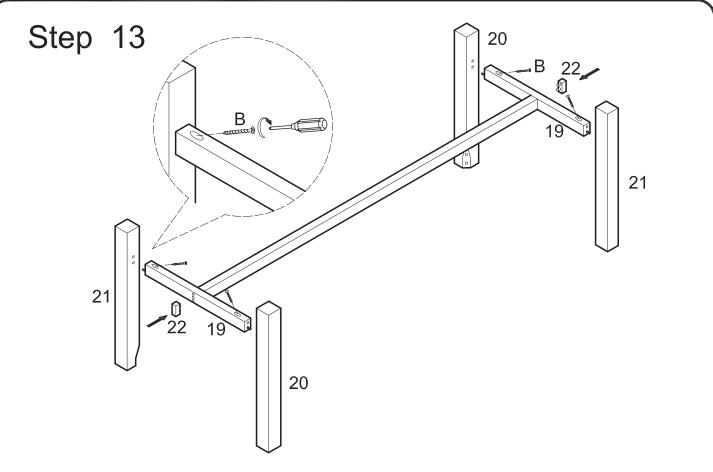

Attach crossbars (19) to legs (20,21) using screws (B). Attach end caps (22) to crossbars (19) using dowels as guides.

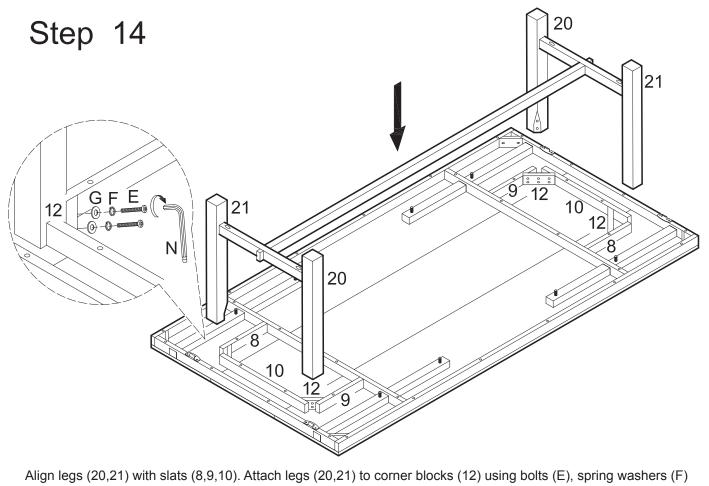

and washers (G). Tighten all bolts (E) with wrench (N).

