

OPERATION




CAUTION:
Avoid injury!

- Before dumping cart, park machine safely.
- Before backing up, make sure the area is clear of bystanders, especially children.
- Make sure cart is installed to the towing machine.
- Keep hands, feet and other body parts away from unloading areas and locking points to prevent injury from hauled materials or the cart itself.


STEP 1

Press down on the foot pedal to release the lock and rotate cart to the standard unloading position.

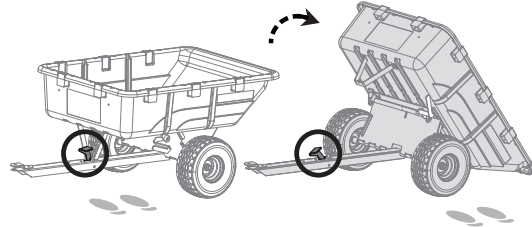


STEP 2

Pull the lever and continue to guide the range of motion, flipping the bed of the cart toward an 180° unload.

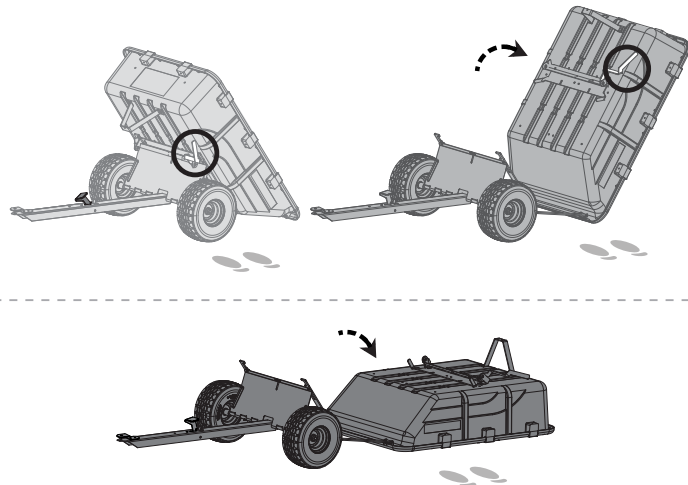

STEP 3

After unloading the cart, be sure to return it to the normal transport position and lock securely in place.

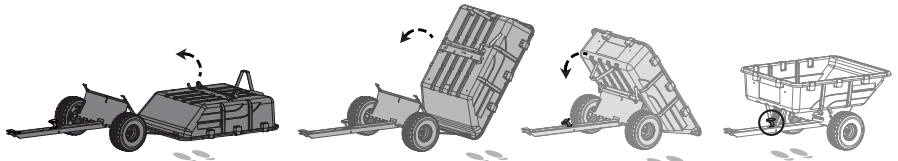

INSTALLATION QUESTIONS? MISSING PARTS? NEED REPLACEMENT PARTS?

DON'T GO BACK TO THE STORE!

Please call Customer Service Department Toll Free 877-728-8224 OR Email: customerservice@brinly.com

Brinly-Hardy Company • 3230 Industrial Parkway • Jeffersonville, IN 47130 • (877) 728-8224